



Customer approval :

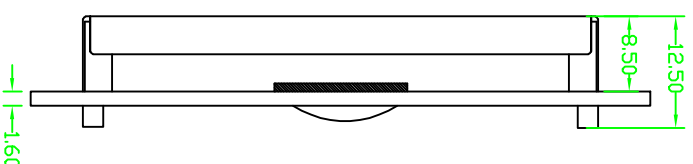

Specification:

- 1). Driving: Dots:128*64,Duty:1/64,Bias:1/9,VDD: 5V,VOUT: -4.9V,VO: -4.2V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: STN/(Y-G)POSITIVE/TRANSPARENT
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC: KS0107
- 6). Backlight: Y-G
- 7). Dimensions with mark "*" are important,
with mark "(" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	CS1	CS2	GND	VCC	VO	RS	R/W	E	DB0	DB1
PIN	11	12	13	14	15	16	17	18		
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK		

REV	REVISION RECORD	DATE	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd			
A0	First issue	11/18				
			MODEL NO.	SYB12864L2V11-5C9YL3N7R-B5WG		
			模 组 型 号			
			APPROVED BY	CHECKED BY	DRAWING BY	
			Liu	Francis	Luoxian	
			2012/11/18	2012/11/18	2012/11/18	
			GENERAL TOL: ± 0.3 未 注 公 差			
			PAGE: 1 OF 1	UNIT: mm		
			PROJECTION 三 角 法			