
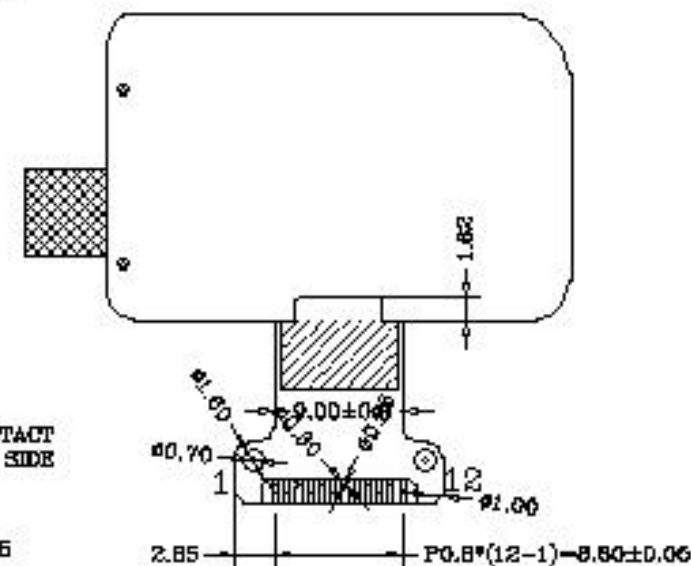
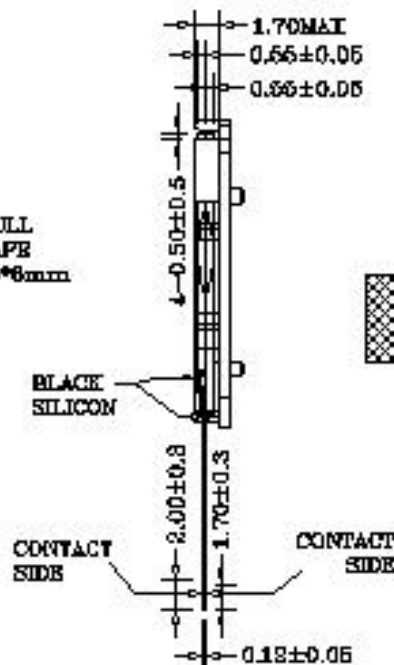


请着重确认红色标注尺寸

Ver	Date	Modify Contents
V02	2018-2-28	更改背光
V03	2018-3-7	更改背光灯槽尺寸


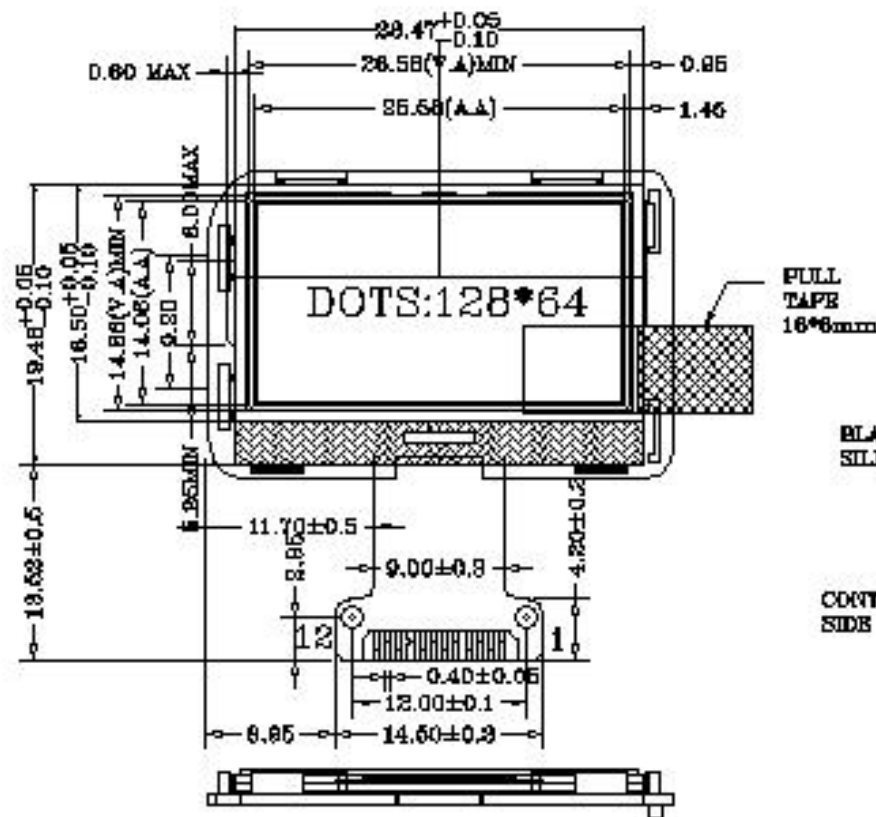


NOTE:

1. GENERAL TOLERANCE: $\pm 0.2\text{mm}$
2. THE PART OF *ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	FSTN	BACKLIGHT COLOR	——
POLARIZER TYPE	TRANSMISSIVE	FRAME TYPE	——
DISPLAY TYPE	POSITIVE	DATA TRANSFER	4SPI
LCD COLOR	——	CONNECTOR TYPE	FPC
VIEWING ANGLE	6:00	TECHNOLOGY	COG
OPERATING TEMP	-10°C ~ +60°C	DC-DC IC	Within
STORAGE TEMP	-20°C ~ +70°C	LCD DUTY	1/64
BACKLIGHT TYPE	——	LCD BIAS	1/9
CONTROLLER IC	ST7567A		ROHS
REMARKS	VDD=3.0V(typ), V _{LED} =8.7V(typ)		

Pin	DESC
1	CSB
2	RSTB
3	A0
4	SCL
6	SDA
6	VDD
7	VSS
8	VO
9	I/O
10	VG
11	NC
1E	NC



ANHUI GOLDEN VISION LCD SCIENCE & TECHNOLOGY CO., LTD.

安徽金视界光电科技有限公司

PRODUCT NO.	GVH12864GFFL081-21177A LCM				
DRAWN BY	CQ 2018-3-7	SCALE	1:1	REV.	V03
CHECKED BY		PAGE	1/1		
APPROVED BY	FRANK 2018-3-7	UNIT	mm		

发至: ☐开发 ☐COG质量 ☐COB质量 ☐测架 ☐FAE ☐LCD贴片