



IEC Connector EN60320 C14

0714Series

Power Rating : 10A 250V AC European

15A 125V AC UL & CSA

Insulation Resistance : over 100M Ω 500V DC

Electric Strength : 2,000V AC for One Minute

Operating Temperature : -25°C to +70°C

Main Unit Material : Thermoplastic UL Flammability
94V-0 & Copper Alloy







Unique Features : Ensure Free of

- Discontinuity
- Short Circuit on Rear Plane
- Hi-Pot Breaking
- Arcing




Power Inlet

Unit : mm

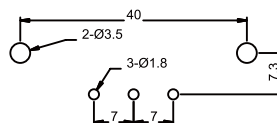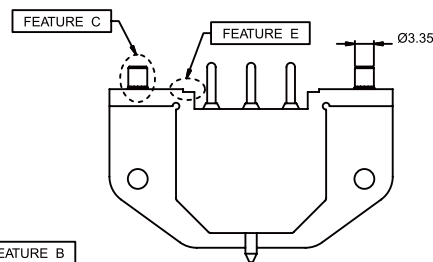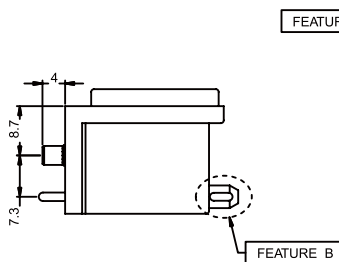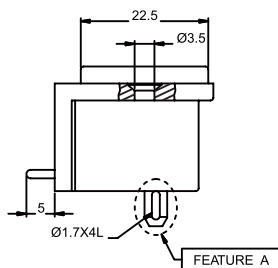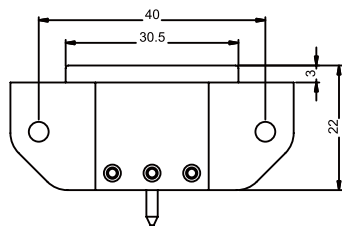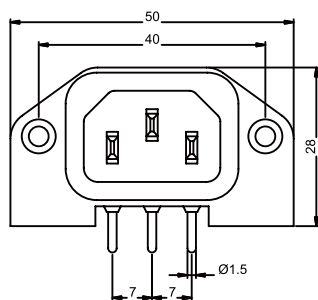

PCB LAYOUT

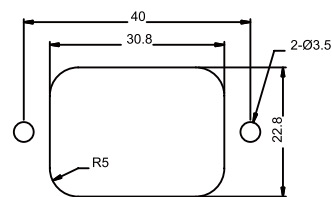

PANEL CUT-OUT

MODEL NO.	SOLDERING GROUND TERMINAL OPTION	RIVET OPTION	STEP OPTION
0714-CR7	A	—	D
0714-CR71	A	C	D
0714-CR7-A	—	—	D
0714-CP7N	B	—	E
0714-CP71N	B	C	E

* Flat ear option on request.

