


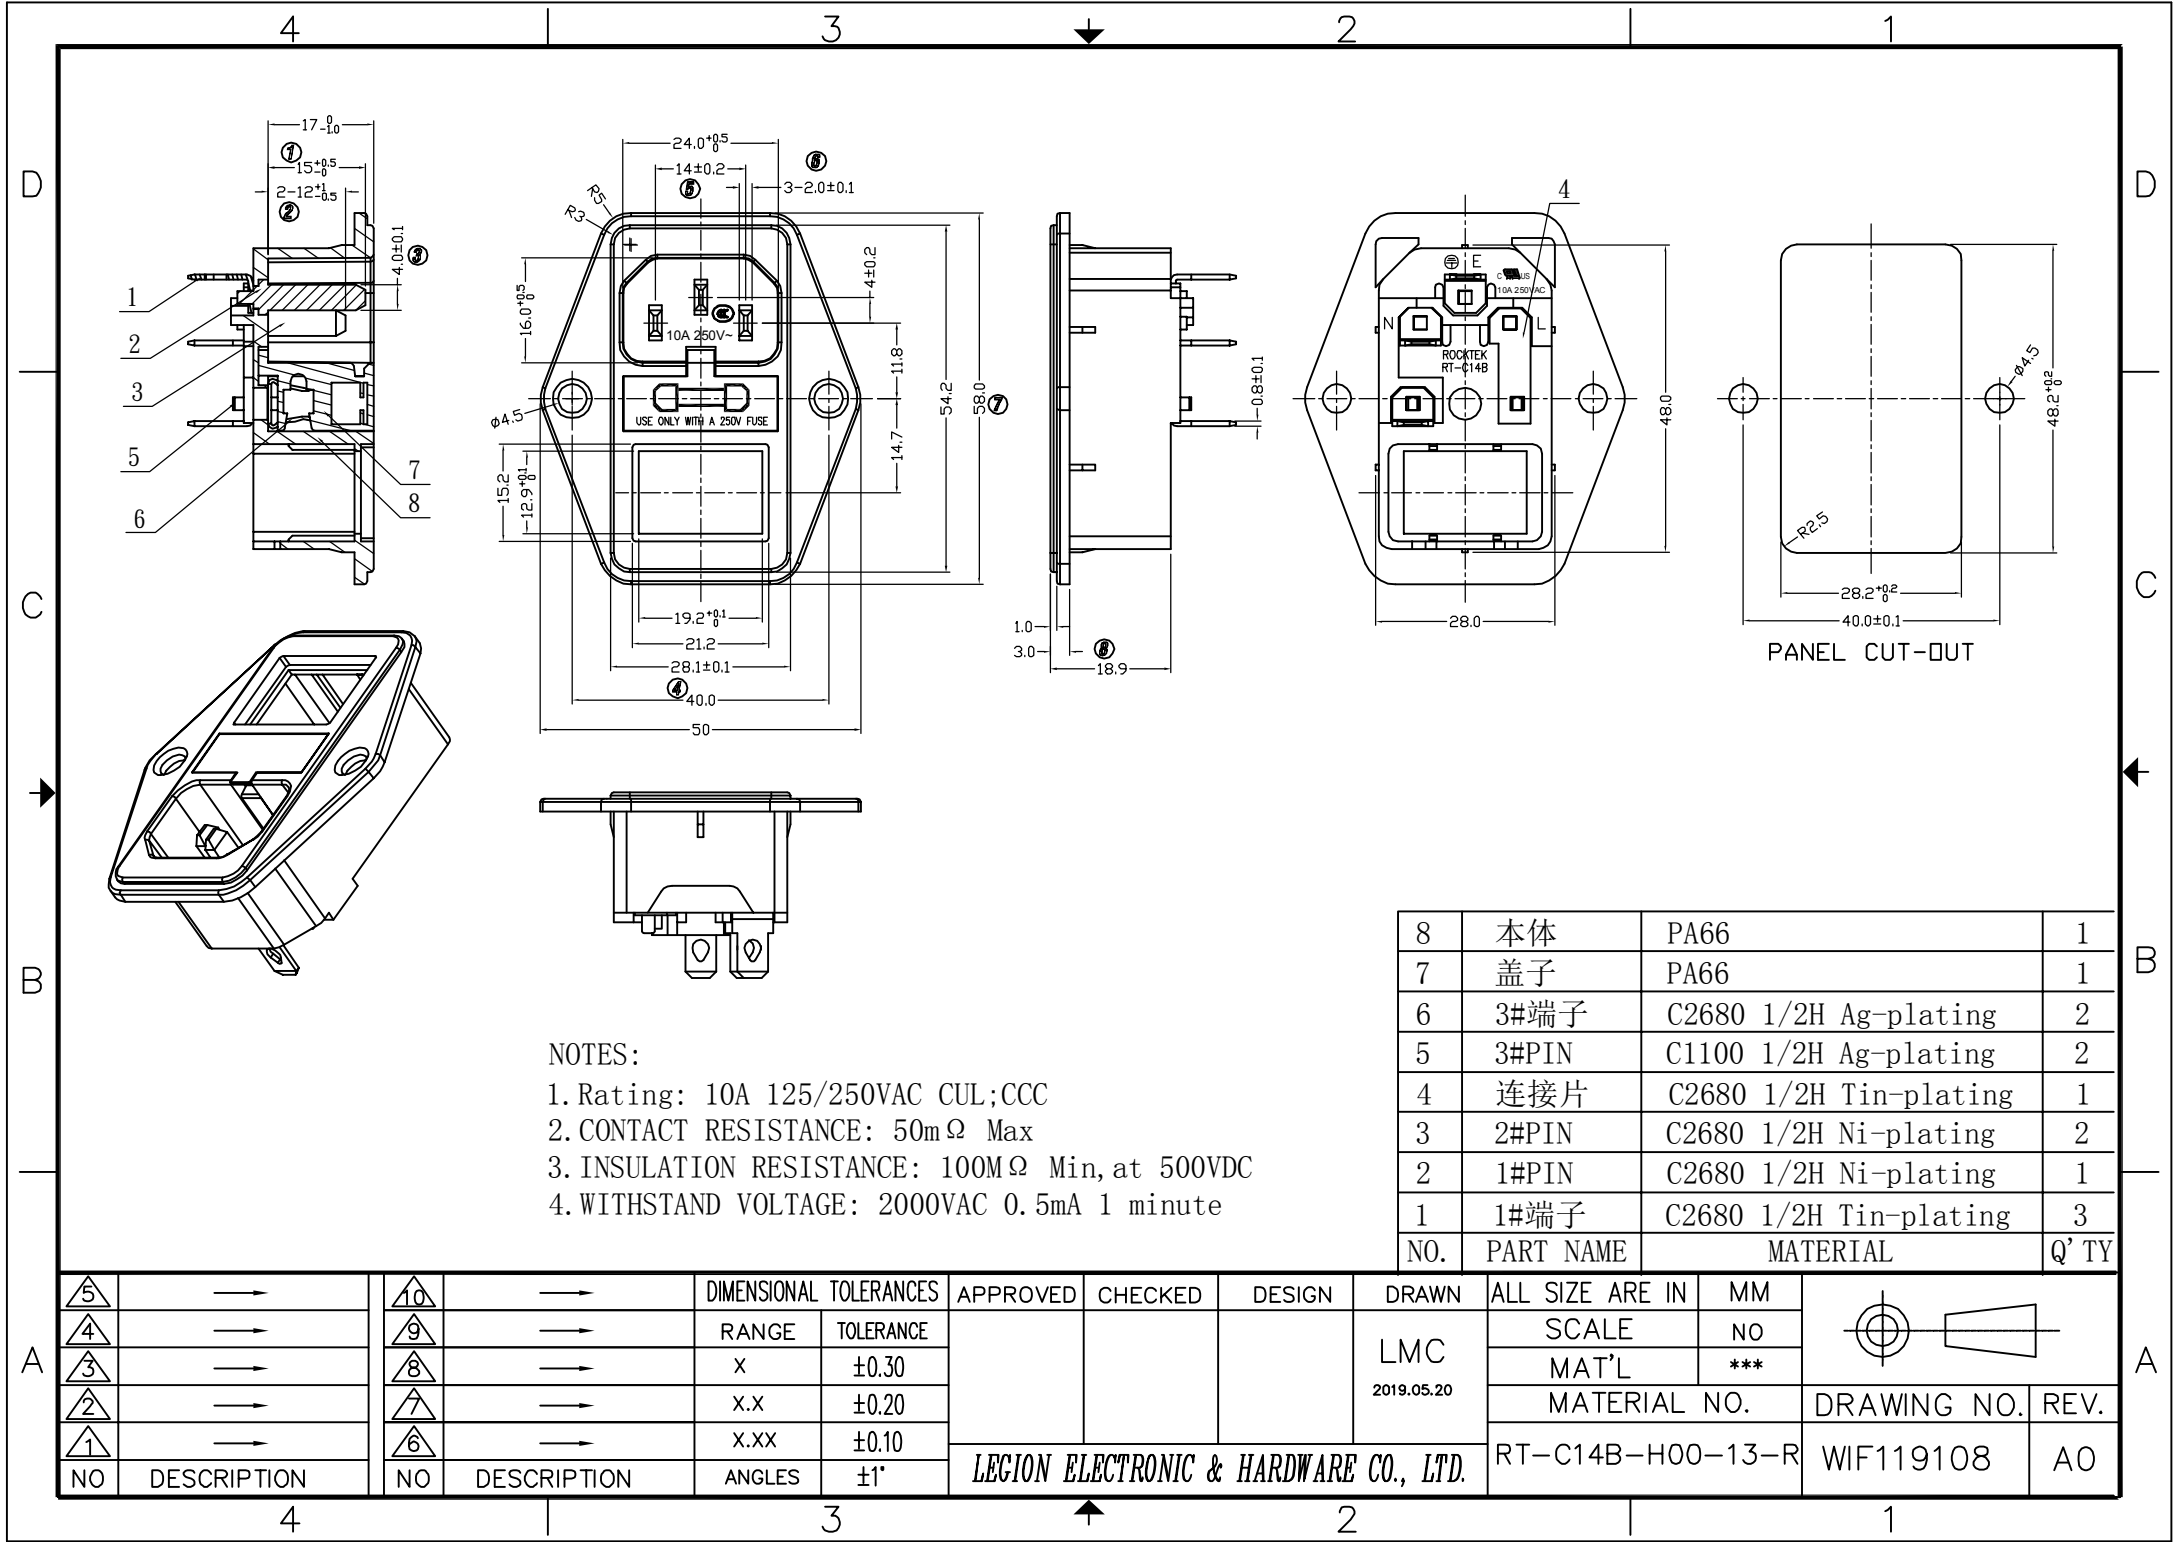

NOTES:
1. Rating: 10A 125/250VAC CUL;CCC
2. CONTACT RESISTANCE: 50mΩ Max
3. INSULATION RESISTANCE: 100MΩ Min, at 500VDC
4. WITHSTAND VOLTAGE: 2000VAC 0.5mA 1 minute

8	本体	PA66	1
7	盖子	PA66	1
6	3#端子	C2680 1/2H Ag-plating	2
5	3#PIN	C1100 1/2H Ag-plating	2
4	连接片	C2680 1/2H Tin-plating	1
3	2#PIN	C2680 1/2H Ni-plating	2
2	1#PIN	C2680 1/2H Ni-plating	1
1	1#端子	C2680 1/2H Tin-plating	3
NO.	PART NAME	MATERIAL	Q' TY

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN		MM				
4	→	9	→	RANGE	TOLERANCE				LMC 2019.05.20	SCALE		NO			DRAWING NO.	REV.
3	→	8	→	X	±0.30					MAT'L		***				
2	→	7	→	X.X	±0.20					MATERIAL NO.						
1	→	6	→	X.XX	±0.10											
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.				RT-C14B-H00-13-R		WIF119108	A0			