

The specification of LED Flood Light



Part No. : FL10W、FL20W、FL30W、FL50W、FL60W、 FL150W FL200W

★ Application:

Our LED flood lights are widely used in street road, fishing boat, commercial building, gas station etc.

★ product features :

1. The body is used with cast aluminum and Surface anodic oxidation treatment, they have good heat dissipation and The light body beautiful and exquisite.
2. The main structure of light body parts are used the new aluminum body. They have the advantages of impact resistance, corrosion resistance.
3. The main heat radiating component lamps are used with ultra high thermal conductivity aluminum materials which processed by special technology
4. The reflector is used with high-purity aluminum material with good reflectivity.
5. The glass is used with High intensity tempered glass. After the special craft processing, they have a good light transmittance and anti ultraviolet function.
6. Color optional: white, warm white, red, blue, green, blue, yellow.
7. They have environmental protection and adapt high power COB led as lighting source. There is no heat radiation, no harm to eyes and skin.

GOULY LED LIMITED

Address: No.10 Xinyuan Road, Pucheng'ao, Pinghu, Longgang District, Shenzhen China 518111

Tel: +86-755-28058067

E-mail: Info@gouly-led.com

8. Humanized design: It's simple and easy for the lighting installation and maintenance.
The installation angle is from 45 degree to 75degree.

Application Drawing



★ Technique Parameter:

letm	FL10W	FL20W	FL30W	FL50W	FL60W	FL150W	FL200W
Light source (W)	1pcs COB 10W	1pcs COB 20W	1pcs COB 30W	1pcs COB 50W	1pcs COB 60W	1pcs COB 150W	1pcs COB 200W
size (mm)	L1xW1xH1				H1xW1xH1		
	115X85X90	180X140X10	225X185X126	284X232X155	284*232*155	425*325*200	600*285*215
color	PW/WW/ RGB						
lumen (LM) (white)	900LM	1800LM	2700LM	4800LM	5400LM	13500LM	18000LM
Beam angle	100°						
Light distance	35m						
Input Voltage	DC12/24V AC85-265V						
IP Pank	IP65						

GOULY LED LIMITED

Address: No.10 Xinyuan Road, Pucheng'ao, Pinghu, Longgang District, Shenzhen China 518111


Tel: +86-755-28058067

E-mail: Info@gouly-led.com

Working temperature	-20° C~ 40° C						
G.W.	0.6	1.2	2	3.3	3.5	5	6.2


★ Dimension drawing: (Unit : mm)

FL10W

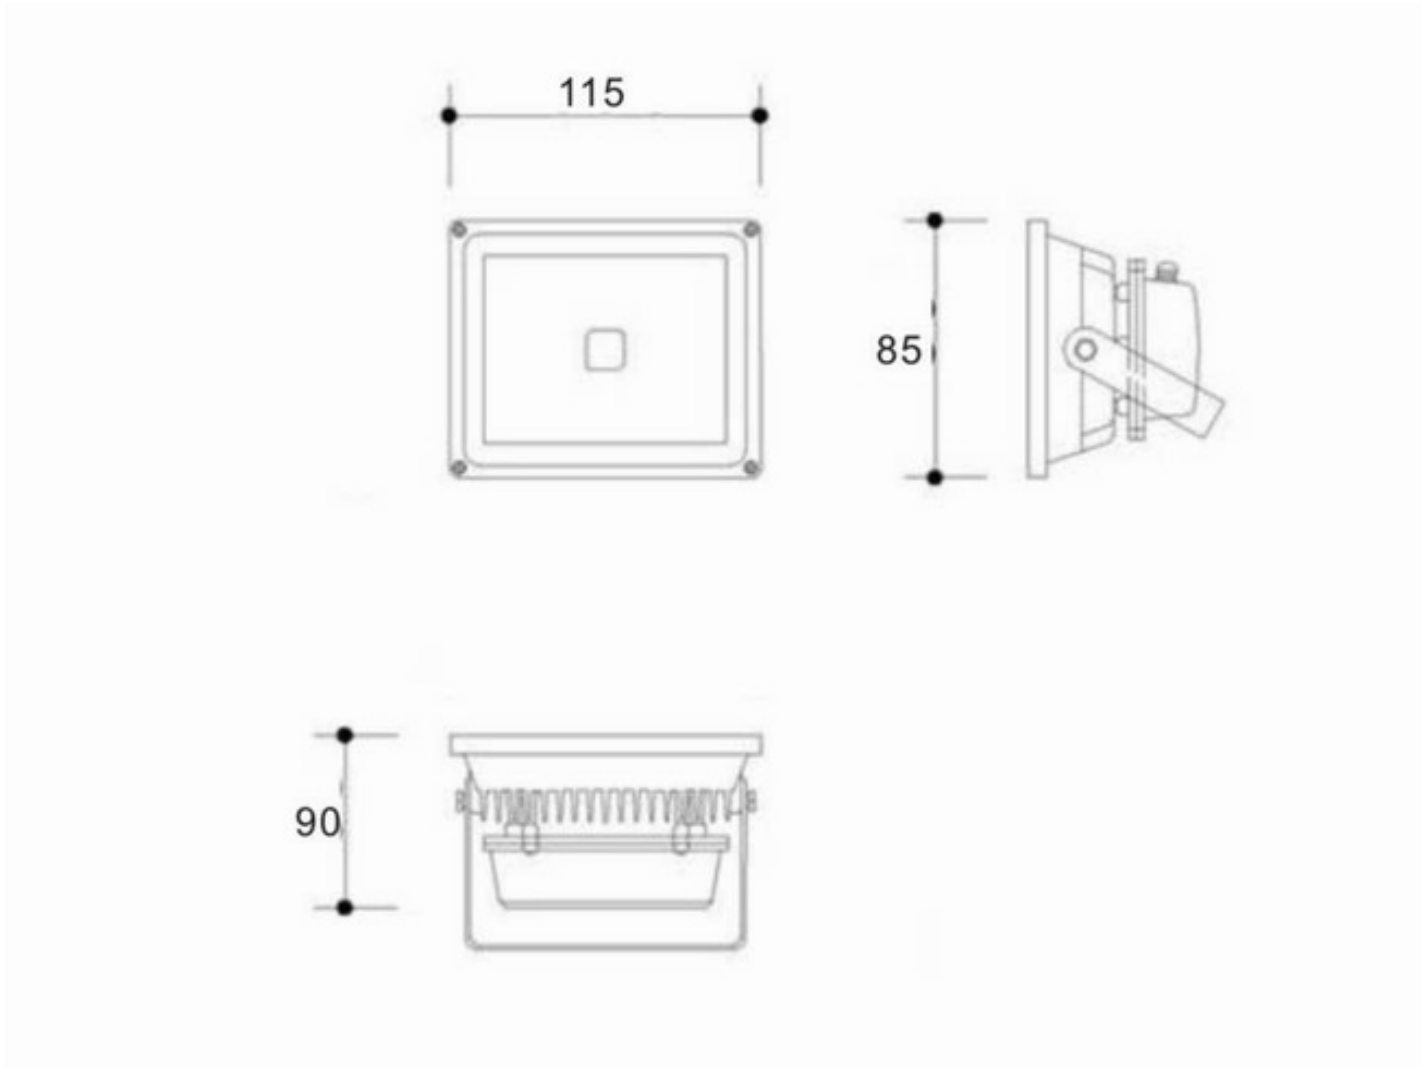


FL30W/ FL40W


GOULY LED LIMITED
 Address: No.10 Xinyuan Road, Pucheng'ao, Pinghu, Longgang District, Shenzhen China 518111
 Tel: +86-755-28058067 E-mail: Info@gouly-led.com

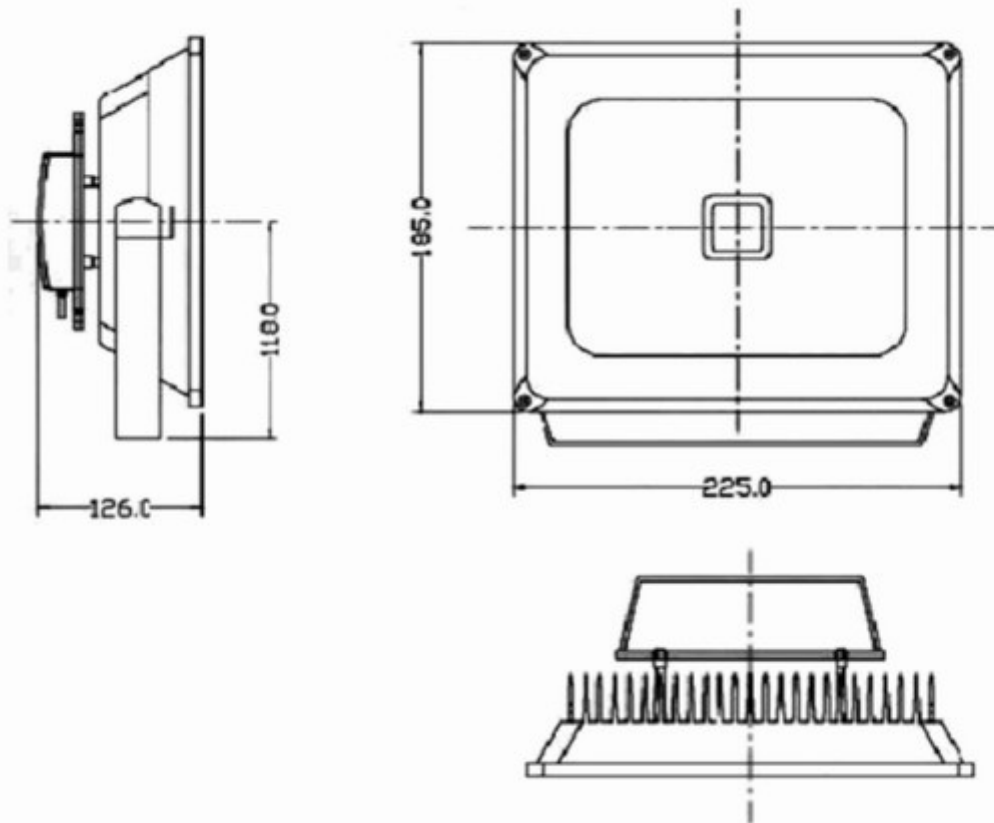

FL50W/FL60W

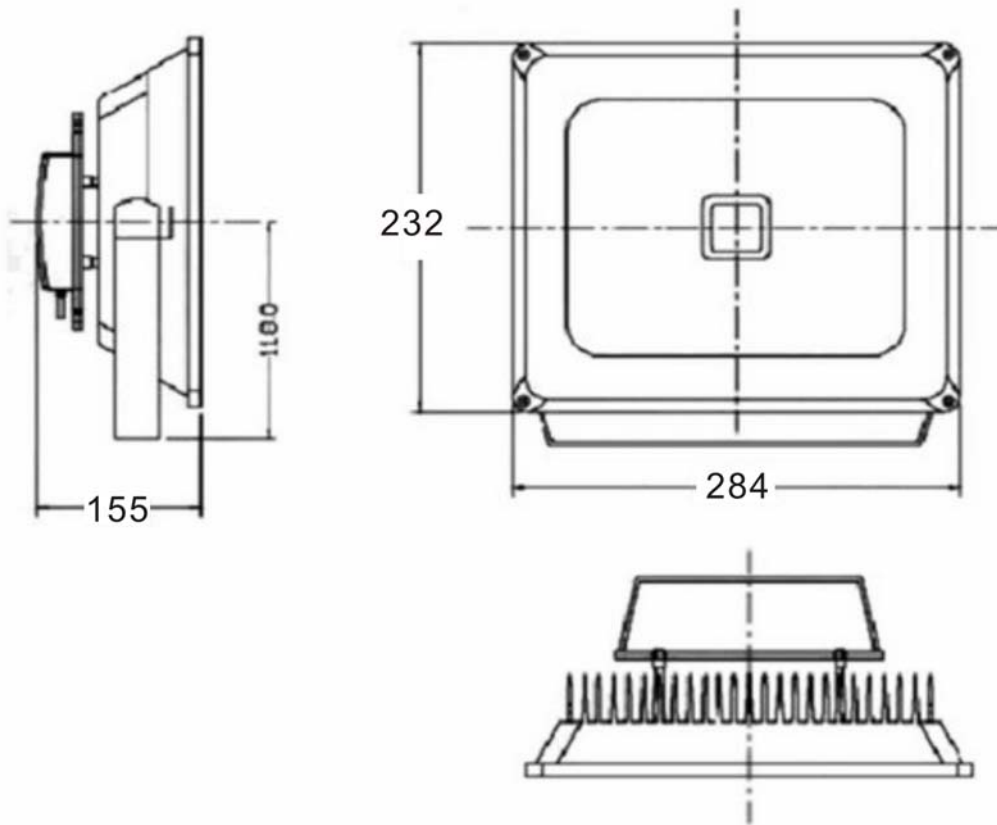

★ Packing method :

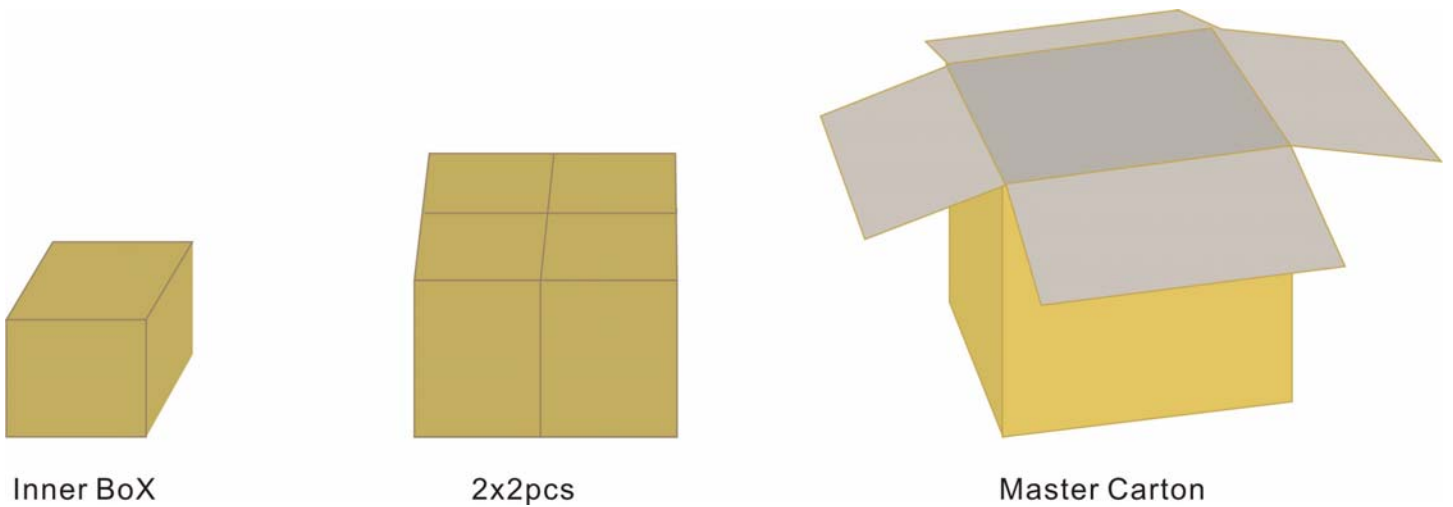

GOULY LED LIMITED

Address: No.10 Xinyuan Road, Pucheng'ao, Pinghu, Longgang District, Shenzhen China 518111

Tel: +86-755-28058067 E-mail: Info@gouly-led.com

Note:

- 1 Before installing or removing lamps must be off ;
- (2) If the lamp body is damaged, replace with a new one ;

Common Faults and exclusion method

- 1 If the lamp is not lit , check the power is turned on , the switch is in the on position ;
- (2) If the lamp when the light is off , check the power if there is bad or loosening ;

Note: If the above methods do not allow lighting to work, not to dismantle fixtures, lamps , please contact a professional service personnel .

GOULY LED LIMITED

Address: No.10 Xinyuan Road, Pucheng'ao, Pinghu, Longgang District, Shenzhen China 518111

Tel: +86-755-28058067 E-mail: Info@gouly-led.com