
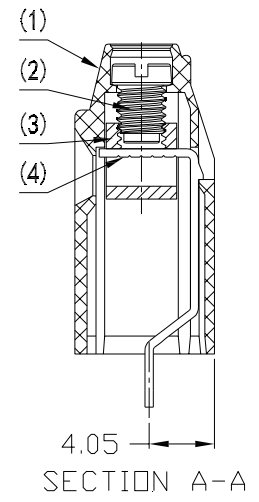
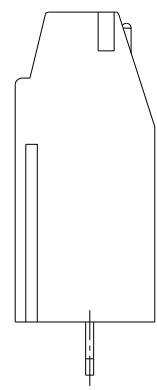
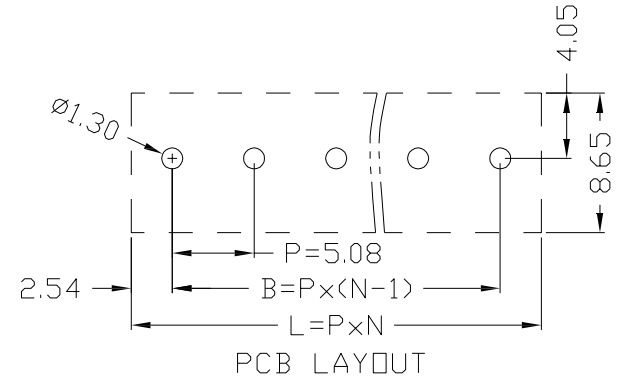
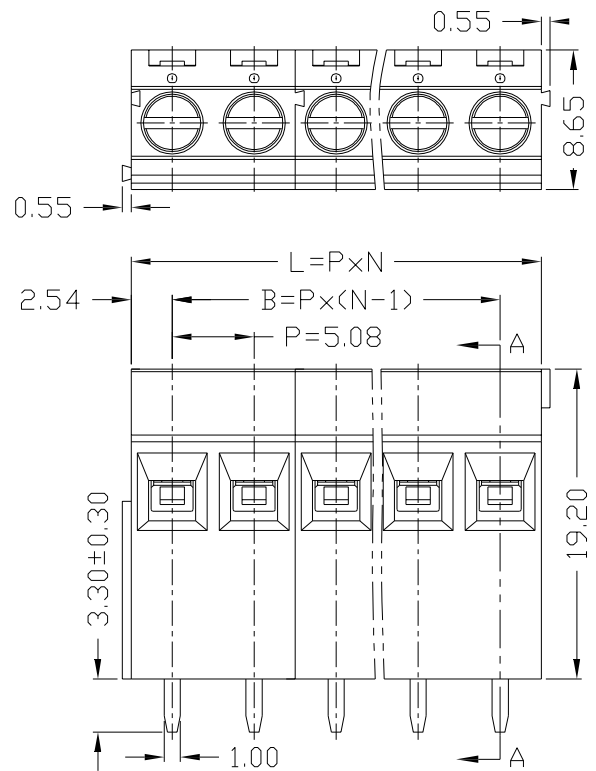


JPCAC-- E XX X --X Z A

2-24P

5 5.0mm
E 5.08mm

5 Green 2 3.80mm
6 Blue 3 3.50mm
A Black 4 3.00mm
1 "-"Screw 5 2.90mm
2 "+"Screw 6 4.00mm
Z 3.30mm

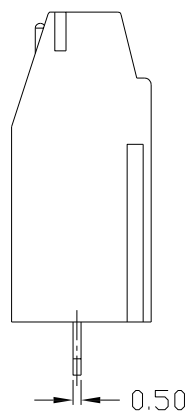

P=5.08mm,N为孔位数(N for hole digits),有效位数为(Significant Digits): 02P~XXP												
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	...
L	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	121.92	
B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	

RoHS COMPLIANT

Unit : mm

GENERAL TOLERANCES: (UNLESS SPECIFIED)

0 = ±.50
0.0 = ±.25
0.00 = ±.15
0.000 = ±.05
0 = ± 2°
0.0 = ± 1°

PROJECTION

D.R. 16/08/2024

CH.K 16/08/2024

APV.D 16/08/2024

JPC connectivity

5.08mm 端子台

SCALE 1:1
SIZE A4
PART NO. JPCACE0215ZA

PD./FILE NO.

-

REV. A1
SHEET 1 OF 2

1、技术参数 (Technical Data)

中 心 距 (Center Space) : 5.08mm

压线范围 (Wire Range): 26~14AWG 1.5mm².

剥线长度 (String Length) :6mm

额定螺钉扭矩 (Rated Screw Torque) : 4.4 lbf•in(0.5N.m)

额定电气参数 (Rated Electrical Parameters) : UL 300V/12A IEC 250V/15A

工频耐压 (Frequency Voltage) : AC2000V, 1分钟无异常 (No one minute abnormal)

脉冲耐压 (Rated Surge Voltage):4000V, 正负极各5次无异常 (All five are negative, No abnormal)

绝缘阻抗 (Insulation Resistance) : DC500V, 500MΩ 以上 (DC500V, 500MΩ above)

接触电阻 (Contact Resistance) : ≤20mΩ

2、工作环境 (Operation Environment)

工作温度 (Temperature) : -40℃~+105℃

海拔 (Altitude) : 2000m以下 80Kpa~106KPa

相对湿度 (Relative Humidity) : 5%~95%

污染等级 (Contamination Class) : III

ROHS COMPLIANT		Unit : mm	PROJECTION 	JPC connectivity			
		GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 = ±.50 0.0 = ±.25 0.00 = ±.15 0.000 = ±.05 0' = ± 2' 0.0' = ± 1'	D.R. 16/08/2024	TITLE 5.08mm 端子台		PD./FILE NO. -	
			CH.K 16/08/2024				
			APV.D 16/08/2024	SCALE 1:1	SIZE A4	PART NO. JPCACE0215ZA	REV. A1
							SHEET 2 OF 2