
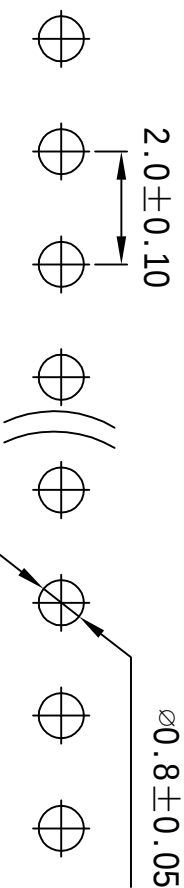
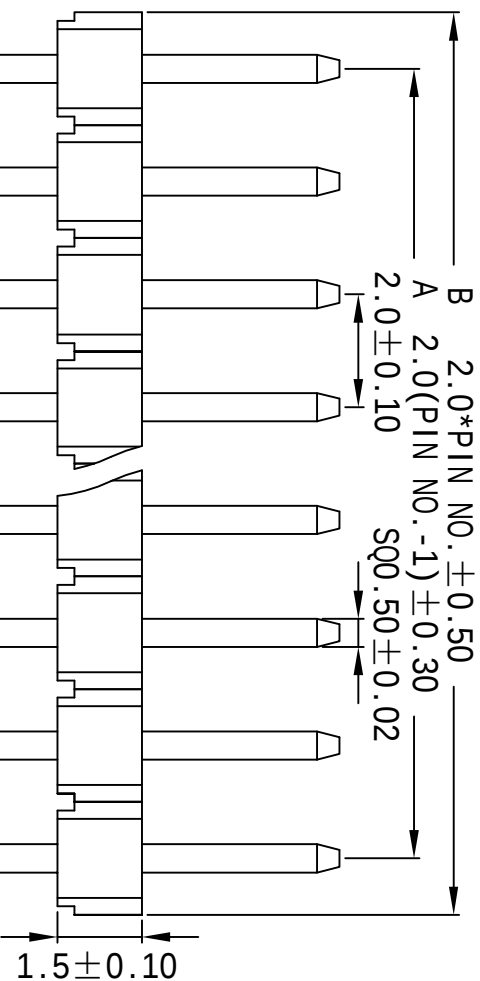


東莞市格捷電子有限公司


Dong Guan City Gejie ELECTRONICS CO.,LTD

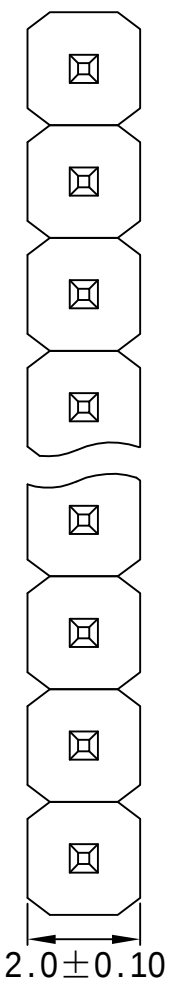

P.C.B LAYOUT

SPECIFICATION

Current Rating : 2Amp
 Insulator Resistance : 1000 MΩ min.
 Contact Resistance : 20 mΩ Max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C to +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : PA9T+30%G.F
 Contact Plated : Gold Flash All Over Nickel

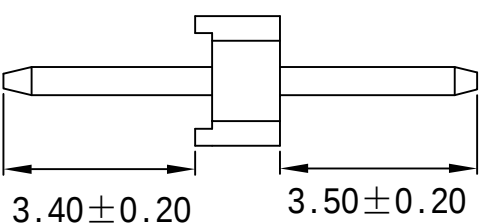

PIN NO.	DIMENSION	
	A	B
1	2.0	4.0
2	4.0	6.0
3	6.0	8.0
4	8.0	10.0
5	10.0	12.0
6	12.0	14.0
7	14.0	16.0
8	16.0	18.0
9	18.0	20.0
10	20.0	22.0

C		DRAWN	Brin	General Tolerance:	
A		CHECKED	Yue	.X = ±0.30 .XX = ±0.20 .XXX = ±0.10	.X° = ±5° .XX° = ±3°
A		APPROVAL	B.T	UNIT	mm
REV	DATE	Content	BY	DATE	PROJECTION:
				2015-8.14	

東莞市格捷電子有限公司
 Dong Guan City Gejie ELECTRONICS CO.,LTD

TITLE: PH2.0*1.5 1*XP SQ8.4/
 3.40 S/T 磷銅 PA9T環保