

1920-2170 MHz H-POL or V-POL
Model:DB2000-16-16C
Electrical Data




Frequency:	1920-2170 MHz
Gain:	16 dBi
VSWR:	<1.5:1
Polarization:	Horizontal Or Vertical
Horizontal Beamwidth :	27°
Vertical Beamwidth:	23°
Nominal Impedance:	50 Ohms
F/B Ratio:	>16 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data

Connector :	N Female
Dimension:	730mm/28.7in
Weight:	0.5kg/1.1lb
Cable Length:	240mm/9.45in
Mounting Method:	Mast
Mast Size:	Ø40-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65℃

Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	750*460*280mm
(length*width*height)	29.5*18.1*11.0in
Packing Weight:	11.5kg/25.3lb

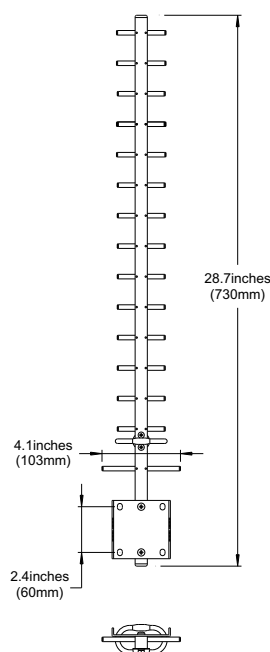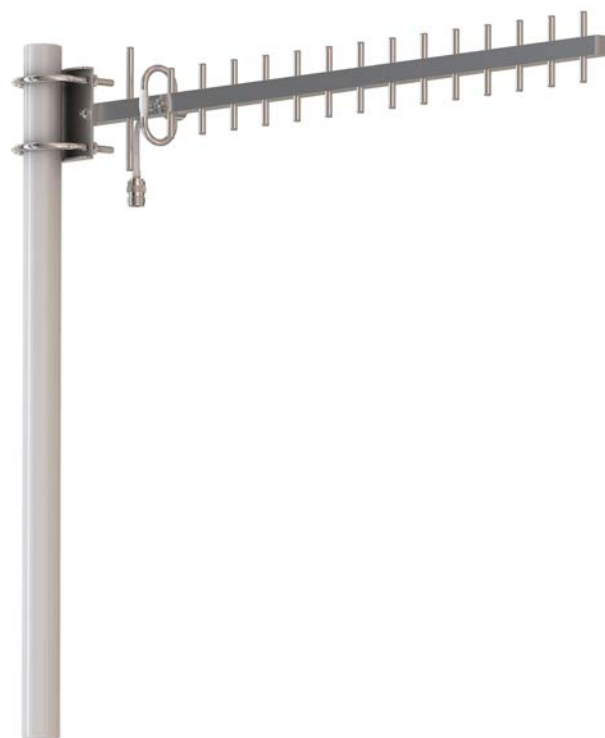

Installation Guide

Model:DB2000-16-16C

