



惠州宏利源电器有限公司
HONYONE ELECTRICAL APPLIANCE CO.,LTD

PA12

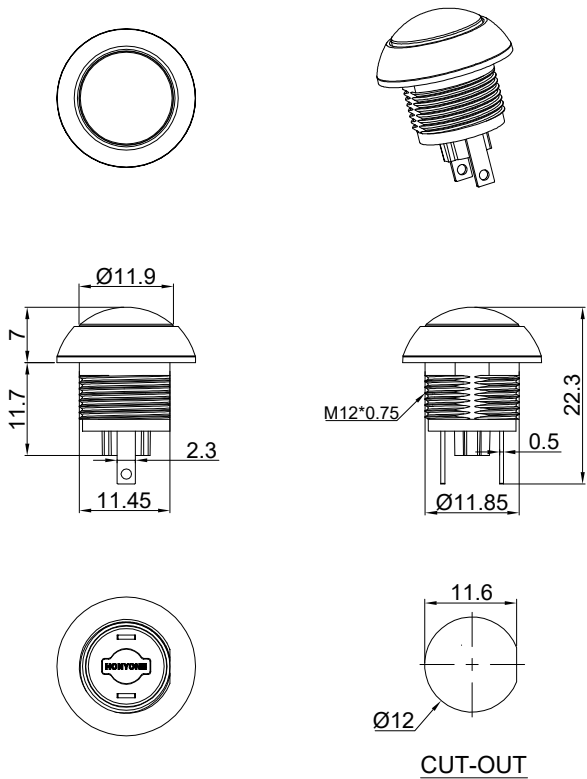


ELECTRICAL RATING:
Resistive: 28VDC 5A 4A(DB) 25,000cycles
Resistive: 115VAC 1A 1A(DB) 25,000cycles
Inductive: 28VDC 2A 2A(DB) 25,000cycles
Contact Resistance: 50mΩ Max.
Insulation Resistance: 1GΩ @ 500DVC
Dielectric Strength:AC 1000V 1 minute
Mechanical Life:1,000,000cycles
Operating Temperature:-40°C~+85°C
Switch action: Momentary
Switch circuitry: SPDT-DB ,load 1N.O./1N.C. 2 Circuit Life
Actuator Ingress Protection: IP67,IP68S,and IP69K (Front Panel).
Total travel: 1.6mm max.
Operating Force :1.7lbs [770g]. Release Force :12oz [340g]
Standards: UL61058 ROHS

MATERIAL:
Base:PA66;
Cap: ABS;
Terminal: Brass,Gold plated;
Nut:Brass,Ni plated;



Parts List	
1	NUT
2	GASKET



Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
G	Green 绿色
B	Black 黑色
CAP COLOR(X)	

公差 TOLERANCES				.X± 0.5 .XX± 0.3		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
版本 VERSION				A0	比例尺 SCALE	NONE	日期 DATE	2021.12.20	品名 TITLE
A0	新发行	2021.12.20	N/A	核准	Richard	核对	绘图	Mashaofei	PA12-11C-DBX-NN-1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	Richard	CHECKED BY	Sinc	DRAWN BY	PA12-11C-DBX-NN-1_CP_A0