

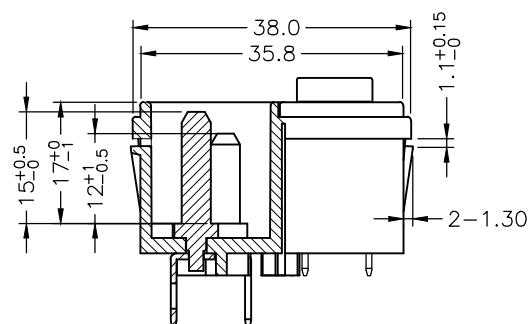
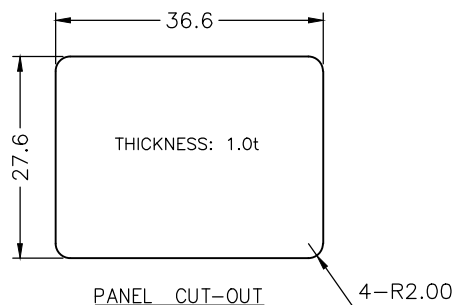


A: MATERIAL:
1.HOUSING:PC, UL 94V-0
2.TERMINAL: COPPER ALLOY, TIN PLATED

B: CHARACTERISTICS:
1.RATING: 10A 250V~
2.INSULATION RESISTANCE : 100MΩ MIN, AT 500V DC
3.ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE

C: APPROVALS:
UL, CUL, ENEC & CCC

D: EQUIVALENT CIRCUIT

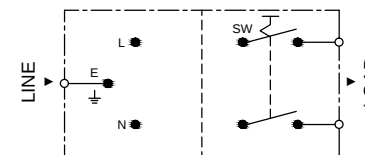

E: NOTE

SOCKET'S TERMINAL	SWITCH'S TERMINAL

E				TOLERANCE UNLESS OTHERWISE MARKED				MATERIAL		SPEC.	
D				DIMENSION:				SEE ABOVE		IEC 60320-1 C14	
C				.000: ±0.1				APPROVED	CHECKED	DESIGNER	NOTE:
B				.00: ±0.2 .0: ±0.3							
A	2019.07.24	RELEASE	NEW REVISION	A		UNIT	SCALE	SHEET	研发部 研发部 2019.07.24 2019.07.24		DOC.#:
REV	DATE	DOCUMENT	DESCRIPTION	4		mm	1 : 1	1 of 1			S711-00XX