


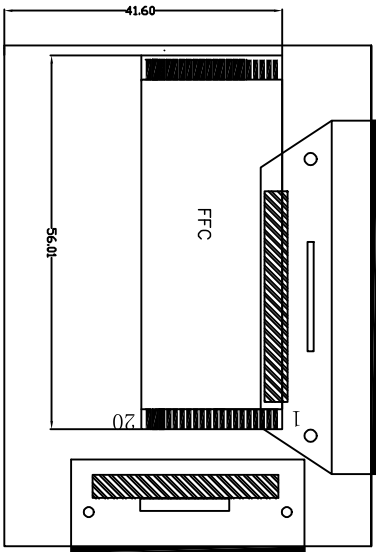
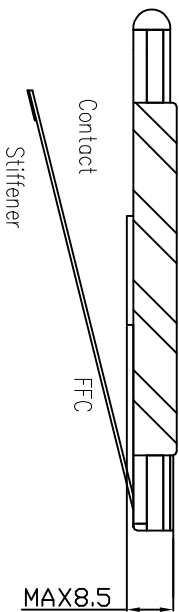


Customer approval :

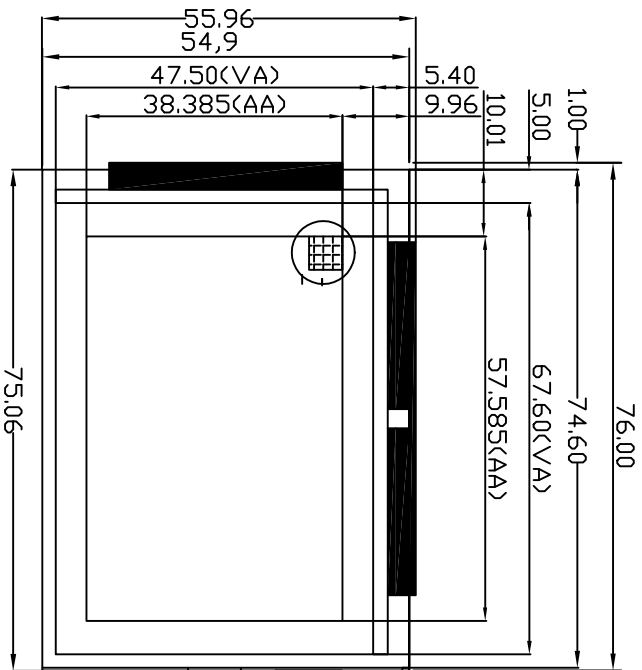

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTOR/RST	/RD	/WR	/CS	AO	DB0	DB1	DB2	DB3	DB4	
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTOR	DB5	DB6	DB7	VDD	VSS	VOU	VO	NC	BLA	BLK

- SPECIFICATION:
- 1). Driving: Dots:240*160, DUTY:1/160, BIAS:1/1/3, VDD:5.0V, VO:19.8V, VOUT:25.1V
 - 2). Viewing angle: 6 0'CLOCK
 - 3). Display mode: FSTN/Positive/Transflective
 - 4). Operating temp: -20'C~+70'C
 - 5). Storage temp: -30'C~+80'C
 - 6). Controller IC: RA835AP3N
 - 7). Backlight: White LEDX4, 70MA, 5.0V
 - 8). Dimensions with mark "()" are important, with mark "*" are referenced
 - 9). All the raw materials are RoHS compliant

REVISION RECORD		REV	TCC® 深圳市三元晶科技有限公司 ShenZhen TCC LCD Hi-Tech Co., Ltd.						
First issue		AO							
		DRAWING NO.	SVT240160EV31-5C1K316R8-B9WZ1-6		GENERAL TOL:		± 0.3		
		APPROVED BY	CHECKED BY	DRAWN BY	UNIT:	mm	PAGE		
		LSS	LGJ	LAN	2016/12		1/1		