


UL1028

RoHS & REACH compliant

BORT cable

环保引领未来

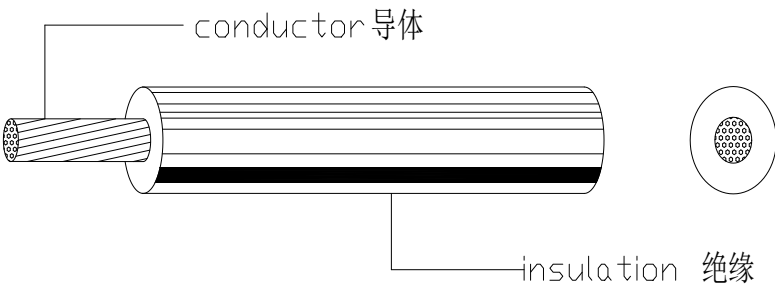

PRODUCT DESCRIPTION

- ★Voltage Rating: 600V
- ★Test Voltage: 2000V
- ★Temperature: 105°C
- ★Flame Test: Pass UL VW-1 & CSA FT1 vertical flammability
- ★For general purpose internal wiring of electronic and electrical equipment ,Max temperature 60°C /80°C
- ★The oil resistance type cable is available
- ★Application standard : UL758, UL1581 & CSA C22.2 NO.210.2
- ★Insulation: PVC
- ★Color: Any
- ★Characteristic: Uniform thickness of wire to ensure easy stripping and cutting. Oil-resistance, Resistance to acid and alkali, moistureproof, mould proof, environmental etc

产品结构 CABLE CONSTRUCTION

导体 CONDUCTOR			绝缘 INSULATION		最大导体电阻 MAX.COND. RESISTANCE (Ω/km,20℃,DC)	耐压强度 DIELECTRIC STRENGTH (VAC, 1min)
规格 AWG	构造 CONSTRUCTION (No./mm)	外径 DIA. (mm)	厚度 THICKNESS (mm)	外径 O.D. (mm)		
30	7/0.10	0.30	0.80	1.90	381	2,000
28	1/0.32	0.32	0.79	1.90	227	2,000
	7/0.127	0.38	0.81	2.00	239	
	7/0.127OS-1*	0.38	0.81	2.00	239	
26	1/0.404	0.40	0.80	2.00	143	2,000
	7/0.16	0.48	0.81	2.10	150	
	7/0.16 OS-1*	0.48	0.81	2.10	150	
24	1/0.511	0.51	0.80	2.10	89.3	2,000
	11/0.16	0.61	0.82	2.25	94.2	
	7/0.20OS-1*	0.60	0.83	2.25	94.2	
22	1/0.643	0.64	0.80	2.25	56.4	2,000
	17/0.16	0.76	0.82	2.40	59.4	
	7/0.254 OS-1*	0.76	0.82	2.40	59.4	
20	1/0.813	0.81	0.80	2.40	35.2	2,000
	26/0.16	0.94	0.81	2.55	36.7	
	7/0.32OS-1*	0.96	0.80	2.55	36.7	
	1/1.024	1.02	0.82	2.65	22.2	

18	1/1.024 41/0.16 7/0.404OS-1*	1.02 1.18 1.20	0.82 0.81 0.80	2.93 2.80 2.80	22.2 23.2 23.2	2,000
16	1/1.29 26/0.254	1.29 1.49	0.81 0.81	2.90 3.10	14.0 14.6	2,000
14	1/1.60 41/0.254	1.60 1.88	0.80 0.81	3.20 3.50	8.78 8.96	2,000
12	65/0.254	2.36	0.82	4.00	5.64	2,000
10	7/15/0.254	3.42	0.82	5.05	3.54	2,000