


R SERIES

DOUBLE POLE ROCKER SWITCHES UP TO 20A 125VAC
 illuminated or non-lighted, splash-proof cover



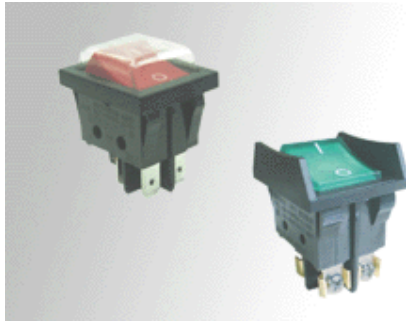


Snap-in Panel Cutout
 X=Panel Thickness

X	Dim.Y	Dim.Z
0.75 to 1.25 mm	30.0 + 0.1 / - 0	22.0 + 0.1 / - 0
1.25 to 2 mm	30.2 + 0.1 / - 0	22.0 + 0.1 / - 0
2 to 3 mm	30.5 + 0.1 / - 0	22.0 + 0.1 / - 0




- 16A 125/250VAC 1/4HP (UL, CSA NRTL/C)
- 16A 125/250VAC, 65 °C (UL/CUL)-on-off-on
- 20A 125VAC, 3/4HP 250VAC (UL)
- 20A 125VAC /16A 250VAC, 3/4HP 125/250VAC T105 (UL/CUL)
- 16(4) 250V~T125 1E4, 10(2)A 250V~5E4 (VDE, SEMKO, DEMKO, NEMKO, FIMKO, SEV, ENEC)
- 16(8)A 250V~T125 (VDE, ENEC)
- 16(4)A 250V~T125 1E4 (CQC)
- 10(2)A 250V~T125 5E4 (CQC)
- Initial contact resistance : 20m ohm max.
- Insulation resistance : 100M ohm min, at 500VDC
- Dielectric strength : 1,000 VAC for 1 minute
- Electrical life : 16(4) A 250VAC : 10,000 cycles
- 10(2) A 250VAC : 50,000 cyclesdegrees in Celsius
- Temperature range : -20 to + 125 degrees in Celsius
- Switch for Class II appliances
- Base : Nylon 66, UL rated : 94V-2 min
- Actuator : Nylon 66 /PC, UL rated 94V-2 min
- Spring : Piano wire
- Contacts : Silver copper alloy
- Terminals : Silver copper alloy
- Lamp : Neon for AC; Tungsten bulb for DC


How to order




R110-1FCN-BBN-NN, "I O" mark
in-molded

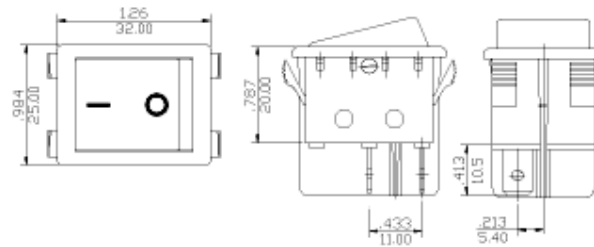


R110-1F2N-BB5-NN, 22x28mm
mounting

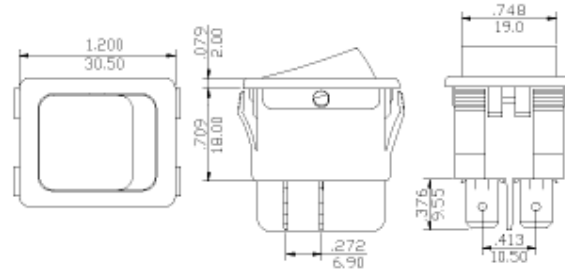


R210-112L-BB1-NN, LED-effect
Len lighted

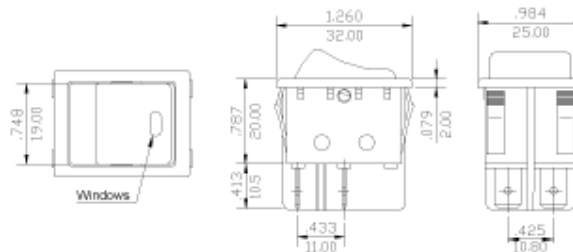


R237-1C6N-BB4-NN

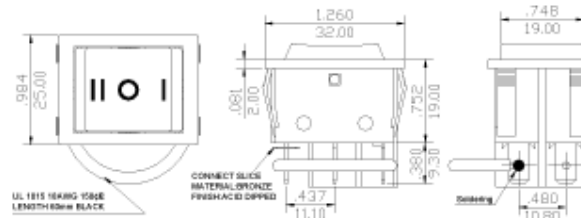

R270-0C2N-BB7-N

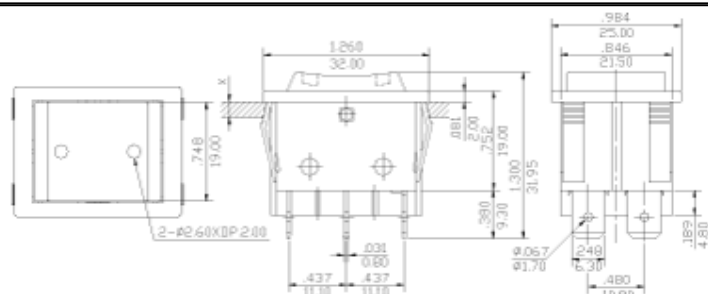

R210-5C2L-BBR-NC

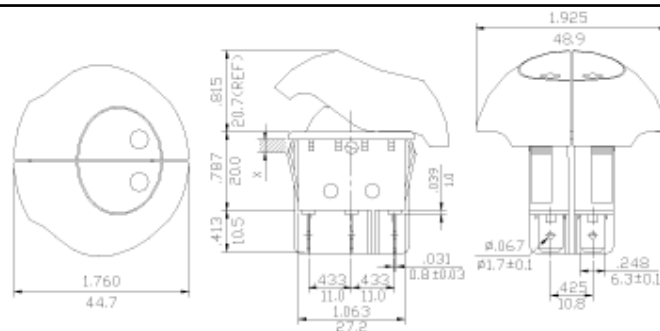




Optional protection guard




Optional splash shield
*Anti-UV Cover upon request


R-1 STANDARD

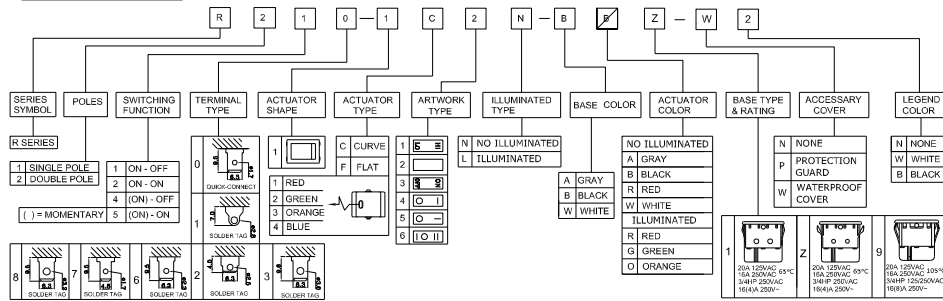


R-2 TWIN ACTUATOR TYPE

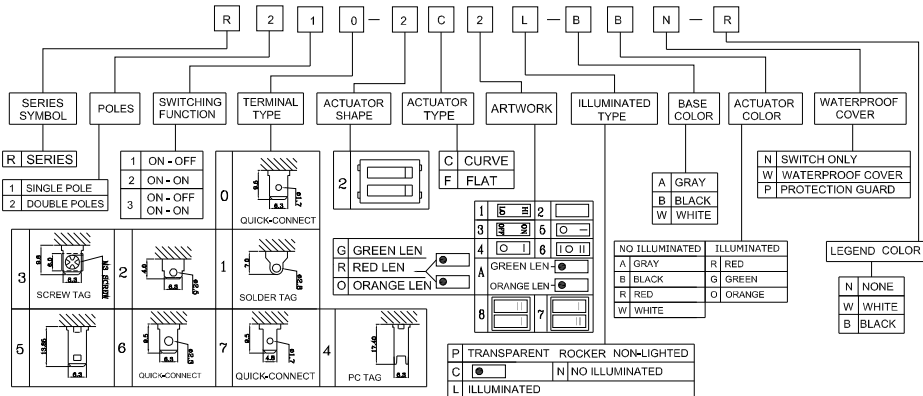

R-3 3 POSITIONS TYPE

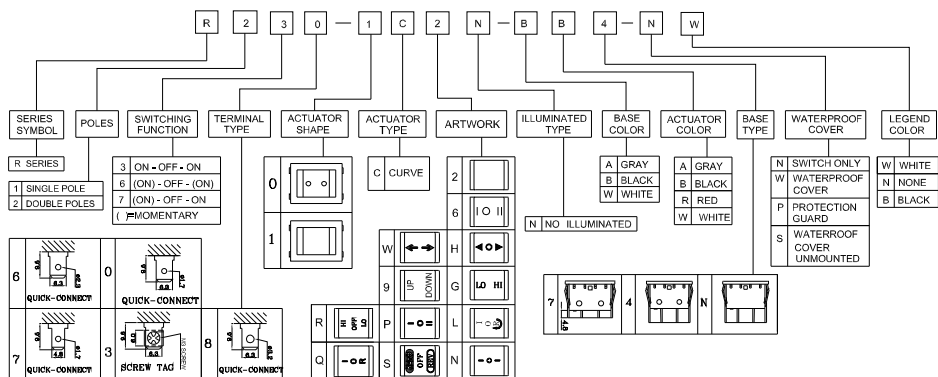

R-4 22*28 TYPE

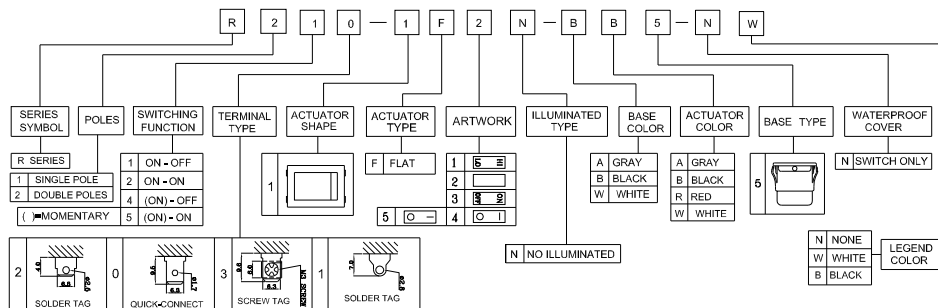

R-5 ROUND ACTUATOR TYPE

