
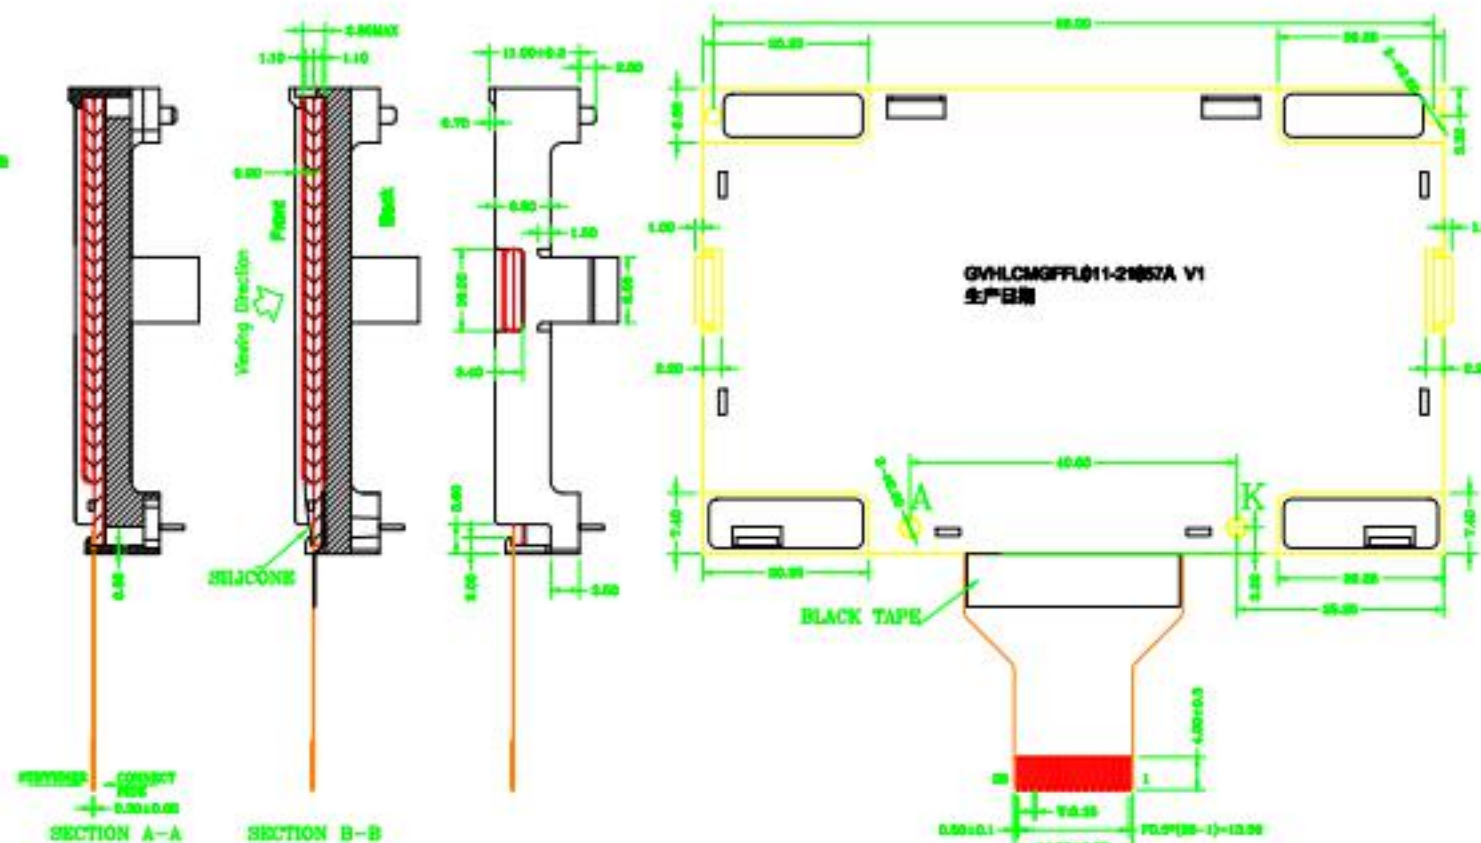


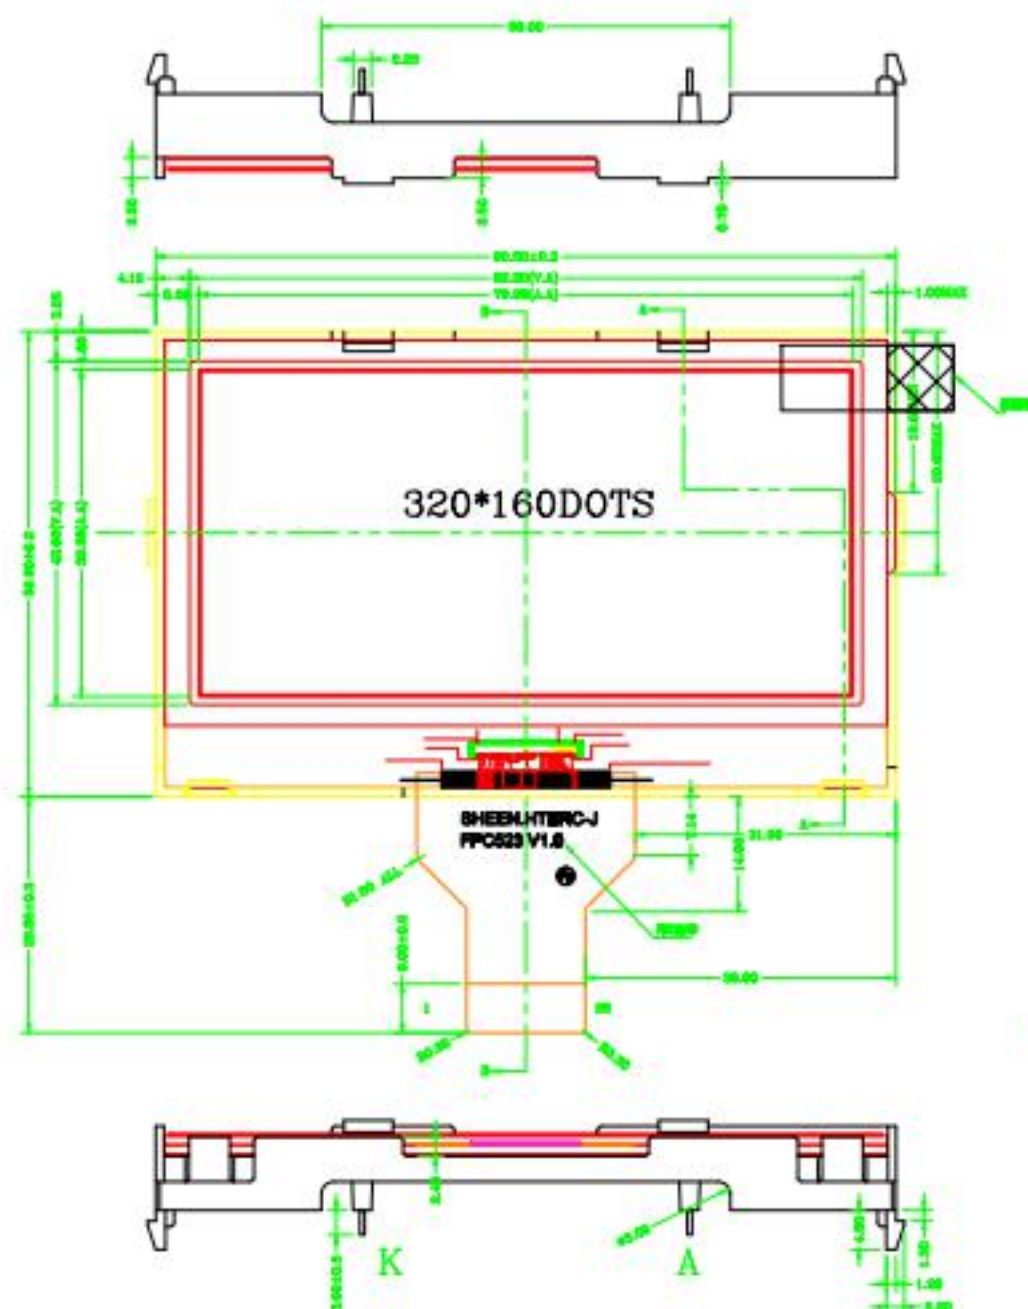


PIN	SYMBOL
1	VLCD
2	VS+
3	VS-
4	VB0-
5	VB1-
6	VB1+
7	VB0+
8	VDD
9	VDD
10	VSS
11	VSS
12	NC
13	BM1
14	BM0
15	CS0
16	CD
17	WR1
18	WR0
19	RST
20	D0
21	D1
22	D2
23	D3
24	D4
25	D5
26	D6
27	D7
28	VSS

NOTE:


1. GENERAL TOLERANCE: $\pm 0.2\text{mm}$
2. THE PART OF * ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	FSTN	BACKLIGHT COLOR	WHITE
POLARIZER TYPE	TRANSFLECTIVE	FRAME TYPE	—
DISPLAY TYPE	POSITIVE	DATA TRANSFER	8080/6800 Parallel
LCD COLOR	—	CONNECTOR TYPE	FPC
VIEWING ANGLE	8:00	TECHNOLOGY	COG
OPERATING TEMP	$-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$	DC-DC IC	BUILT IN
STORAGE TEMP	$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$	LCD DUTY	1/160
BACKLIGHT TYPE	—	LCD BIAS	1/12
CONTROLLER IC	UC1698U		ROHS
REMARKS	VDD=3.0V, Vlcd=16.5V(typ) Vled=3.2 $\pm$ 0.2 V@ IF=60mA		

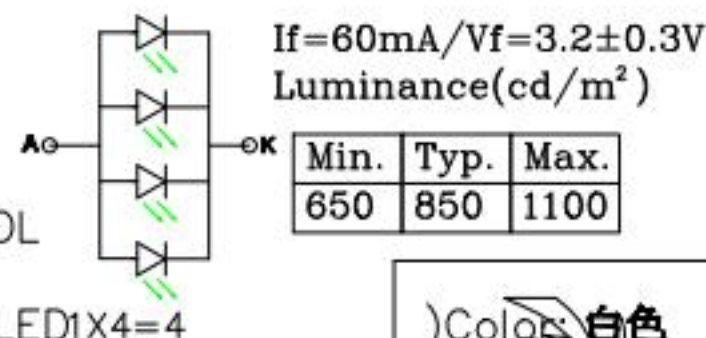

LED1X4=4

SCALE 10:1

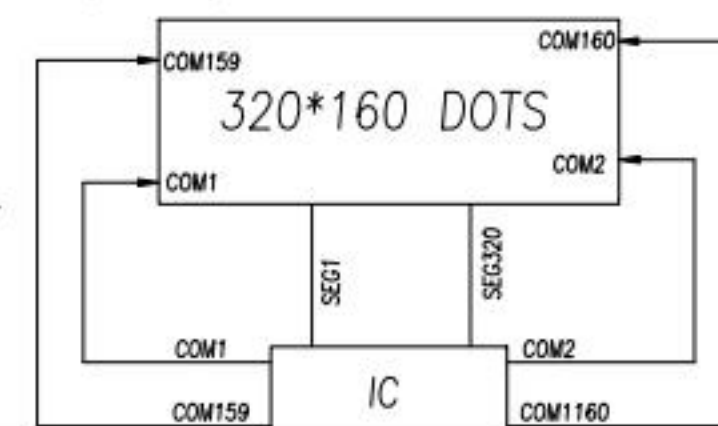

安徽金视界光电科技有限公司

GOLDEN-VISION CORPORATION SPECIFICATION.

TEL: (0559) 7528035

FAX: (0559) 7528266

PRODUCT NO.	GVHLCMGFFL011-21657A(LCM)				
CUSTOMER NO.					
DRAWN BY	CQ 2015.11.25	SCALE	1:1	REV.	V02
CHECKED BY		PAGE	1/1		
APPROVED BY	Frank 2015.11.25	UNIT	mm		