

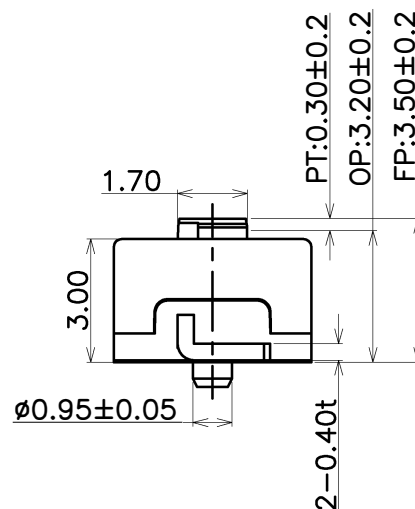
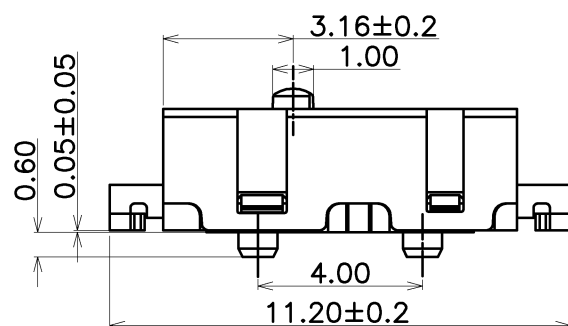
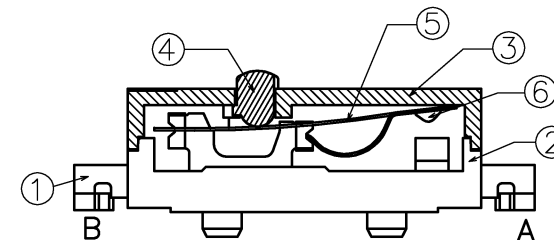
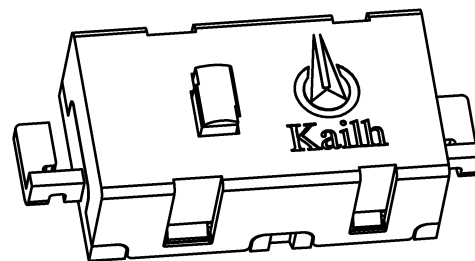
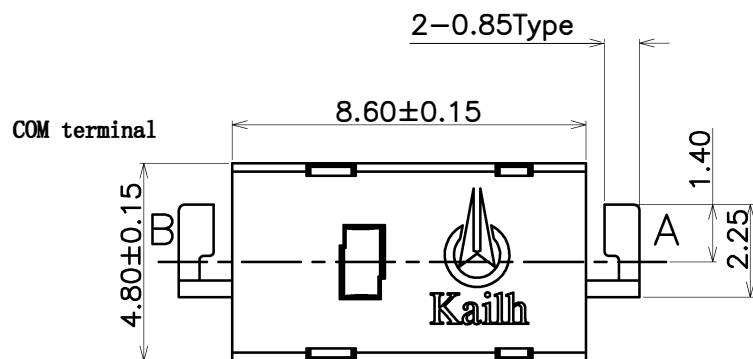


ABIDE BY ROHS



■ Specification :

- 1. Rating: DC30V 0.1A
- 2. Contact Resistance: 100mΩ Max
- 3. Insulation Resistance: 100MΩ Min(DC250V)
- 4. Withstand Voltage: AC500V(50-60Hz)for 1 minute
- 5. Operation Force: 80±10gf
- 6. Releasing Force: 15gf Min.
- 7. Operating Position: 3.20±0.2mm
- 8. Mechanical Life: 3,000,000 Cycles Min.
- 9. Over travel: 0.10mm Min.
- 10. Movement Differential: 0.12mm Max.

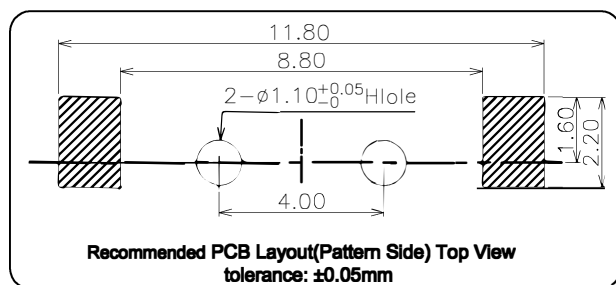

⑥	Contact	—	1	Silver Alloy	Natural	—
⑤	Shrapnel	—	1	Copper Alloy	Natural	—
④	Keystoke	—	1	Nylon	Green	—
③	Cover	—	1	Nylon	Black	—
②	Base	—	1	LCP	Black	—
①	Terminal	A B	1	Copper Alloy	Plating Silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD			
DRAWN	L.Wu		2020.04.14					
CHECKED					TITLE:		MI8731 Micro Switch	
APPROVALS					PART NO.		CMI873101S106	
TOLERANCES ARE			30<L		±0.30		ANGLE	
			10<L		±0.20			
			5<L		±0.15			
			L≤5		±0.10			
			±2°		UNIT: mm		SCALE: 1:1	
					DRAWING NO.		PROJ. 	
							SHEET 1 OF 1	

ECN NO.	A	2020.04.14	NEW	L.Wu		
REV.		DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
4			3			

2

1