


PIN DESCRIPTION

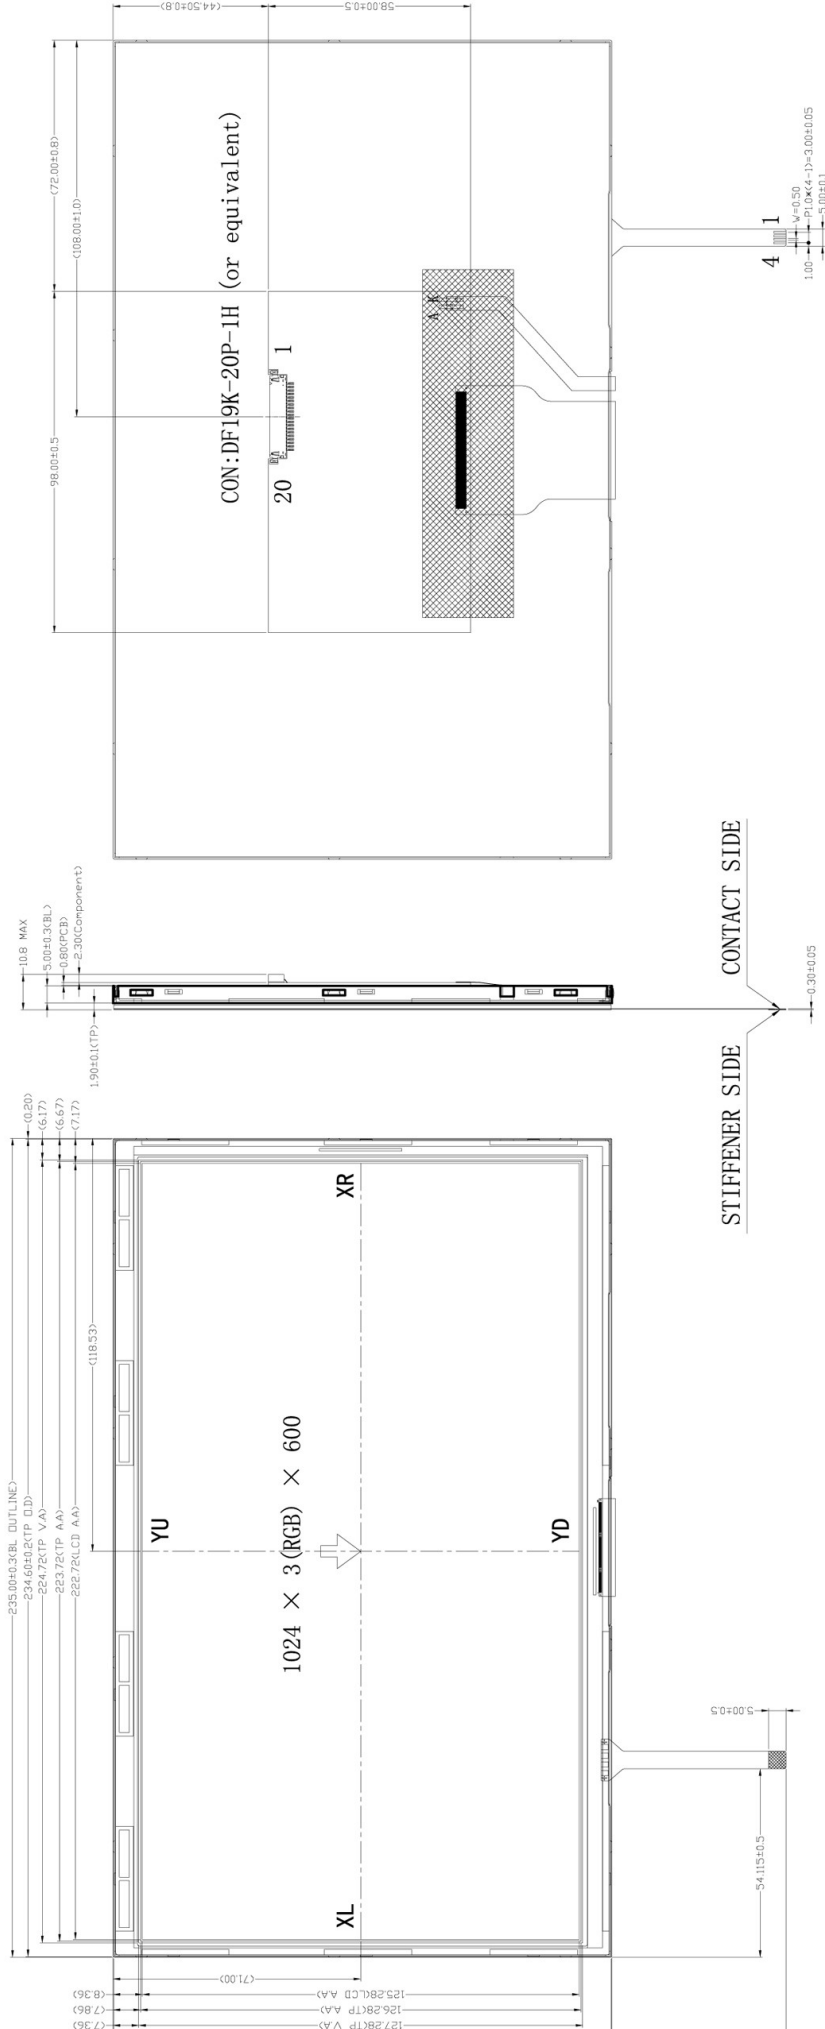

Display Type	TFT
Optimum Viewing Direction	NORMALLY WHITE, TFT
Upper Polarizer Type	12 0° CLOCK
LCD Driver IC	Anti-Glare
Logic Voltage	TBD
Operation Temperature	VDD=3.3V
Storage Temperature	-20°C TO 70°C
Interface	-30°C TO 80°C
Backlight	LVDs interface
Surface luminance	39~LED WHITE 2000cd/m ² 340cd/m ²

39-LED WHITE 260MA/9.6V

Pin ID:	Assignment
1	YU
2	YD
3	XR
4	XL

东莞市精讲光电有限公司



精进光电
JINGJIN

DRAWN		UNIT	Customer NO.
		mm	
CHECKED	SCALE	NO.	Part NO.
	1:1	1/1	JTA10MZXH01P
APPROVED	DATE	VERSION	TITLE
		A	OUTLINE

MAX TOLERANCE: ± 0.2

REFERENCE DIMENSION

RENCE DIMENSION: ()

REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

OUTLINE