





Two-circuit Four-Position Pull-Chain Switches


SUBSECTION	PAGE
A	2

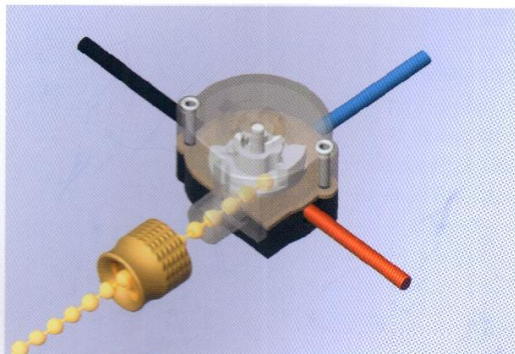


308

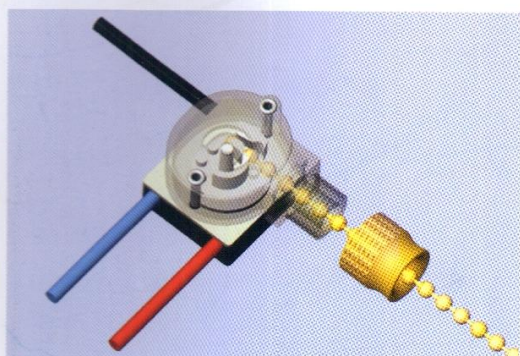

308-B-1

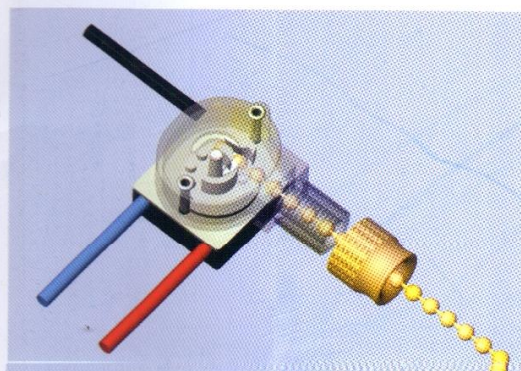

308-B-2

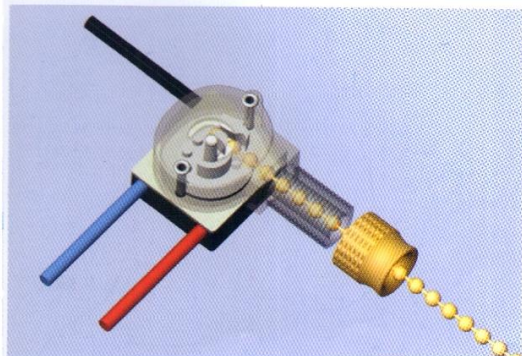

308-B-3

UL File NO.E218558

Cat.No.LS-308 series

Two-Circuit Four-Position


Pull-Chain Canopy Switch

Sequence-Load 1 ON, Load 2 ON, Load 1 & 2 ON, All off

Compact switch design with phenolic black body and molded polycarbonate clear or milled metal nipple. Supplied with 2-1/4" pull chain in brass or nickel plated. Matching brass or nickel bell mouths nuts are bulk packed in each carton.

These switches are useful in lighting utilizing 2-filament lamps, when required achieve low, medium, and high positions. Also used where lighting a secondary lamp is required in conjunction with a primary light source, illuminating lamp 1 on, lamp 2 on, lamp 1 and 2 on, both off.

Standard leads-6" black, red, blue AWM 1015 105°C tinned inners, stripped 5/8". Minimum order quantity - 1,000. Pull cords available, priced and packed separately.

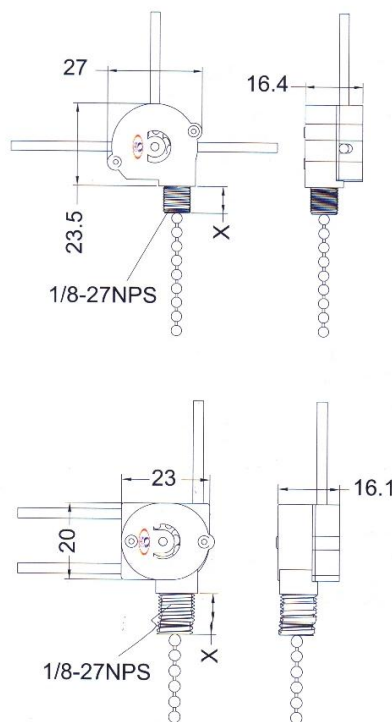

Pull-chain switches with additional ratings available are:

Cat No.	Inventory No.	Nipple Length(x)	Ratings	Certification
308	308-1	9/32" Round		
308-B	308-B-1	9/32" Round	3A250VAC 6A125VAC 6A125VL	
	308-B-2	27/64" Round		
	308-B-3	9/16" Round		

WIN-KARE TECHNOLOGY CO., LTD

Tel: +86-755-25003073; Fax: +86-755-25003079

Mail: marketing@win-kare.com; Web: Http://www.win-kare.com