


SPECIFICATIONS:

Voltage Rating: 600V AC / DC
 Current Rating: 9A AC / DC
 Withstanding Voltage: 1500V AC/minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: $\geq 1000\text{M}\Omega$
 Contact Resistance: $\leq 10\text{m}\Omega$
 After Environmental Testing: $\leq 20\text{m}\Omega$
 *Wates with LDZY C4255 series Wafer

Material: Nylon 66, UL94V-2(0), Natural&Black

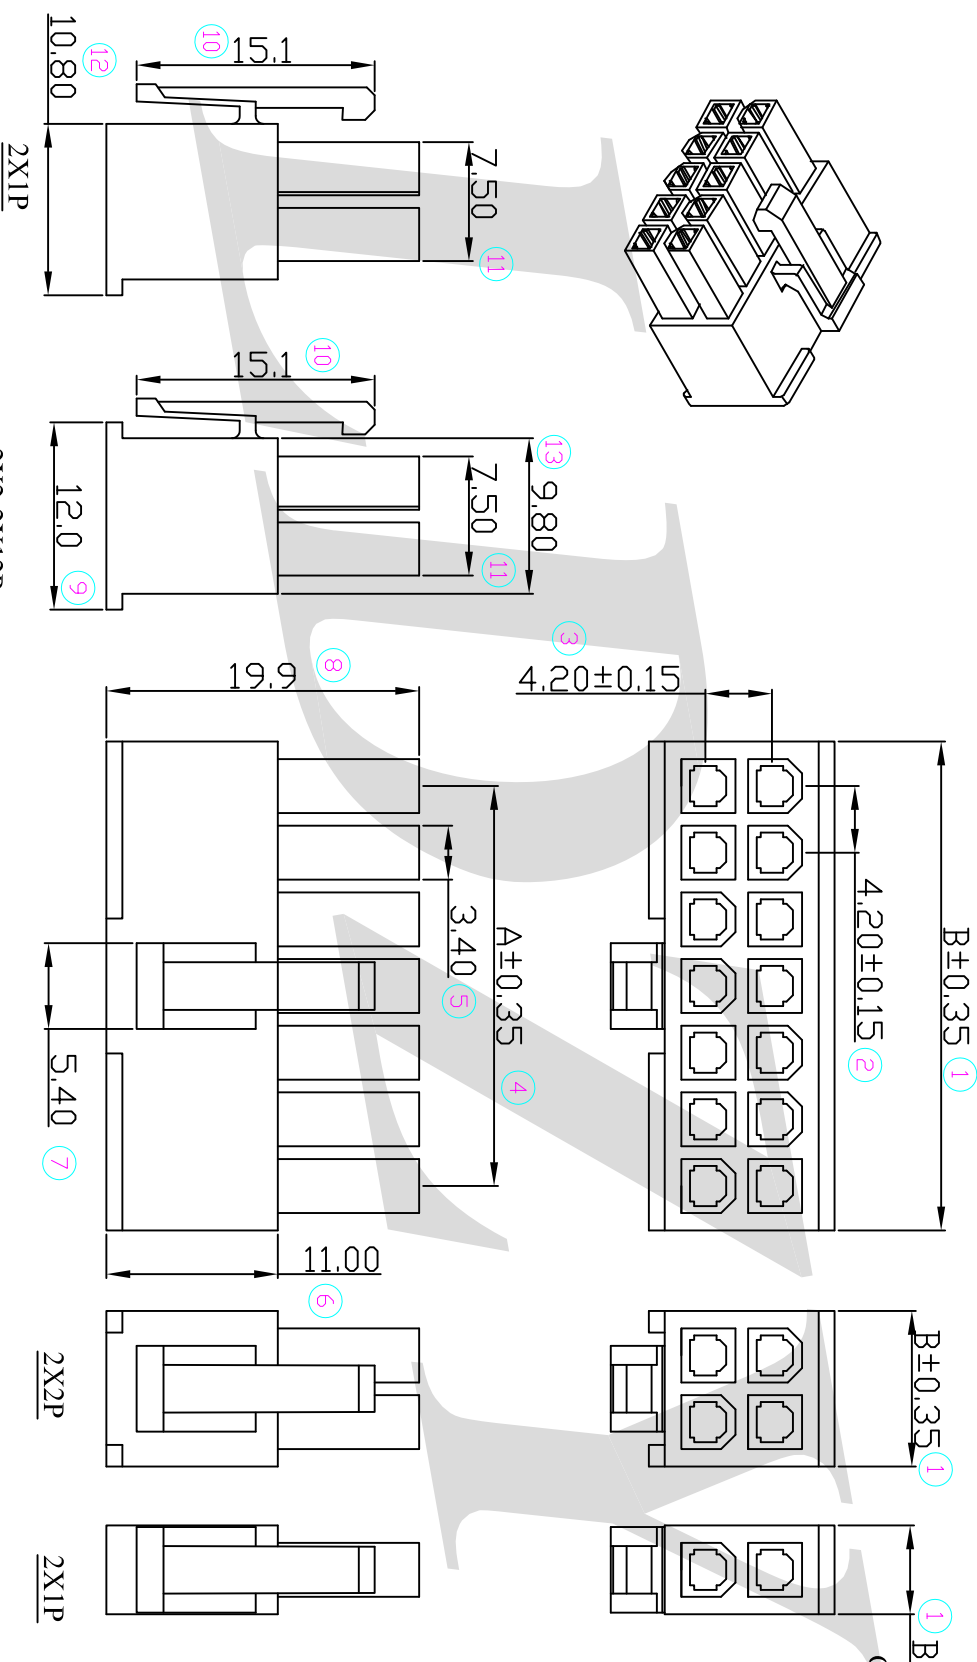

Poles	Dimensions (mm)	
	A	B
2*1P	---	5.70
2*2P	4.20	9.90
2*3P	8.40	13.80
2*4P	12.60	18.00
2*5P	16.80	22.20
2*6P	21.00	26.40
2*7P	25.20	30.60
2*8P	29.40	34.80
2*9P	33.60	39.00
2*10P	37.80	43.20
2*11P	42.00	47.40
2*12P	46.20	51.60

Ordering Information & Dimensions

[illegible]