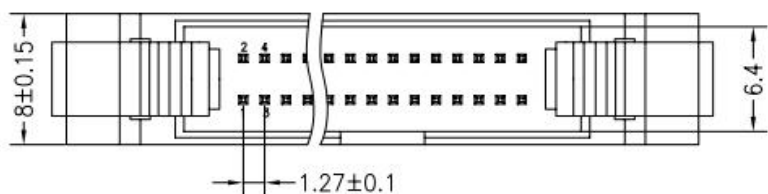
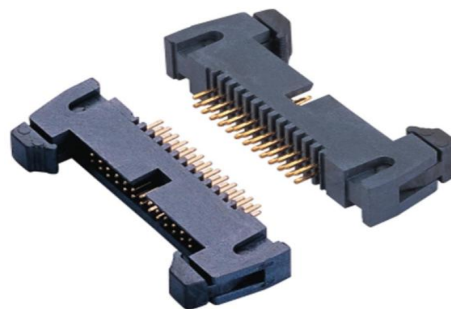
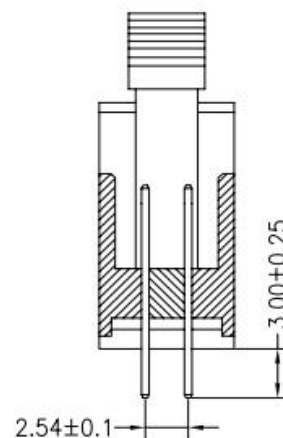
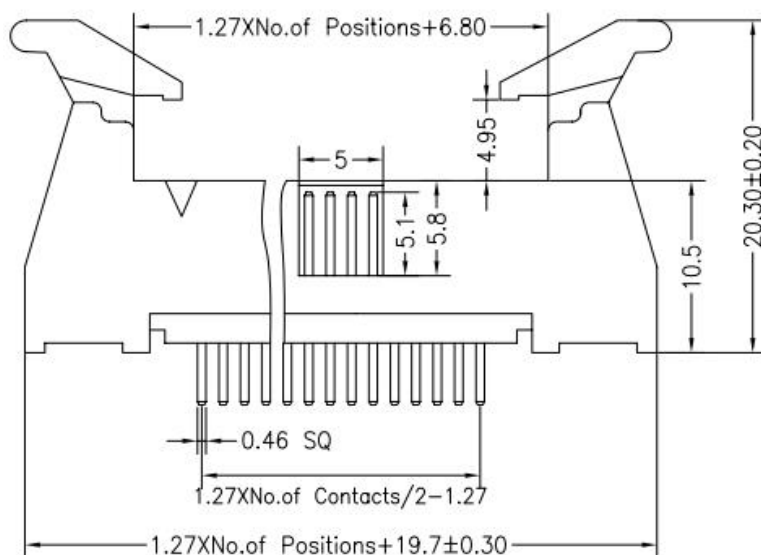



SPECIFICATIONS:

Rated Current	1.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au or SN over Ni
Insulator Material	PA6T
Max. Processing Temp:	230°C for 30-60 seconds 260°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

HC Series	No.of Pin Per Row	Plating Code	Type	Insulator Option	Insulator Color	Latch Code	Packing Code	End code
HC-EH640 1.27x2.54mm Ejector Header	10P	G0=Gold Flash	S=Straiight	A=PBT	B=Black	L=Long	0=PE Bag	X
	100P	SN=Tin Plated		B=PA66	G=Grey		A=Tray	01
		SM=Matted Tin		C=PA6T			T=Tube	02
		S0=Gold/Tin		D=PA46			P=Cap+Tube	
		G1=3u Gold		E=PA9T			R=Cap+Reel	
		G2=5u Gold		F=LCP			X=Special	
		G3=10u Gold						
		G4=15u Gold						
		G5=30u Gold						
		S1=3u Gold/Tin						