


Audio Connector L/R Toslink + Coaxial Digital Audio Converter

Quick Installation Guide Ver. 1.0

All brand names and trademarks are properties of
their respective owners

CONNECTION DIAGRAM:

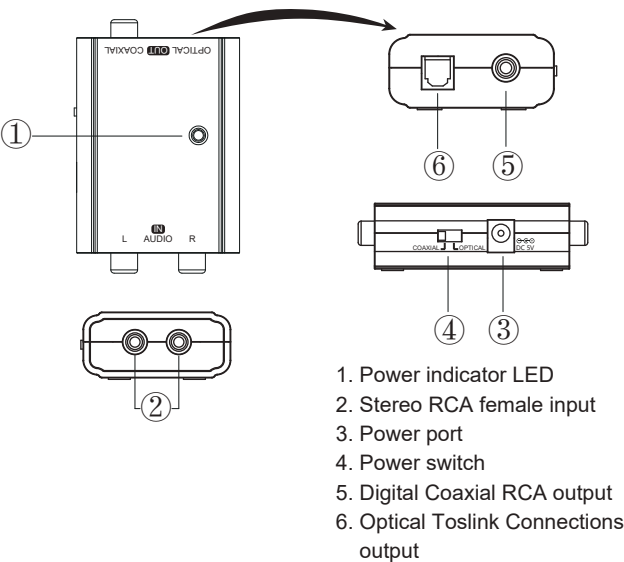

INTRODUCTION:

The is an audio converter that converts a stereo analog RCA audio signal into a digital Toslink audio signal and/or Digital Coaxial RCA. This converter supports both PCM and Bitstream signals. These do not decode the audio signal just convert between the electrical signal and the optical signal. They support all decode formats that the respective interface supports.

FEATURES:

- Supports coaxial to Toslink conversion
- Supports up to Dolby Digital or DTS 5.1
- Sample Rates: 44.1 kHz/ 48kHz / 96 kHz/ 192kHz
- Small size
- Easy installation

PACKAGE CONTENTS:

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- 1) 1 x Coaxial to Toslink Audio Converter
- 2) 1 x USB Power Cable
- 3) 1 x User manual

SPECIFICATIONS:

Product	Digital Audio Converter
Power input	5.0 VDC ; 0.6 A
Conversion	Audio Connector L/R to Toslink + Coaxial
Supported formats	DTS, DTSS.1, Dolby Digital, Dolby Digital 5.1, PCM, AAC, MPEG-2
Supported bitrates	44.1 kHz 24-bit 48 kHz 24-bit 96 kHz 24-bit