



FRAME CORE CHOKES

Introduction:



- 1.The series products contains:
- 2.The figure shown for reference only; Better at providing ODM/OEM to customers. Make the technical parameters more size up the user's product design requirements.

FEATURES:

Small size, Lowleakage flux due to O SQ c ore.
Low stray capacitance, High attenuation of a wide frequency band.
There is no danger of the layer short for the single-layer rolling.
High attenuation to the normal mode noise.
Winding time 90% down.
High inductance was achieved by the ferrite mixing and the baking technology that developed originally.

PHYSICAL CHARACTERISTICS

Electronical Schematic

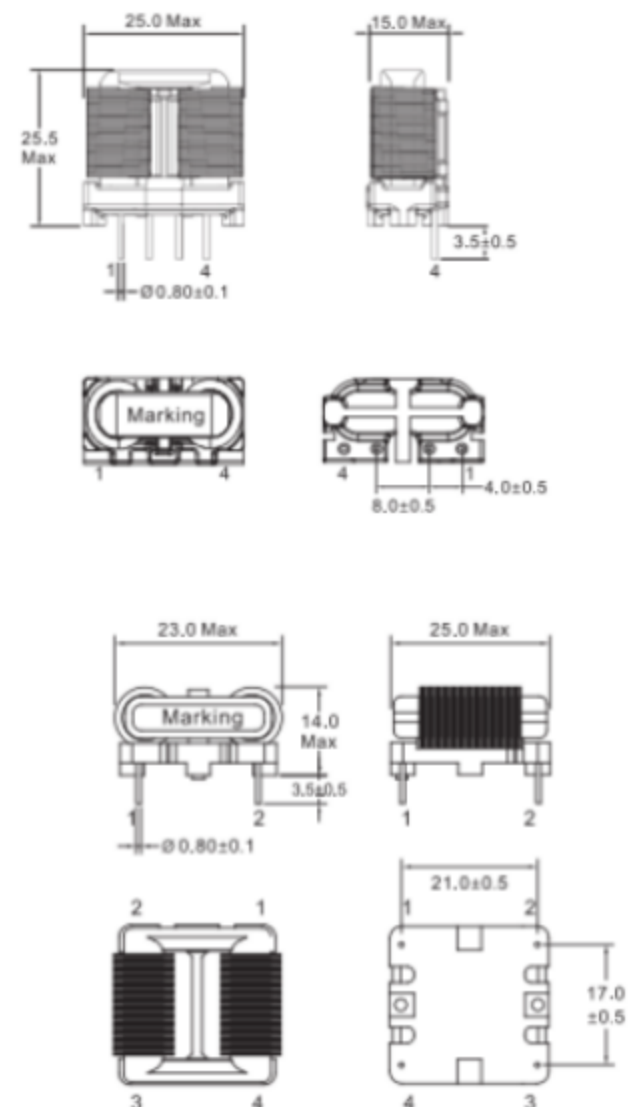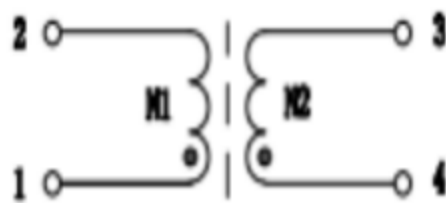

SPECIFICATION:

Rated Voltage: AC/DC 250V.
Operating Temperature Range: -40°C - 120°C
Withstanding Voltage: AC 2000V 60sec or AC 2400V
1 - 2sec[LIN E to LIN E].
Insulation Resistance: DC 500V, 100Mohm Min
[LIN E to LIN E].
Temperature Rise: 40°C Max. at Rated Current.

General Properties

Operating
Temperature: -40°C to +105°C.
Including temp rise
Storage Temperature: -25°C to +85°C.
Insulation Class: B.