

Specifications

(Remark)

1. (MATERIAL)

Housing: LCP+30%G. F UL94V-0, Color: Black

Contact: Brass, 0.8u" MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. (characteristics):



Current Rating: 1 AMP.

Contact Resistance: 20 mΩ MAX.



Insulating Resistance: 1000 MΩ MIN.

Withstanding Voltage: AC 500V.


Temperature Range: -40° C to +105° C

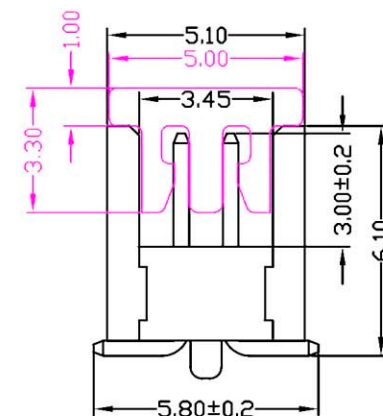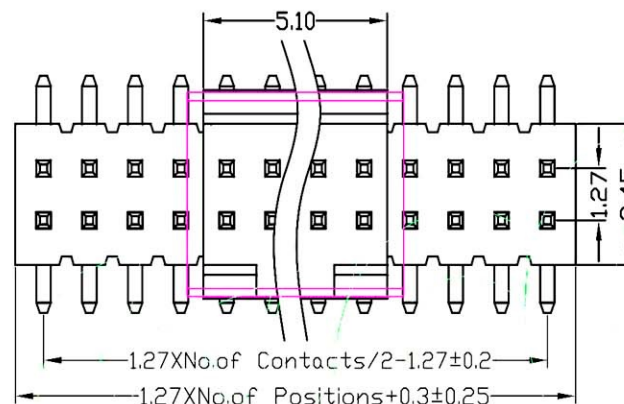

(↑ Y: W/ Locating Peg)

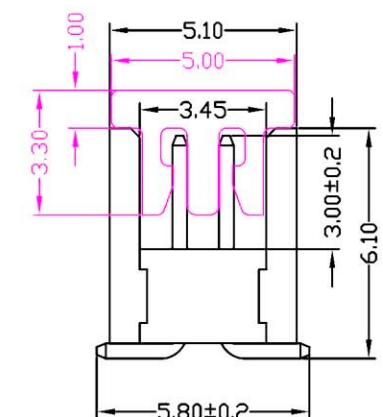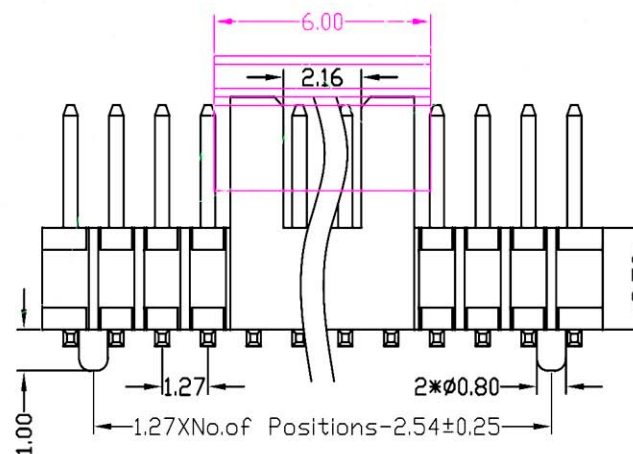

(↑ N: W/O Locating Peg)

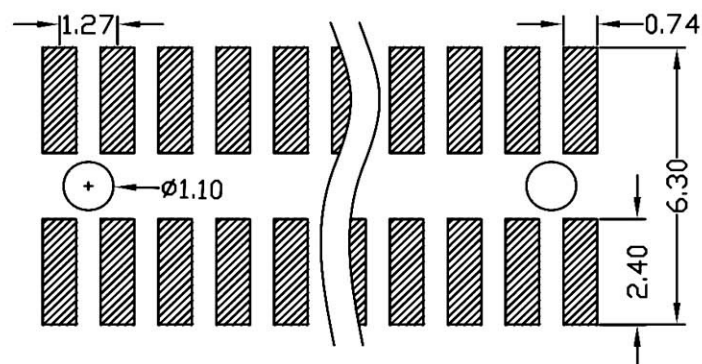

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
DWG.
製圖
DATE
2020/9/11

SCALE
比例
UNIT
單位
PAGE
張數
1 OF 1

TOLERANCE
容許公差
SIZE
紙張尺寸
REV.
版本
A

PART NAME 品名
1.27 X 1.27mm Shrouded Stacker 2X??Pin
SMT TYPE Flash Plating PAD+REEL PACKING
Material: LCP UL94V-0 Black Color ROHS
PART NO.
料號 C3513-XXDGNBQXR