Telpo

TPS508

Safe Entry Code Scanner

QR Code | NFC | LTE | Voice Prompt | Printer

TPS508

Safe Entry Code Scanner

Specification

OS	Android 7.1 or above
Processor	Quad-Core 1.1GHz or above
Memory	1GB DDR, 8GB eMMC 2GB DDR, 16GB eMMC (Optional)
Display	5-inch, 1280*720 or above
Thermal Printer (Optional)	Paper width 58mm, Φ40mm
Contactless Card Reader (Optional)	ISO14443 Type A/B, Mifare, ISO18092 compliant
Built-in 1D/2D Barcode Reader	Soft Decoding Hard Decoding (Optional)
Communications	Ethernet/WiFi/Bluetooth LTE/WCDMA/GPRS (Optional)
Peripheral Ports	2 USB Host, 1 micro USB, 1 RJ45, 1 RJ11
Audio	Digital Audio Speaker
Power Supply	9V/2.5A
Battery	7.4V/2500mAh, Li-ion (Optional)
Others	1 Power Key
Certification	CE, RoHS

Note: Reserve the right to change the parameters without prior notice.

Features and Dimensions

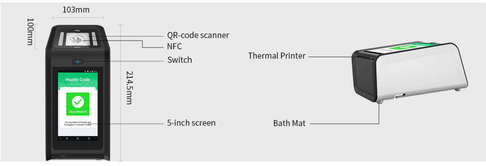

Telepower Communication Co.,Ltd.

www.telpo.com.cn
Tel:+86-757-86227898
E-mail:business@telpo.com
Add:Foshan City,Guangdong Province,China

©Copyright 2021 Telepower Communication Co., Ltd. All Rights Reserved.