


UL3385

RoHS & REACH compliant

BORT cable

环保引领未来

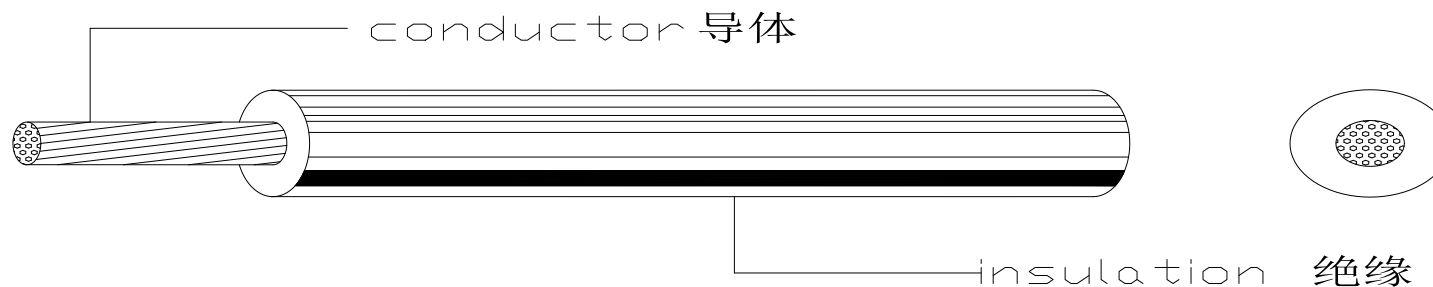

PRODUCT DESCRIPTION:

- ★Rated temperature:105℃
- ★Rated voltage:300V
- ★According to:UL Subject758,UL1581,C22.2
- ★Solid or stranded,tinned or bare copper conductor
32--10AWG
- ★XLPE insulation
- ★Passes UL VW-1&CSA FT1 vertical flame test
- ★Uniform insulation thickness of wire to ensure
easy stripping and cutting
- ★For general purpose internal wiring of appliance

| Conductor | | Finished product | | | Maximum Resistance at 20℃ |
|-----------|------------|-------------------|----------------|---------|------------------------------|
| AWG | NO.of Cond | Insulation Thick. | Outside Thick. | Packing | |
| | No./mm | mm | mm | m/r | Ω/mm |

| | | | | | |
|----|----------|------|------|-----|--------|
| 30 | 7/0.1 | 0.41 | 1.10 | 610 | 354.33 |
| 28 | 7/0.127 | 0.41 | 1.20 | 610 | 223.75 |
| 26 | 7/0.16 | 0.41 | 1.30 | 610 | 139.76 |
| 24 | 11/0.16 | 0.41 | 1.40 | 610 | 88.36 |
| 22 | 17/0.16 | 0.41 | 1.60 | 610 | 60.16 |
| 20 | 21/0.178 | 0.41 | 1.80 | 610 | 38.58 |
| 18 | 34/0.178 | 0.41 | 2.10 | 610 | 22.98 |
| 16 | 26/0.254 | 0.41 | 2.40 | 610 | 15.06 |
| 28 | 1/0.320 | 0.41 | 1.15 | 610 | 227.39 |
| 26 | 1/0.404 | 0.41 | 1.25 | 610 | 142.79 |
| 24 | 1/0.511 | 0.41 | 1.35 | 610 | 89.39 |
| 22 | 1/0.643 | 0.41 | 1.50 | 610 | 54.30 |
| 20 | 1/0.813 | 0.41 | 1.65 | 610 | 33.90 |
| 18 | 1/1.024 | 0.41 | 1.85 | 610 | 21.40 |

博尔特（漳州）电缆有限公司