

Masterials

Pin (outer sleeve) :Brass,

Clip(contact 4 /6finger) :Beryllium copper,heat treated

Plating(outer sleeve) :

Tin plated : 1.25u"m/50u"nickel,5um/200u"Tin

Gold plated: 1.25u"m/50u"nickel,full gold

Plating clip(contact):

1.25um/50 u"nickel,gold or tin plating


Insulator body(black): Glass filled thermoplastic polyester UL94V-0 electrical

Current rating : 3 Amps/contact max.

Contact resistance : 10mΩ /contact

Insulation resistance : 1000M at V=100V

Operating voltage : 60 AC/DC

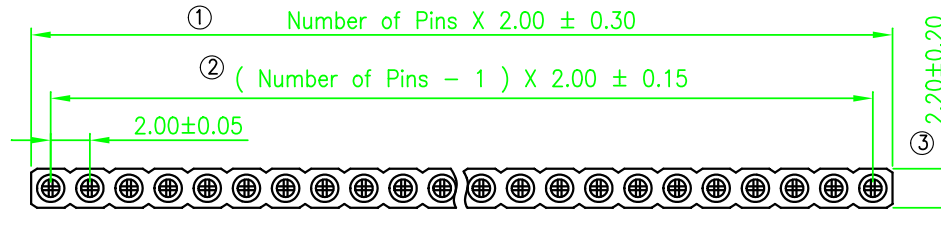

注明:带号码球的为检验尺寸,带▲为重要检验尺寸

Ordering Information


3622- 28 1 XX 2 3 S X

Insulator Type
Code
1:Single row
2:Doube row

No.of Pins
1x40Pins
2x40Pins

The Shape of Pins
S=180°
R=90°

Insulator color
A=Black
B=White
C=Blue

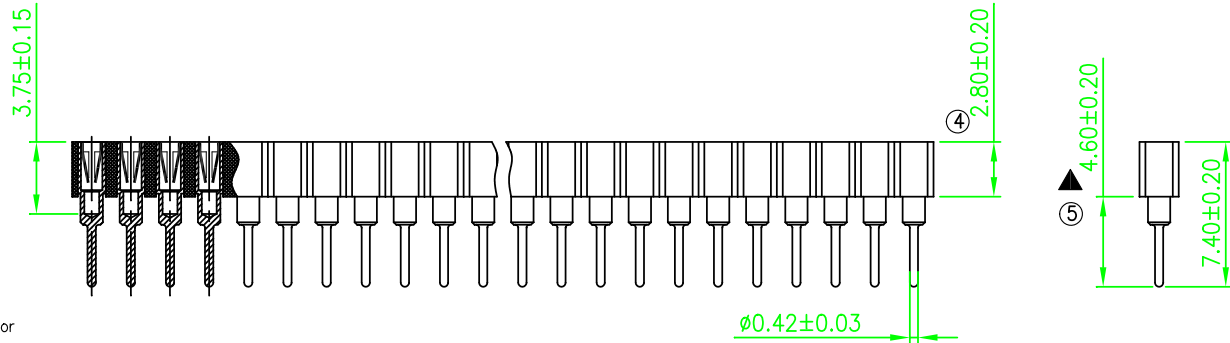

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

YiYuSheng

12.08.08

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

◆

JiLN®

深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

TITLE:

3622-281XX23SX

2.00x2.8圆孔排母 SIP L=7.4

1

2

3

4

5

6

7

8

9