



1. PHYSICAL CHARACTERISTICS (mm)

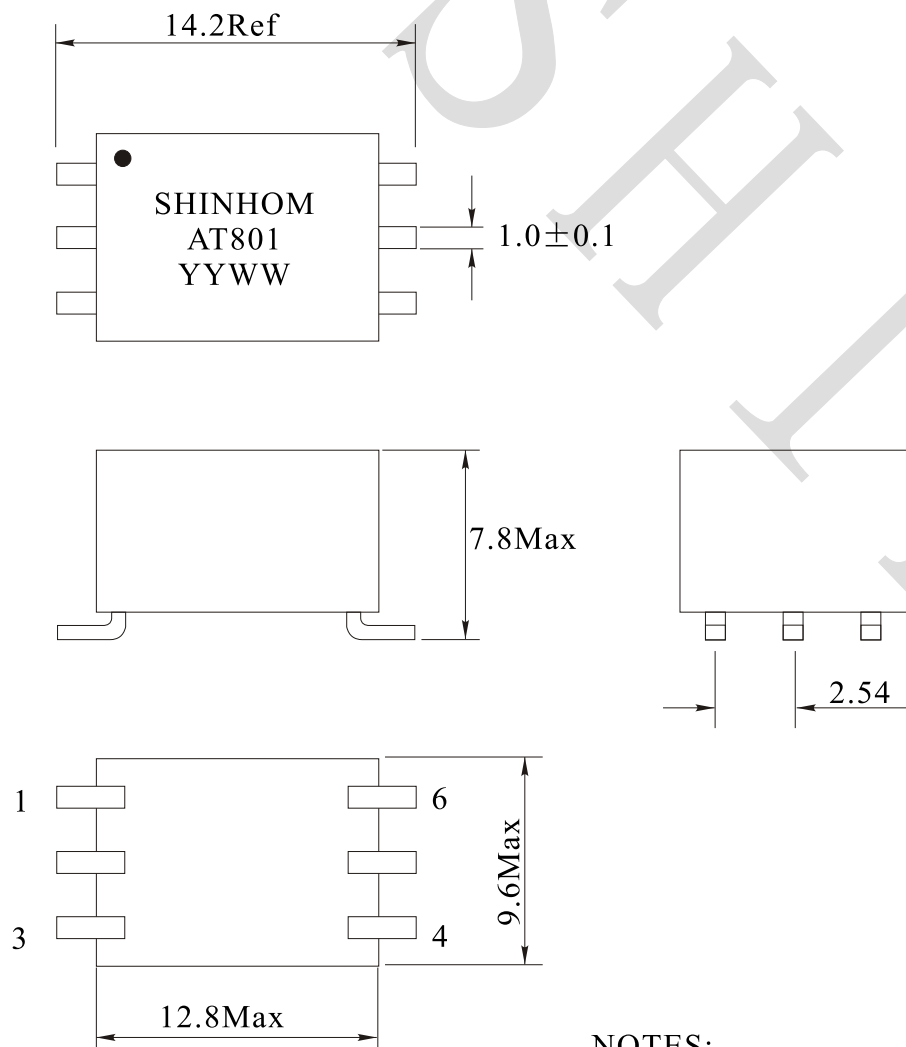

NOTES:

Temp 20°C 48%RH
RoHS Compliant





2. ELECTRONICAL SCHEMATIC

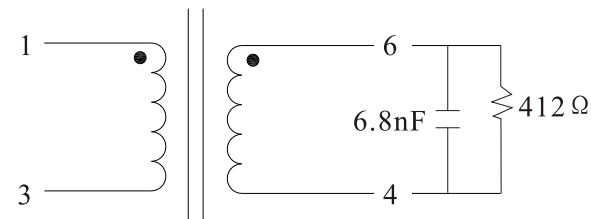

3. ELECTRONICAL SPECIFICATIONS

1. DCR: Pin1-3=115Ω ±15%
Pin4-6=115Ω ±15%
2. INDUCTANCE PARALLEL:
Pin1-3=3.8H Min@200Hz, 0.78V
RESISTANCE PARALLEL 7500Ω Min
3. LEAKAGE INDUCTANCE:
Pin1-3(4-6 short)=6mH Typ@1KHz, 0.1V
4. INSERTION LOSS:
Pin1-3(4-6 W/H 412Ω)=2dB Max@2KHz
5. RETURN LOSS:
24dB Min@200Hz~4kHz
6. TURN RATIO:
Pin1-3: 6-4=1±1%@15KHz, 1V
7. INSULATION RESISTANCE 100MΩ @500VDC
8. HI-POT: 2000VAC 1mA 60SEC: P-S
9. Operating temperature: -20°C to +85°C
10. Storage temperature: -40°C to +85°C

NAME:	Surface Mount Line Matching Transformers		
CUSTOMER P/N:		DATE:	2020-07-08
SHINHOM P/N:	AT801	REV: A1	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	

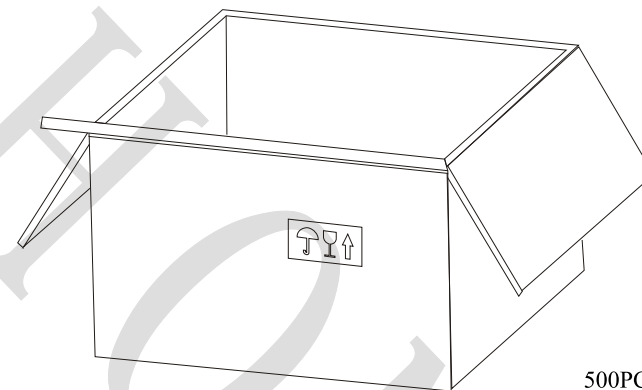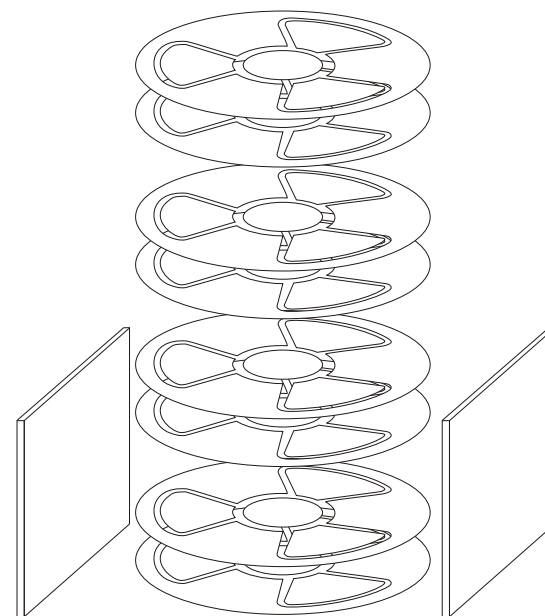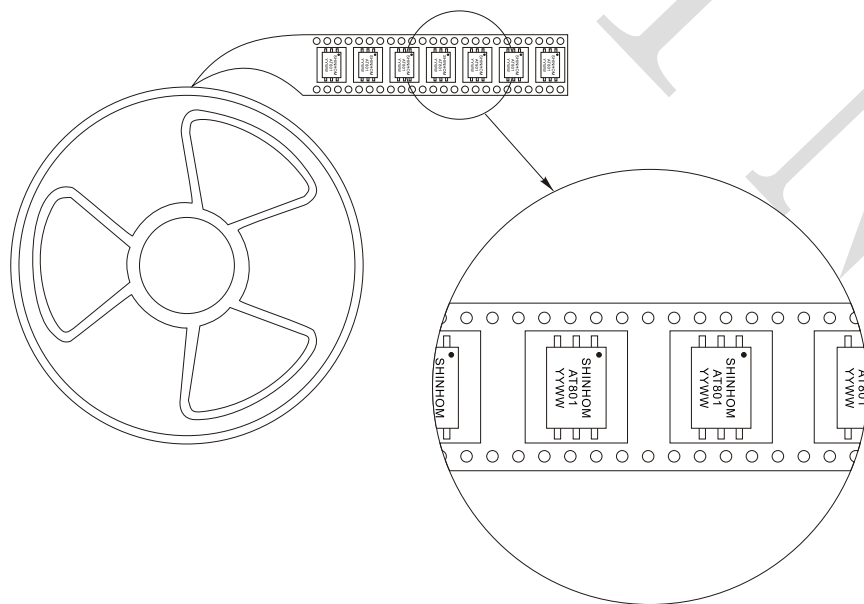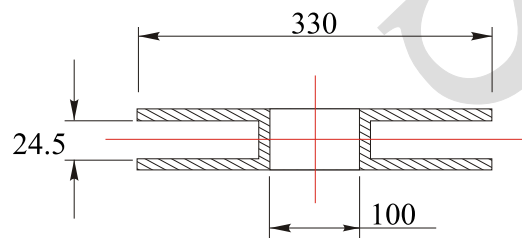

500PCS/REEL
4REELS/CARTON


NAME:		Surface Mount Line Matching Transformers	
CUSTOMER P/N:		DATE:	2020-07-08
SHINHOM P/N:		REV: A1	PAGE
DRAWN BY		CHECKED BY	APPROVE BY



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong
to SHINHOM & is not allowed to be
duplicated without authorization

SOLDER PROFILE

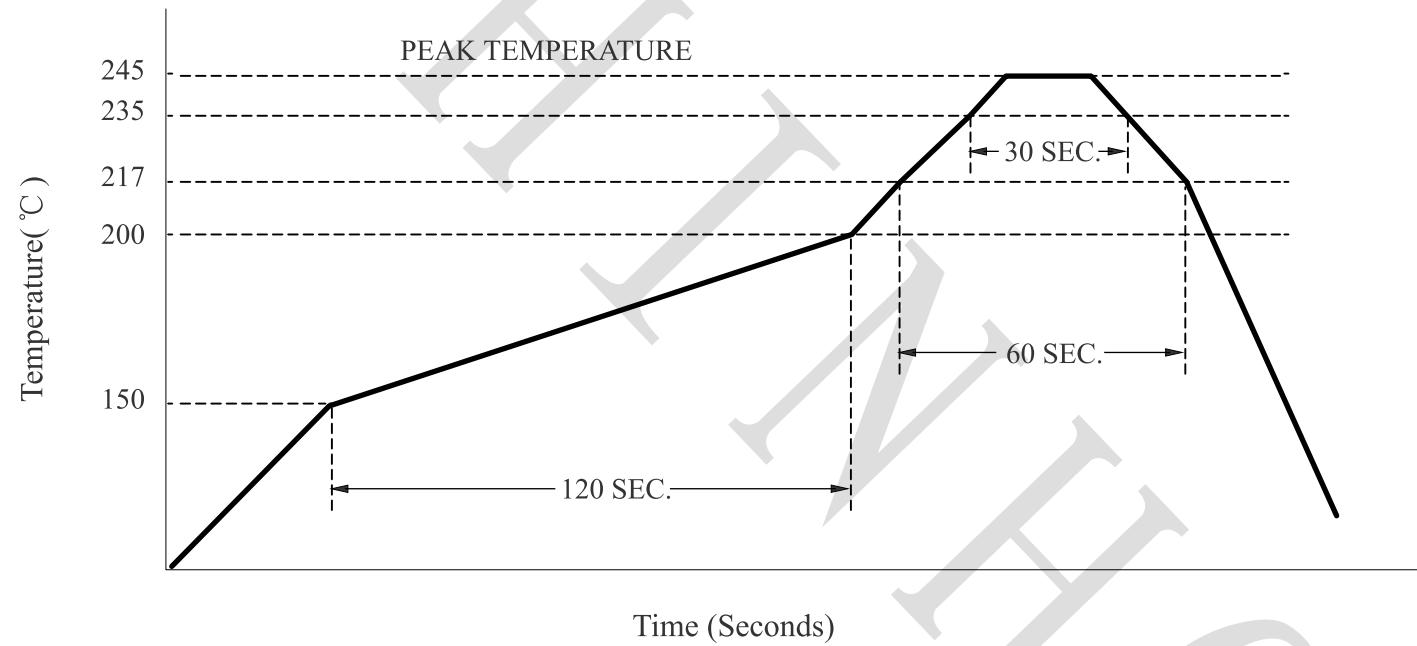

NAME:	Surface Mount Line Matching Transformers		
CUSTOMER P/N:		DATE:	2020-07-08
SHINHOM P/N:	AT801	REV: A1	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization