

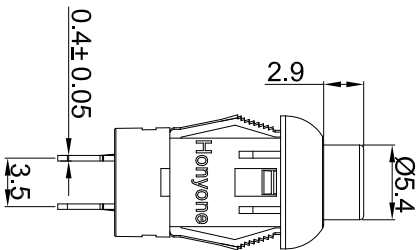
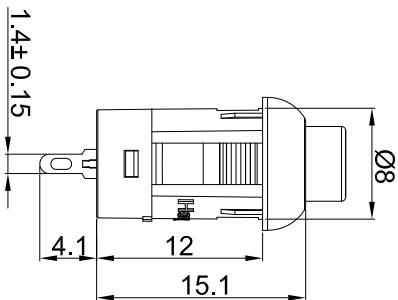



PB11




Rating: 0.2A 36VDC
Contact Resistance: 50mΩ Max.
Insulation Resistance: 100MΩ Min.
Dielectric Strength: AC 500V 1 minute
Total travel: 1.8± 0.3mm
Operating Force: 200± 100gf
Mechanical Life: Over 30,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature: -20° C~+85° C
Manual Welding: 350° C for 3 Seconds
Function: OFF - (ON)

MATERIAL:


Base: PA,UL rated: 94 V-2 Min;
Cap: PC;
Terminal: Copper, Golden plated ;



CIRCUIT



CUT-OUT



Z	D
0.8~1.0	8.0-8.1
1.0~1.7	8.1~8.25

Note:
1.This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350 ° ±5 ° and time is 3± 0.5 seconds;
2.After the product is welded on the PCB board,it is prohibited to use any solvent to clean the PCB board,and avoid the influence of the inner product.

A3	规格参数更新	2023.02.13	N/A	公差 TOLERANCES	≥30(±0.5)	5~30(±0.3)	≤5(±0.2)	角度 ANGLE ±5°	单位	DIMENSION UNIT		mm.
A2	增加产品焊锡说明	2016.10.07	N/A	视角		比例尺 SCALE	NONE	日期 DATE	品 名		TITLE	图 号
A1	灯端子与接线端子脚长度更改区分及卡耳修改	2014.05.22	N/A	VIEWING ANGLE		SCALE	NONE	DATE	PB11-1-10-0N			DRAWING NO
A0	New Issue	2011.12.01	N/A	核 准	Richard	核 对	Sinc	绘 图	PB11-1-10-0N			PB11-1-10-0N_CP_A3
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	DATE	DRAWN BY	ShaoFei Ma				