

Technical drawing of a mechanical assembly, showing two views: a side view and a front view.


Side View Dimensions:

- Total length: 18 ± 0.1
- Distance from left edge to first pin center: 9.8 ± 0.1
- Pin diameter: $\phi 2$
- Distance between pin centers: 6.6 ± 0.1
- Distance from last pin center to right edge: 4.9
- Overall height: 66.8 ± 0.3
- Distance from bottom flange to top surface: 8.2 ± 0.1
- Distance from bottom flange to internal feature: 3.3 ± 0.05
- Distance between internal features: 6.6 ± 0.2
- Distance from internal feature to right edge: 3.3 ± 0.05
- Width of top flange: 4
- Width of middle section: 4
- Width of bottom flange: 2.5

Front View Dimensions:

- Overall width: 9.7 ± 0.1

项 目	参 数
电 路 图	
额定电压、电流	0. 3A 30V DC
绝缘电阻	≥100M Ω
接触电阻	≤30m Ω
耐压	250V AC/1min
电气寿命	≥10000次
使用温度	-25～55℃
动作力	420±100g

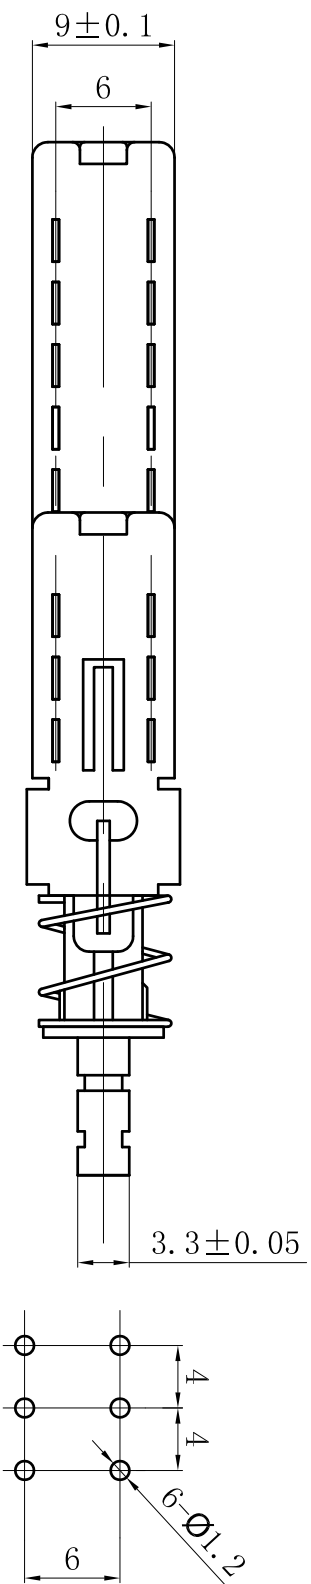

KANZ2-6-00					KANZ2-6-00					
设计	数量	更改单号	签名	日期	KANZ2-6-00 双层直键开关					
审核										
工艺										
标准化					KANZ2-6-00					
批准										
KANZ2-6-00 双层直键开关					乐清市安合电子有限公司					
					第 张 共 张					
					阶段 标记		质 量		比 例	
					A B				1 : 1	