






Level-1 Controlled Substances are banned

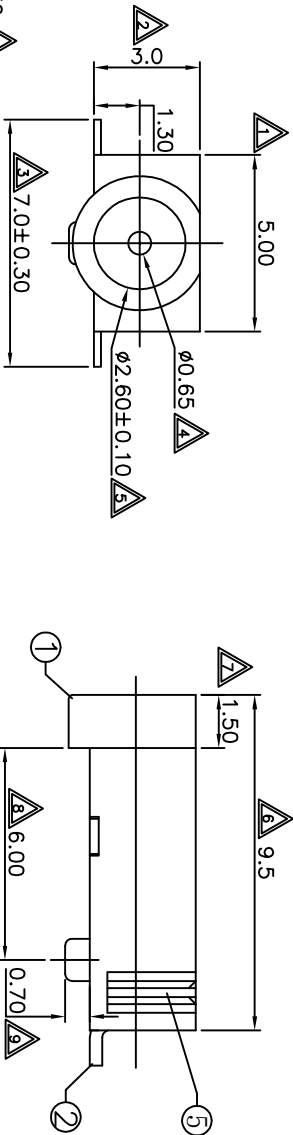

P.C.B LAYOUT
TOP VIEW

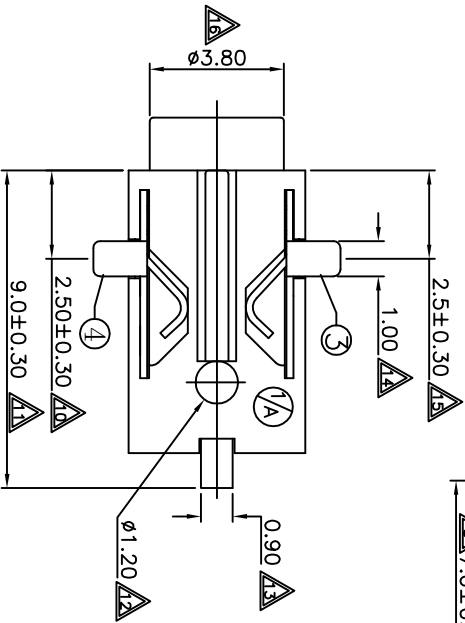

- SPECIFICATION
- 1. Rating : DC 30V 0.5A;
 - 2. Contact resistance: ≤0.03Ω;
 - 3. Insulation resistance: ≥100MΩ (DC250V);
 - 4. Withstand voltage: 500VAC ;
 - 5. Insertion and extraction force: 3-30N;
 - 6. life test: 5,000 cycles.
 - 7. Marked  are important dimensions.

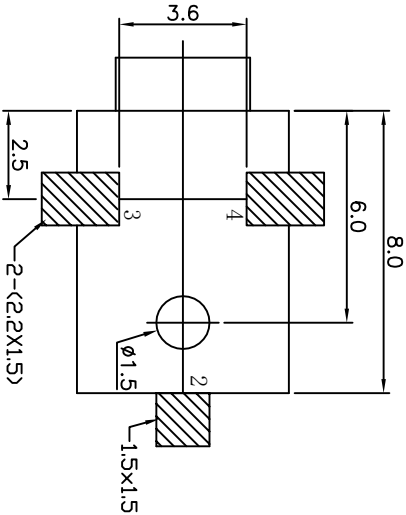

				DESIGN							
		A		16'/10/11		Jason		16'/10/11			
		A		16'/10/11		Max.hu		CHECK			
		O		12'/06/05		NEW		Jason		16'/10/11	
		O		12'/06/05		Steven		Max.hu			
ECN(DCN) NO.		REV		DATE		DESCRIPTION		CHANGE		APPRO.	

盛 聰 电 子 有 限 公 司
SHENG CONG ELECTRONIC CO.,LTD

5	STOPPER	1	SUS301	—	Ag-Plating
4	SPRING	1	SUS301	—	Au-Plating
3	SPRING	1	SUS301	—	Au-Plating
2	PIN	1	BRONZE	—	Ag-Plating
1	HOUSING	1	PAGT	—	—
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED					
General		Angle		CUSTOMER COPY	TITLE: DC-JACK
X ± 0.50		X ± 3°			
XX ± 0.30		XX ± 2°			
XXX ± 0.20		XXX ± 1°			
XXXX ± 0.10				PART NO.	DJ-S054
PROJ:		SCALE: 5:1	UNIT:mm	SIZE: A4	SHEET: 1 OF 1