REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B		2025/09/24	Delu	Modify Overview&Tolerance
C		2025/10/14	Delu	Modify Nut Size
D		2025/11/19	Delu	Modify Cable Length

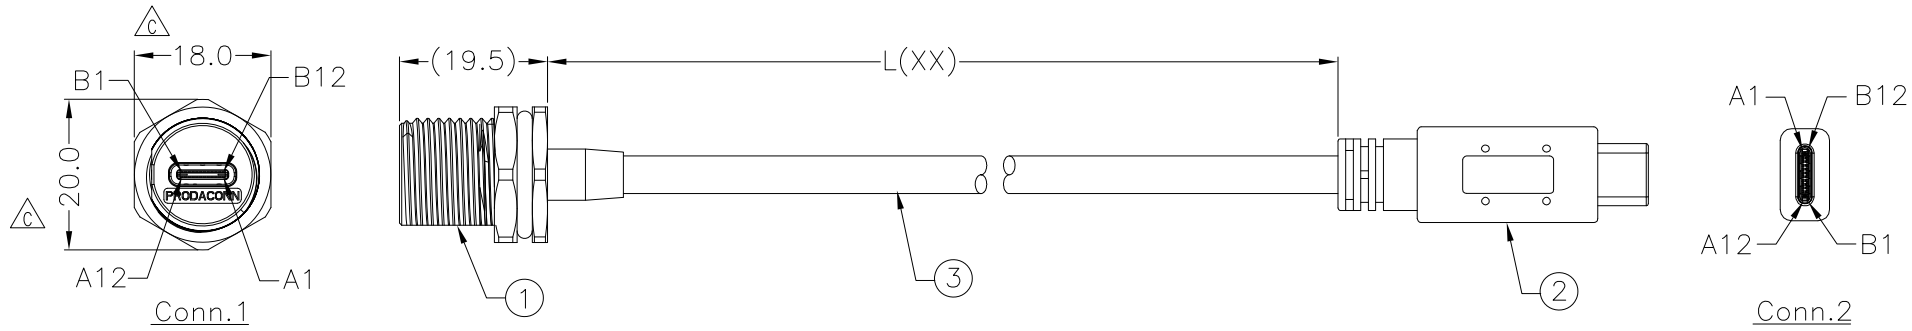

B IP Grade: IP67 Mated

Shell	Drain			Shield	Shell
B5	Red		紅	VCONN	B5
A6	Green		綠	D+	A6
A7	White		白	D−	A7
A12	Drain			GND	A12
A10	Blue	Green	綠藍	RX2−	A10
A11	White	Mylar	綠白	RX2+	A11
B1/A12	Drain			GND	B1/A12
B3	Blue	Orange	橙藍	TX2−	B3
B2	White	Mylar	橙白	TX2+	B2
B8	Blue		藍	SBU2	B8
A8	Black		黑	SBU1	A8
A5	Yellow		黃	CC	A5
B10	Blue	Red	紅藍	RX1−	B10
B11	White	Mylar	紅白	RX1+	B11
A1/B12	Drain			GND	A1/B12
A3	Blue	Blue	藍藍	TX1−	A3
A2	White	Mylar	藍白	TX1+	A2
A4/A9 B4/B9	Gray		灰	VBUS	A4/A9 B4/B9
	Green		綠		
	Brown		棕		
Conn.1	Wire Color				Conn.2
Pin Out					

B Part No.:
UCM24−S09F−SCH−CX
└ Cable Length
1: 100mm±30mm
2: 200mm±30mm
3: 300mm±30mm
D

Note:
1* Conn.1: Type C Female PG9
O−Ring: Silicone,Black.
Shielding: Zinc Alloy,Nickel Plated
Nut: Copper Alloy,Nickel Plated
2* Conn.2: Type C Male
3* Cable:28/28/24+AEB
PVC Jacket,OD5.0mm,Black



Recommend
Panel Cut−Out

PRODACONN

All dimension in mm

TOLERANCE UNLESS OTHERWISE SPECIFIED	REV.
±0.5	D
	SCALE: Free

DRAWN BY	APPROVED BY	DATE(Y/M/D)	PAGE	SIZE
Delu	Roy	2025/02/05	1/1	A4

PART NO: UCM24−S09F−SCH−CX

CUSTOMER NO:

TITLE: TYPE C TO TYPE C WITH CABLE

THIS DOCUMENT IS CONFIDENTIAL AND A PROPERTY OF PRODACONN DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY PRODACONN