


UL 20276 Multi-conductor Computer Cable 多芯电脑线

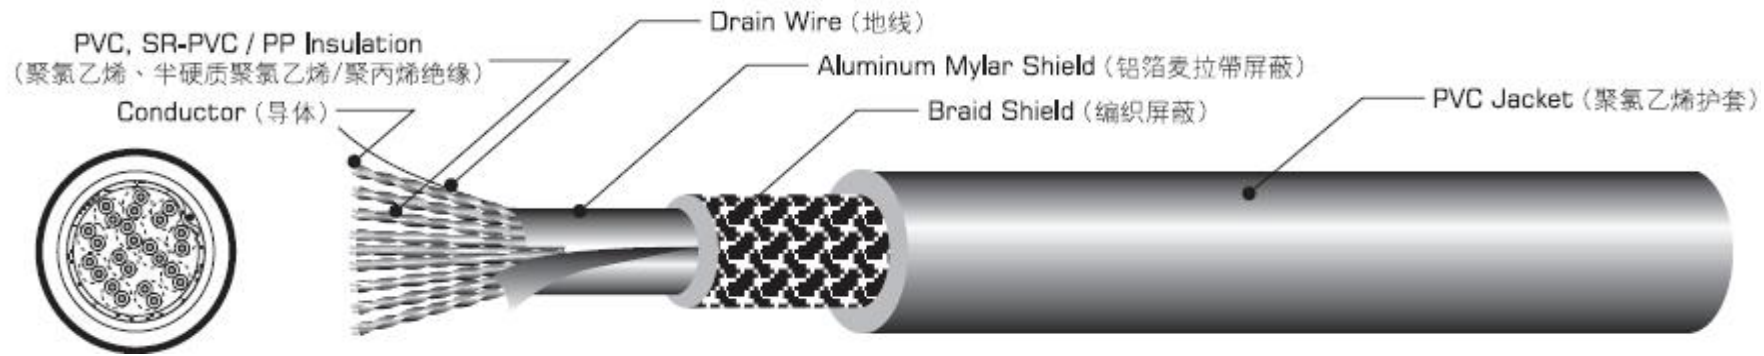

Product Description:

- ★ Rated temperature: 80℃
Rated voltage: 30V
- ★ Reference Standard: UL Subject 758, UL1581 & CSA
C22.2 No.210.2
- ★ Stranded, tinned or bare copper conductor
- ★ Lead free PVC jacket
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Application: For internal wiring or external wiring of Class 2 systems
equipment and electronic equipment

Cores	Conductor			Insulation		Drain Wire No./mm	Overall Shield		Jacket		Maximum Resistance at 20 °C Ω /km
	AWG	No./mm	Nom./Dia. mm	Nom. Thick. mm	Nom.Dia. mm		Material	Coverage	Nom. Thick. mm	Dia. mm	
3P	26	7/0.16	0.48	0.26	1.00	-	PAPER	82%	1.05	6.40	139
1C	26	7/0.16	0.48	0.26	1.00						139

3P	28	7/0.127	0.38	0.12	0.63	7/0.16	AL	95%	0.56	4.70	223
9C	28	7/0.127	0.38	0.12	0.63						223
6P	28	7/0.127	0.38	0.12	0.63	7/0.127	PET	70%	0.70	4.70	223
7P	28	7/0.127	0.38	0.12	0.63	-	PAPER	90%	0.95	5.30	223
8P	28	7/0.127	0.38	0.12	0.63	7/0.127	PET	74%	0.70	5.00	223
12P	28	7/0.127	0.38	0.12	0.63	7/0.2	AL	84%	1.00	6.70	223
1C	28	7/0.127	0.38	0.12	0.63						223
13P	28	7/0.127	0.38	0.12	0.63	7/0.2	AL	85%	0.92	7.00	223
18P	28	7/0.127	0.38	0.12	0.63	-	AL	80%	0.76	7.40	223
19P	30	7/0.1	0.30	0.15	0.60	7/0.127	AL	85%	1.28	8.50	354
25P	30	7/0.1	0.30	0.15	0.60	7/0.127	AL	85%	1.39	9.50	354
25P	28	7/0.127	0.38	0.12	0.63	-	AL	80%	0.72	8.20	223