


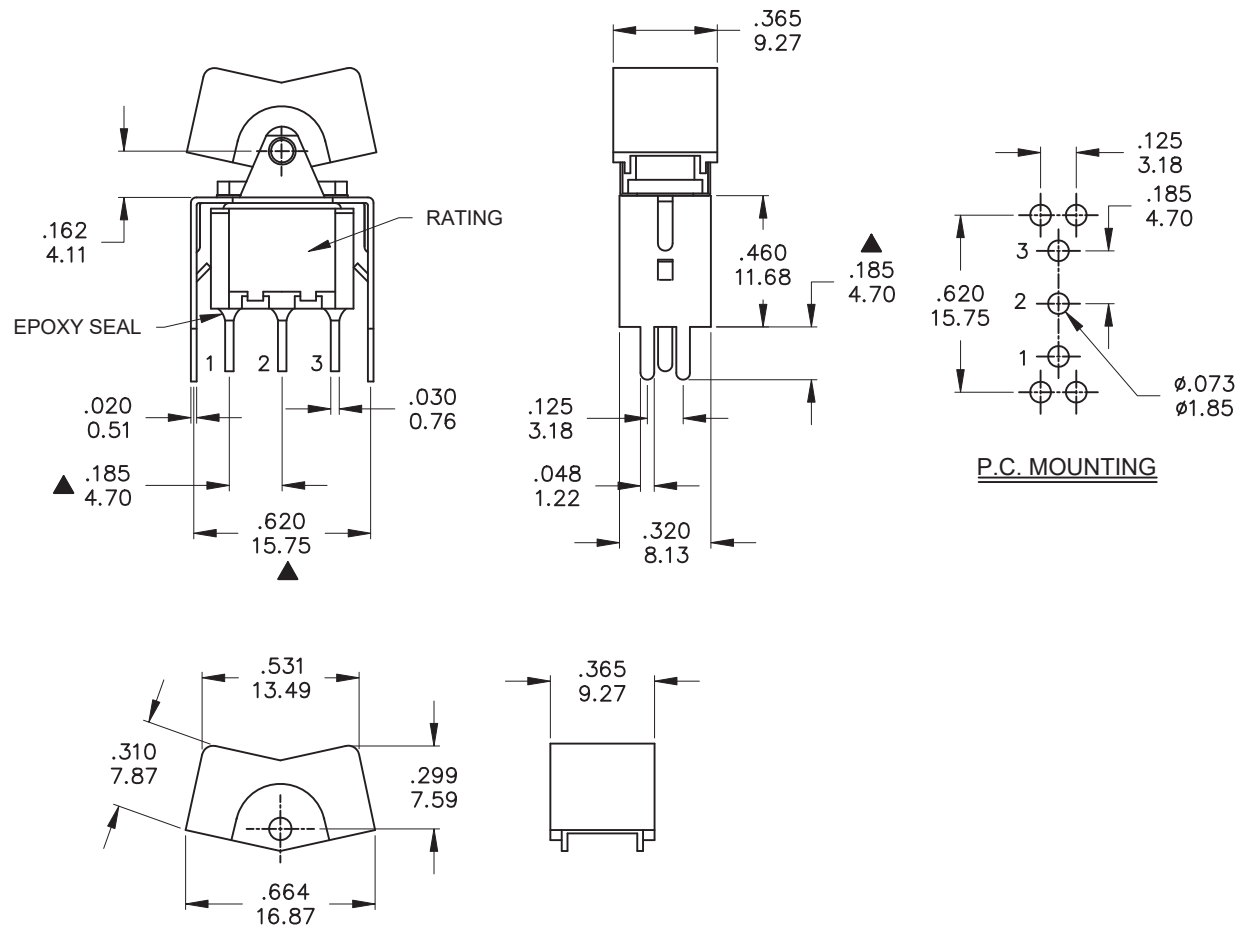

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 10 mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,000 V rms min. @ sea level.

OPERATING TEMPERATURE: -40°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).

ACTUATOR: Nylon, Gray.

BUSHING: Zinc, nickel plated.

HOUSING: Stainless Steel.

SWITCH SUPPORT: Brass, Tin plated.

TERMINAL/CONTACT: Copper.

RoHS & Lead Free

Model No.	POS.1	POS.2	POS.3
3MS3	ON	OFF	ON
Term. Comm.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Silver	5 Amps @120 VAC or 28VDC
C	Gold over Silver	Gold over silver	2 Amps @250 VAC
R	Gold	Gold	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)

深圳易凯达科技有限公司
WIN-KARE TECHNOLOGY CO.,LTD.

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2		TITLE 圖 名	Miniature Rocker & Paddle Switches			SIZE 圖紙	A4	
1	Ⓐ				TOLERANCE (公差) : 0.00mm±0.25mm 0.0mm±0.40mm ANGULAR: ±5° FILE NAME : 3MSP1061		DWG NO. 圖 號	3MS3J109VS2RES			UNIT 單位	inch mm	
2	Ⓑ						REV. 版 本	A	DATE 日 期	OCT - 17 - 2022		SHEET 張 數	1 of 1
3	Ⓒ						APPROVE 審 核		CHECK 確 認		DRAW 製 圖	IRENE	
4	Ⓓ												
5	Ⓔ												