

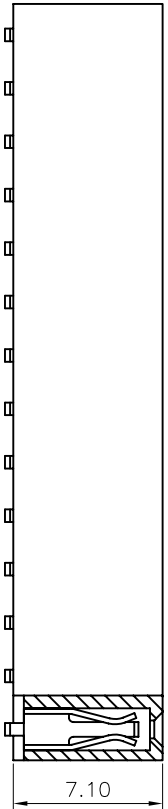


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2009-04-09
A1	增加平整度公差	2011-04-07

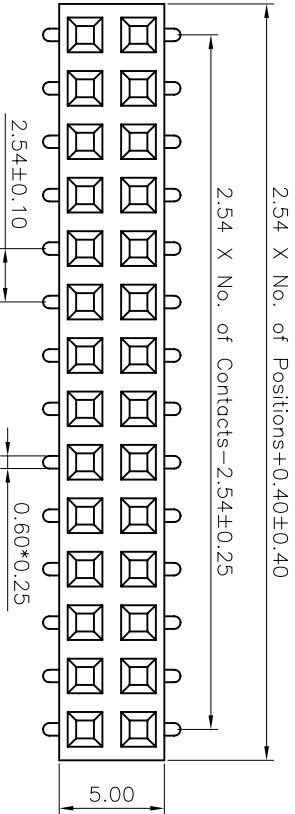

Technical Data

Material:

Contact Material: Phosphor Bronze

Insulator Material: Black Polyester UL94V-0

Standard: PPA6T+30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V


Withstanding Voltage: 1000V AC/minute

Mechanical:

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +260°C max.

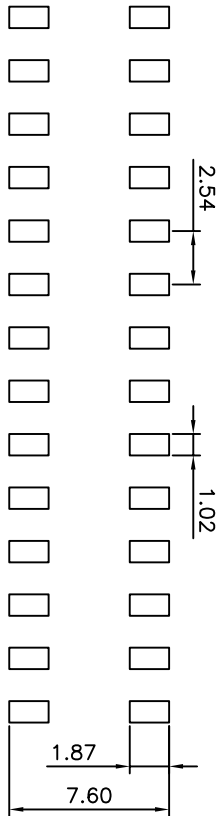

P.C.B LAYOUT

F132	12	XXX	XX	S	C	B	N	A	00
------	----	-----	----	---	---	---	---	---	----

Product Descriptions F132 H=7.1	Product Type 12 Dual row	No. of Positions XXX Poles	Pin Plating G1 Gold "1u" SN Sn120u"	Angle options S SMT	Insulator Material C PA6T	Color B Black	Feature N No	Series NO. A OE=6.6
------------------------------------	-----------------------------	-------------------------------	---	------------------------	------------------------------	------------------	-----------------	------------------------

ANYCONN® 东莞市精捷电子有限公司

DONGGUAN ANYCONN ELECTRONIC CO.,LTD

TOLERANCE		PROJECTION		TITLE:	
ANGLE	±5°	DATE :	2011-04-07	PH 2.54 H7, 1mm Double Row SMT Female Header	
X.XXX	±0.10	DRAWN :	heig	PART NO: F13212XXXXXSCBNA00	
X.XX	±0.20	CHECKED :		DRAWING NO:	
X.X	±0.30	APPROVED :		REV: A1	UNIT: mm
X.	±0.50			SCALE: 3:1	SIZE: A4