

Smart WIFI Smoke Sensor WSD01




Features:

- * SMOKE SENSOR: Detect smoke, issue alert Send notifications to smartphone;
- * 2.4GHz WiFi One-Key Connect ;
- * Easy Setup: DO not need home gateway, you can easily achieve the intelligent control Of home appliances, simple operation, easy to use. 2.4GHz protocol is more Stable, faster and more convenient;
- * Plug and Play Farewell Tedious: small size which do not take place, plug in anytime to use, easy and convenient;
- * Multiple functions More reliable: Smart Alarm, Sound alarm at the same time flashing, dazzling red light with alarm, full Of power.
- * Smoke Detection/Temperature Alarm/High-dB Alarm /Flashing Alarm/High Sensitivity/Work day and night /Push notifications/APP Remote Control;
- * Small & Compact Appearance reasonable size design, optimize the internal structure, which bring you convenience, beauty and enjoyment;
- * Smartphone Remote Control to Make Your Home Smarter
- * NO MATTER HOW FAR AWAY FROM HOME, THE WARMTH OF HOME IS IN HANDS
- * Support multi-device controlled, enjoy your smart home with WiFi smart home devices.
- * LARGE CAPACITY MORE DURABLE: full of power long durable, replace the battery is simple, service more intimate.
- * High Sensitivity Smoke Detection: When fire breaks out, the sensor will detect smoke sensitively, and send an alarm ringtone, then push notifications to your smartphone to protect people and property.
- * High Temperature Trigger Alarm: When the local temperature exceeds 50 °C , even if there is no Smoke, the sensor will trigger an alarm to prevent the fire from happening in advance.

Parameters:

Model	WSD01
Battery	DC9V/6F22
Battery Life	1-2 Years
Standby Current	30uA
Working Current	40mA
Alarm Sound	85 dB
Wireless Type	2.4GHz
Protocol	IEEE 802.11b/g/n
Wireless Range	45M
Tem. to be Triggered	>50°C
Operate Temper	-10°C - 65°C (-4°F - 149°F)
Operating Humidity	20% -85% non-condensing
Storage Temper	0°C - 60°C (32°F - 140°F)
Storage Humidity	0% -90% non-condensing
1pcs Package	105*105*38mm/0.13kgs
100pcs Package	56*40*23CM

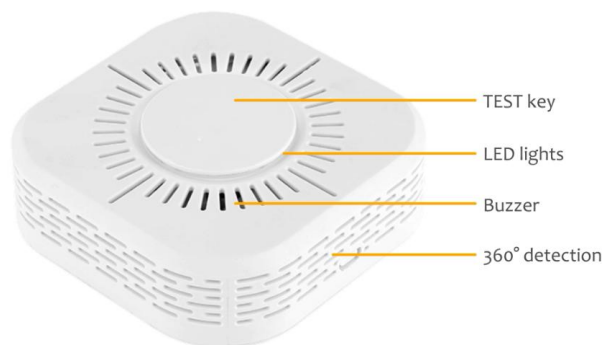

Install with a 6F22 battery

Interface: