



XX-303 系列(中国、美国、欧洲)



外观专利: ZL 200530114020.3 实用专利: ZL 200520100975.8

按钮式 Pushbutton Type

B

RoHS PAHS NP REACH



特长 FEATURES

- 外壳采用工程塑料 PA66、PC, 实现高可靠性。
PA66,PC engineering plastic housing,with high reliability.
- 适用 Applicable
H03VVH2-F2 x 0.75mm²
H03VVH2-F3 x 0.75mm²
H03VVH7-F1 x 0.5mm²
SPT-1/18AWG x 2C
SVT/18AWG x 2C
- 装配方式: 压入式装配
Mounting mode: Pressurized mounting.

用途 APPLICATIONS

- 适用于各种携带电源线控制的灯具、电器、变压器。
It's applicable for various lighting apparatus,electrical apparatus and transformers with power line.

颜色 COLOUR

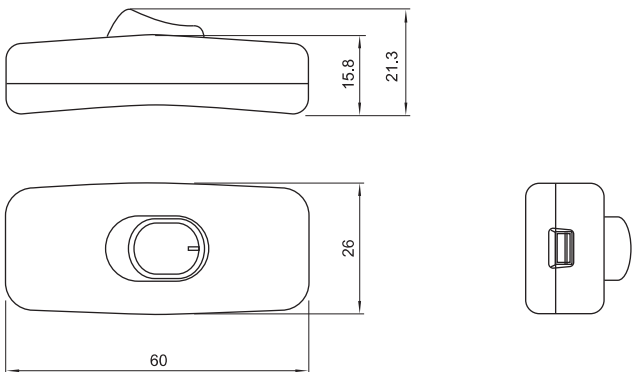

- 黑色、白色、透明色、红色、黄色、绿色、灰色、棕色。
Black,white,transparent,red,yellow,green,gray,brown.

产品性能一览表 LIST OF PRODUCT PERFORMANCE

环境温度(Environmental temperature)	-40℃~+85℃	耐电压(Withstand voltage)	≥ 2500V/5S/0.025MA
额定电流、电压(Rating)	2A 250V / 3A 125VL	冲击电压(Percussive voltage)	0.5NM ± 0.04NM
接触电阻(Contact resistance)	≤ 0.02Ω	拉力测试(Tensile testing)	30N/min
绝缘电阻(Insulation resistance)	≥ 100MΩ	操作寿命(Operational life)	10000 次
介电强度(Dielectric strength)	≥ 1500VAC/min	燃烧性(Combustibility)	94V 2 级

外形图 OUTLINE

电路图 CIRCUIT

尺寸 Size	单极 Unipolar
	

Tel:+86-755-25003073;Fax:+86-755-25003079

Http:\\www.win-kare.com; Mail:service@win-kare.com