


ROHS COMPLIANT

Ordering Information

HMISH15 - XX XX A001 X X X

No. Of Pins	Standard	Pin Length	Insulation Contact Material	Packing A=PE Bag
Per Row	Plating	001=2,3,4,0/19,0	Material	B=box
02 40	0=Gold Flash	021=3,0/3,0,3,0	P=Plt	
	11=Plating Tin	XXX=Select A/B/H	P=Pin	D=tube
	XX=Select Plating	L=LCP	Bronze	

Dimension Antitheses List			
Item	A	B	H
Standard	2.5	4.0	19.0
Select			

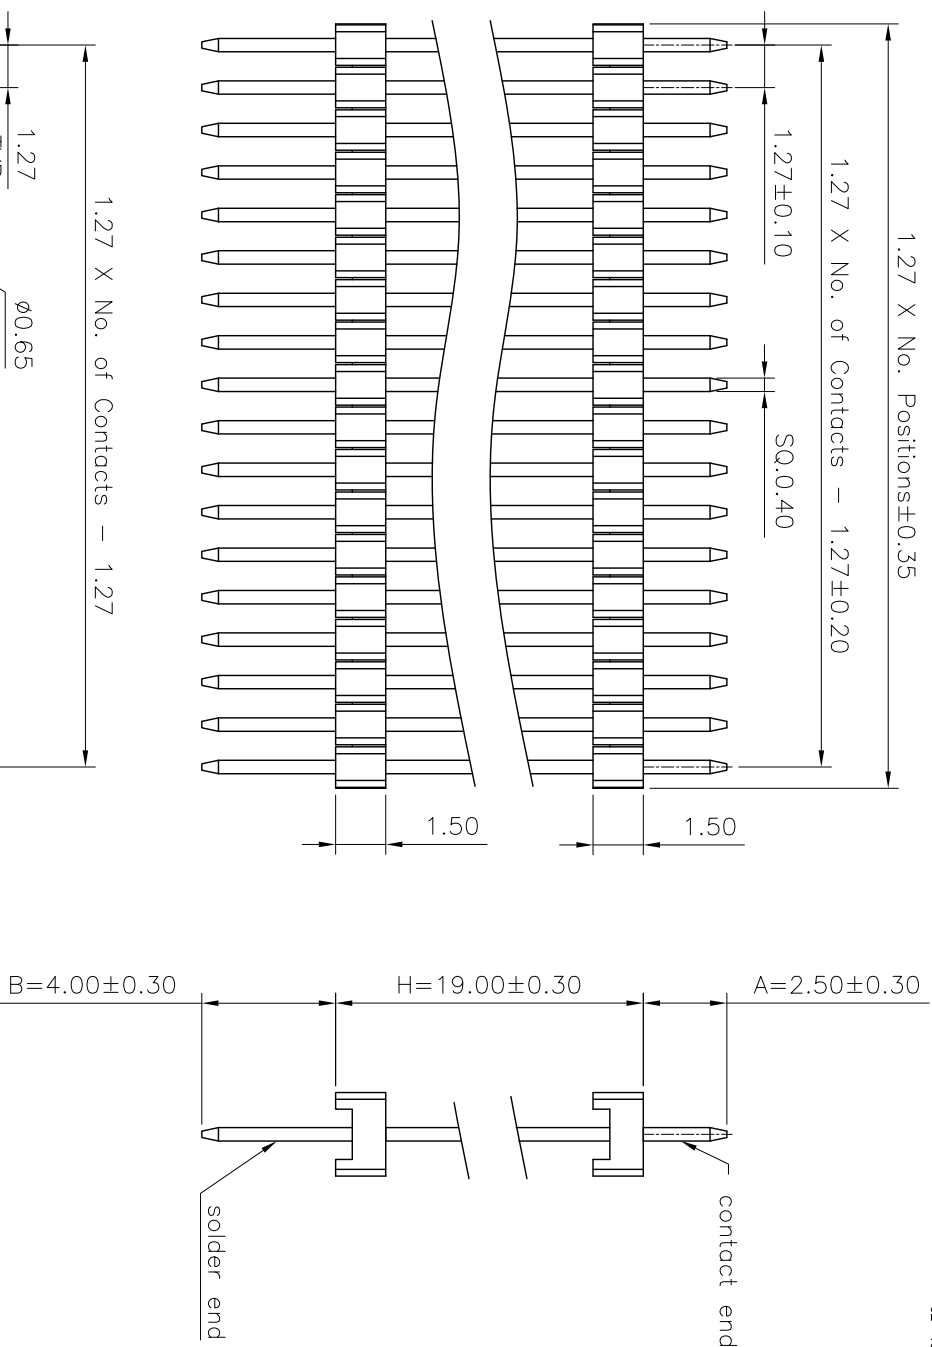

Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
Insulation Material: Polyester, UL 94V-0
Nylon 6T

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN DATE		ELETTE TECHNOLOGY CO., LTD	
Andy2005.08.12		CHECK DATE		FILE NAME		億涿得股份有限公司	
X. ± .X ±0.38 .XX ±0.25 .XXX ±0.13		X. ±5 X* ±2 X* ±1 .XX ±0.5		Feng		1.27 PIN HEADER SQ.0.4 BOARD SPACER SINGLE ROW 1.5 DIP TYPE	
UNIT:mm		SCALE 1:1		APPRO. DATE		PART NO	
A4		SHEET: 1 of 1		DRAWING NO		HMSH15-A001	
				REV. AC			