

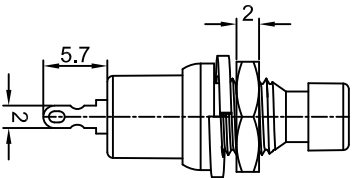
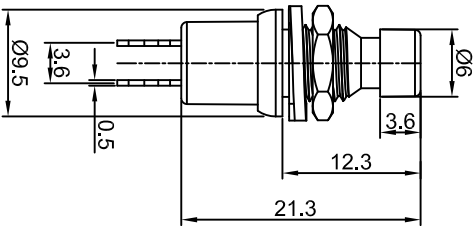



PB05



CUT-OUT Panel Thickness: 3mm MAX.

Rating: 3A 125 VAC
1.5A 250 VAC
Contact Resistance: 20mΩ Max.
Insulation Resistance:DC 500V 100MΩ Min.
Dielectric Strength:AC 1000V 1 minute
Total travel:1.4±0.4mm
Operating Force:200±50gf
Mechanical Life: Over 30,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature:-20°C~+70°C
Soldering Temperature:256°C for 5 Seconds
Function: OFF - (ON)
Welding method:Manual Soldering
(350° C±5° C,3s±0.5s)

MATERIAL:

Base: Brass, Chrome or Tin plated ;
Cap: ABS ;
Terminal: Copper, Silver or Tin plated ;
Nut: Brass,Chrome or Tin plated .

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

公差 TOLERANCES			视角	比例尺	角度	单位	品名	图号
			VIEWING ANGLE	SCALE	ANGLE±1°	DIMENSION UNIT	TITLE	DRAWING NO
A2	重新整理	2016.12.11	N/A		NONE	日期		
A1	重新整理	2016.06.29	N/A	核准		2016.12.11		
A0	New Issue	2011.12.08	N/A	Richard	Sinc	P.W.Rao	PB05-B-B	PB05-B-B_A2
变更说明 CHANGE DESCRIPTION			日期 DATE	CHECKED BY	绘图	DATE		
版本 VER.			ECN NO.	APPROVED BY	DRAWN BY			