


Ver	Date	Modify Contents

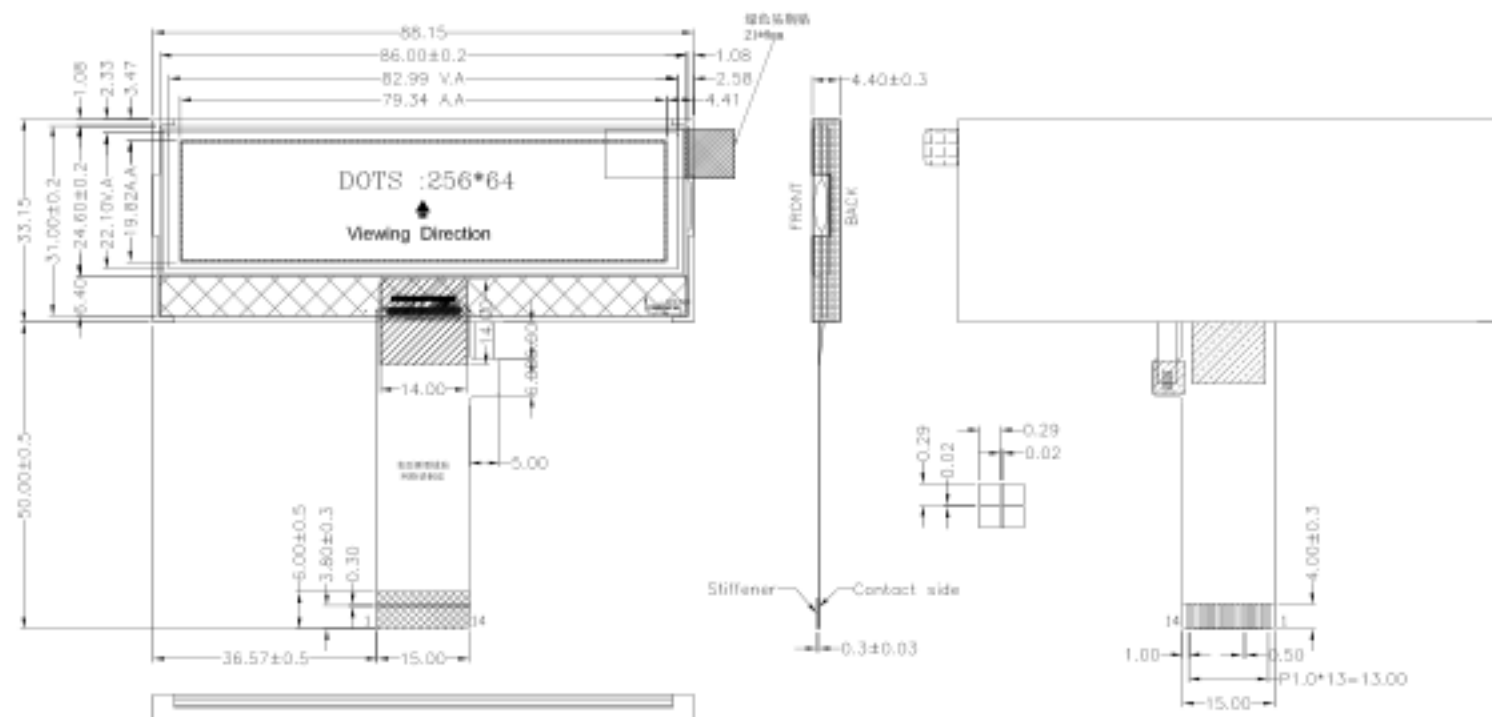

PIN	SYMBOL
1	VG
2	VQ
3	XVQ
4	CAP1P
5	CAP1N
6	VDD
7	VSS
8	CSO
9	AQ
10	RSTB
11	SCL
12	SDA
13	LEDA
14	LEDB

1. GENERAL TOLERANCE: $\pm 0.3\text{mm}$
2. THE PART OF *ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	DFSTN	BACKLIGHT COLOR	WHITE
POLARIZER TYPE	TRANSMISSIVE	FRAME TYPE	*****
DISPLAY TYPE	NEGATIVE	DATA TRANSFER	4SPI
LCD COLOR	WHITE-BLACK	CONNECTOR TYPE	FPC
VIEWING ANGLE	6:00	TECHNOLOGY	COG
OPERATING TEMP	-30°C ~ +80°C	DC-DC IC	Within
STORAGE TEMP	-40°C ~ +90°C	LCD DUTY	1/64
BACKLIGHT TYPE	*****	LCD BIAS	1/9
CONTROLLER IC	ST75256		RoHS
REMARKS	VDD=3.0V(typ) VLCD=8V±0.2V; VLED=3.0±0.2V@IF=75mA		

LED CIRCUIT DIAGRAM



ANHUI GOLDEN VISION LCD SCIENCE & TECHNOLOGY CO., LTD.

安徽金视界光电科技有限公司

PRODUCT NO.	GVH25664GFDL011-27917A					
CUSTOMER NO.						
DRAWN BY	HSF 2021.9.15	SCALE	1:1	REV.	V01	
CHECKED BY		PAGE	1/1			
APPROVED BY		UNIT	mm			

发至: ☐开发 ☐COG质量 ☐COB质量 ☐测架 ☐FAE