




**801X
SERIES**



SPECIFICATION

RATING	: 16(6)A 250V~ T55 (ENEC)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 55 °C
ELECTRICAL LIFE	: 10,000 CYCLES

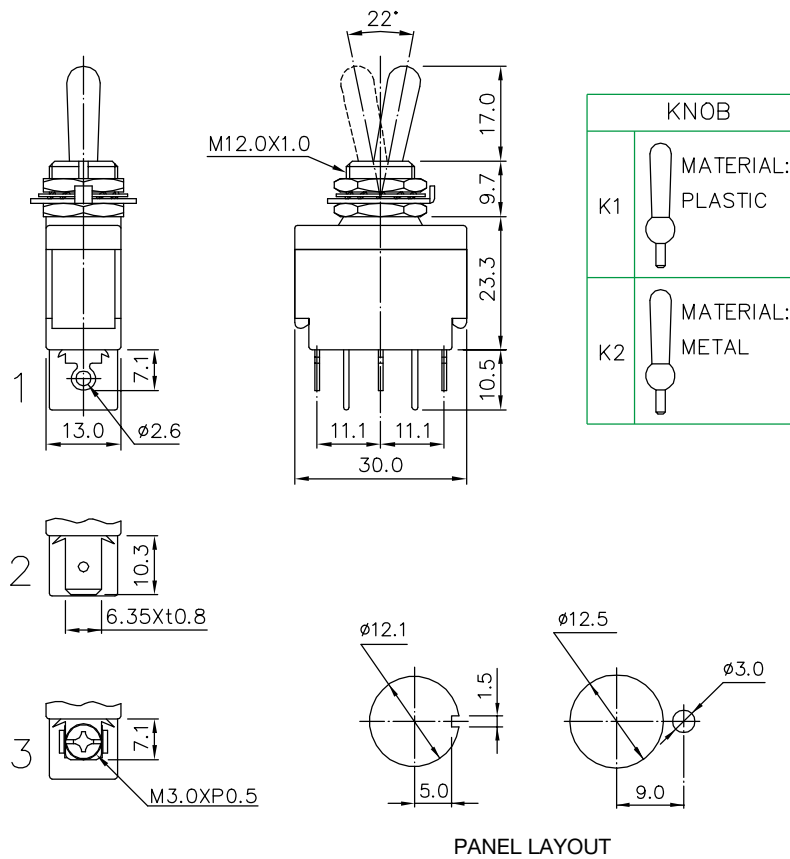

SWITCH FUNCTION

MODEL NO.	KEY WAY	KEY WAY	KEY WAY	OPERATIONS	APPROVAL
8011	ON	----	OFF	SPST	
8012	ON	----	ON	SPDT	
8013	ON	OFF	ON	SPDT	

TERMINAL'S TYPE

1	SOLDER TERMINAL
2	QUICK TERMINAL
3	SCREW TERMINAL