

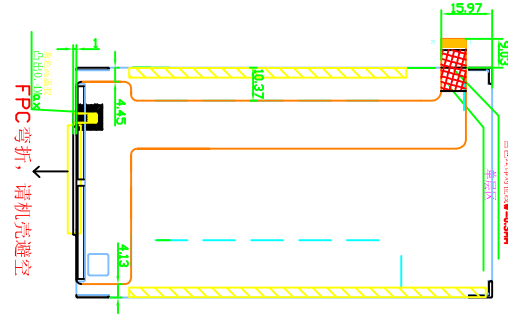
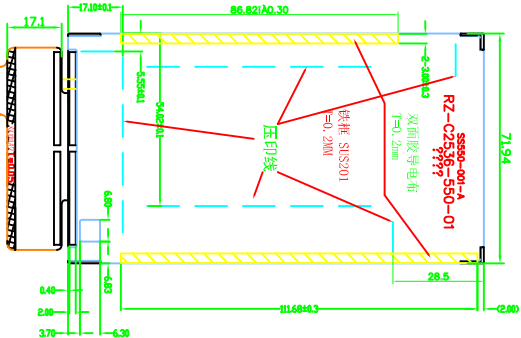
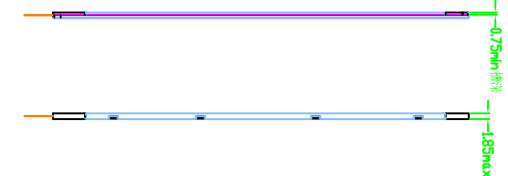


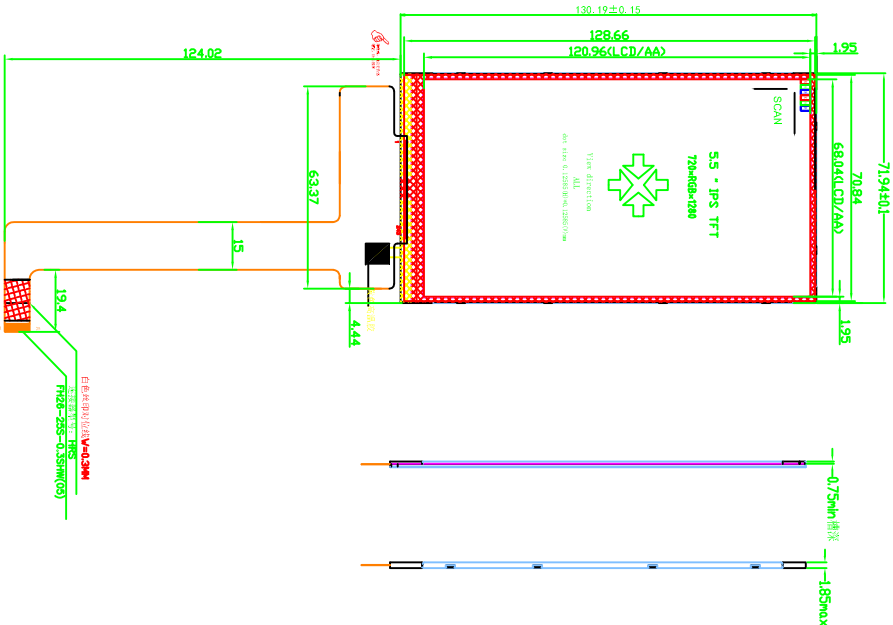

1	LED-
2	LED+
3	NC
4	GND
5	DATAN0
6	DATAP0
7	GND
8	DATAN1
9	DATAP1
10	GND
11	CLKN
12	CLKP
13	GND
14	NC
15	NC
16	GND
17	NC
18	NC
19	GND
20	GND
21	RESET
22	LPT E
23	VCC(2.8V)
24	LCD-ID
25	IDVCC(1.8V)

FPC弯折参考图
折弯出货

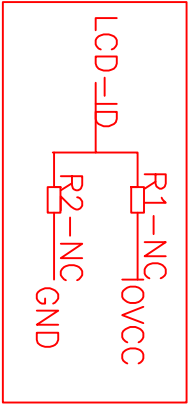

Remark: MIPI 2 LANE VIDEO MODE

深圳市盛世伟业光电有限公司

LED CIRCUIT DIAGRAM:



LED=19.2V

- NOTES:
- 1.DISPLAY TYPE: MAIN LCD a-si 16.7M HSD 5.5" TFT Transmissive
 - 2.OPERATING TEMP: -20° C~60° C;STORAGE TEMP: -30° C~70° C
 - 3.MAIN LCD DRIVER IC:ST7703
 - 4.OPTIMUM VIEWING ANGLE: ALL
 - 5.BACKLIGHT:14 CHIP WHITE LED;(40mA/LED)
 - 6.GENERAL TOLERANCE:±0.2(φmm)
 - 7.MARK"*"IS THE IMPORTANT DIMENSION,MARK"△"IS THE CHANGEABLE DIMENSION
 - 8.ROHS COMPLIANCY