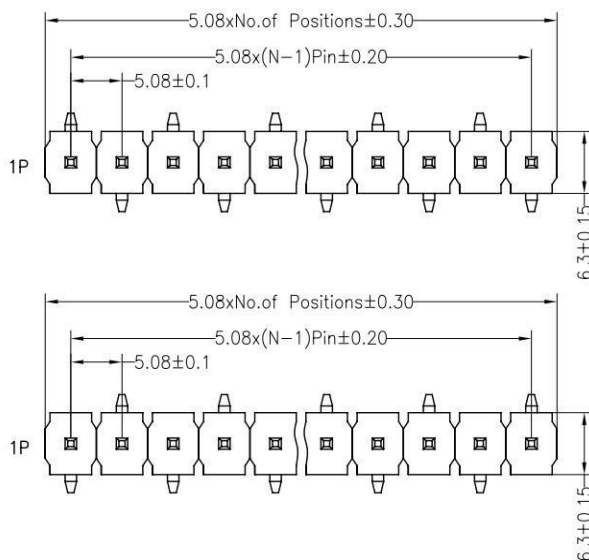
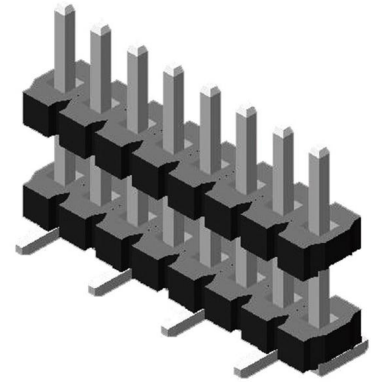

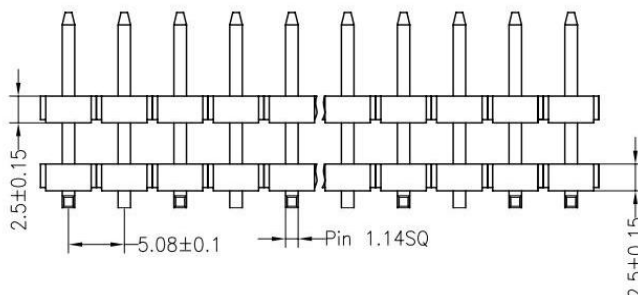
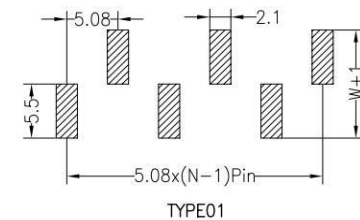
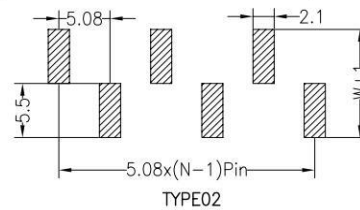


SPECIFICATIONS:

Rated Current	7.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au over Ni
Insulator Material	LCP
Max. Processing Temp:	230°C for 30-60 seconds 260°C for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ±0.05)

Dimension antitheses list					
ITEM	PA	PB	D	W	L
Standard	8.00	6.50	0.40	10.00	18.8
Alternate					

Ordering Information

HC Series	No. of Pin Per Row	Insulator Option	N	Plating	Type	PIN Length	Packing	End code
HC-PH22521 5.08mm Pin Header	1x02P	F=LCP		G0=Gold Flash	M=SMT	XXX	0=PE Bag	X
	1x20P			SN=Tin Plated			A=Tray	
				SM=Matted Tin			T=Tube	
							P=Tube+Cap	
							R=Reel+Cap	
							M=Reel+Mylar	
							X=Special	