
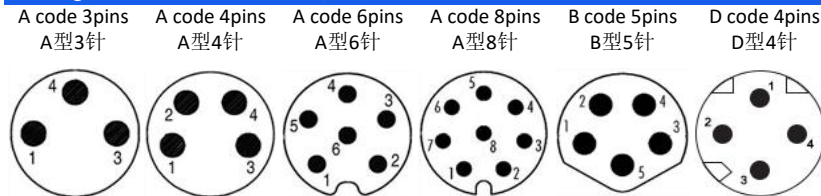


M8 male moldable connector with shielded/M8公头成型式连接器, 带屏蔽**Scale drawing/尺寸图****Product photo/产品图****Part number/产品料号**

Pins/针数	Code/型	Part number/产品料号
3pins/3针	A code/A型	8C097
4pins/4针	A code/A型	8C103
6pins/6针	A code/A型	8C057
8pins/8针	A code/A型	8C059
5pins/5针	B code/B型	8C105
4pins/4针	D code/D型	8C131

Pin assignment front view/针位分布前视图**General data/常规数据**

Pin numbers/针数	3pins/3针	4pins/4针	5pins/5针	6pins/6针	8pins/8针
Rated voltage/额定电压	60V	30V	30V	30V	30V
Rated current(40°C)/额定电流	3A	3A	3A	1A	1A
Standards/标准	IEC 61076-2-104				
Termination/焊接方式	Solder/焊接				
Connector locking system/锁紧方式	Screw/螺锁				
Degree of protection/防护等级	IP67, IP68, IP69K				
Wire gauge(mm²)/线规(平方数)	0.14mm²-0.34mm²			0.14mm²	
Wire gauge(AWG)/线号(平方数)	26AWG-22AWG			26AWG	
Mechanical operation/插拔次数	>100 mating cycles/大于100次				
Ambient temperature (operation)/操作温度	-25°C~+85°C				
Contact resistance/接触电阻	≤5mΩ				
Insulation resistance/绝缘电阻	≥100MΩ				
Connector body/胶芯	TPU				
Pin/端子	Brass with gold plated/黄铜镀金				
Screw/螺丝	Brass with nickel plated/黄铜镀镍				
Shielded shell/屏蔽罩	Brass with nickel plated/黄铜镀镍				
Customs tariff number/海关编码	8538900000				
Environmental compliance/环境符合标准	RoHs, Reach				