

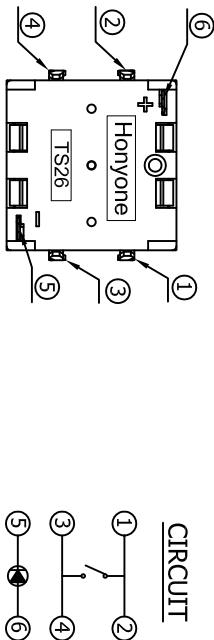
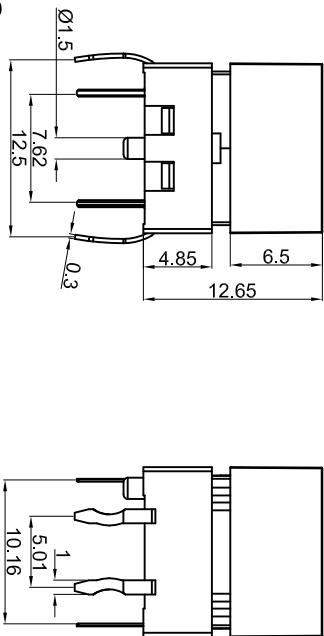


TS26

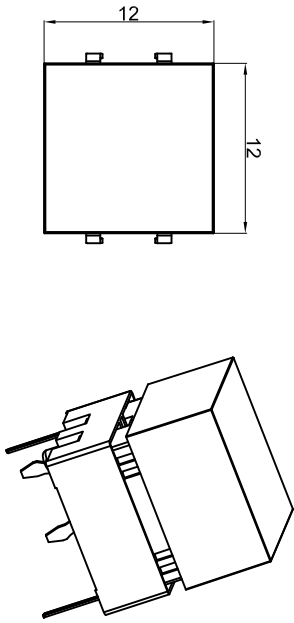

- Switch Specifications
- Circuit :SPST
 - Current rating :50mA
 - Voltage rating :12VDC
 - Dielectric withstanding voltage :250VAC for 1 minute
 - Contact resistance :100mΩ Max. (Initial)
 - Insulation resistance :100MΩ Min.
 - Operating force :250±50gf
 - Total travel :0.4mm±0.15mm
 - Operating life :200,000 cycles Min
 - Solder specifications :260 ° C for 5 seconds
 - Function :Momentary
 - Operating temperature :-20 ° C ~ +70 ° C

P.C.B.LAYOUT



LED Specifications

W	白色	2.8	3.2	3.6	4.0
R	红色	2.8	3.2	3.6	4.0
G	绿色	2.8	3.2	3.6	4.0
U	蓝色	2.8	3.2	3.7	4.0
Y	黄色	1.8	2.2	2.6	4.0
R	红色	1.8	2.0	2.5	4.0
灯发光颜色 X	最小	一般	最大	最大操作电流 (mA)	
Emitted color X	最小	一般	最大	最大操作电流 (mA)	

Note:
1.This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing. temperature of 350±5°and time is 3±0.5 seconds;
2.After the product is welded on the PCB board,it is prohibited to use any solvent to clean the PCB board,and avoid the influence of the inner product.

公差 TOLERANCES	.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°	单位 DIMENSION UNIT	mm.
视角 VIEWING ANGLE	比例尺 SCALE	NONE	日期 DATE	品名 TITLE	图号 DRAWING NO
A1	新加焊锡要求说明	N/A	2016.08.03	TS26-4TW-X-S	TS26-4TW-X-S_CP_A1
A0	New Issue	N/A	2016.05.19		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准 APPROVED BY	绘图 DRAWN BY
				Richard	Mashaofei