HSF RoHS

FILE NO :E362810

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass
Accepted pin:	Ø0.41 mm
Mechanical life:	min500 cycles
Rated current:	1A
Dielectric resistance:	Min 1000V RMS
Coplanarity SMD terminations:	max 0.1 mm(measured on 25 mm long connectors)

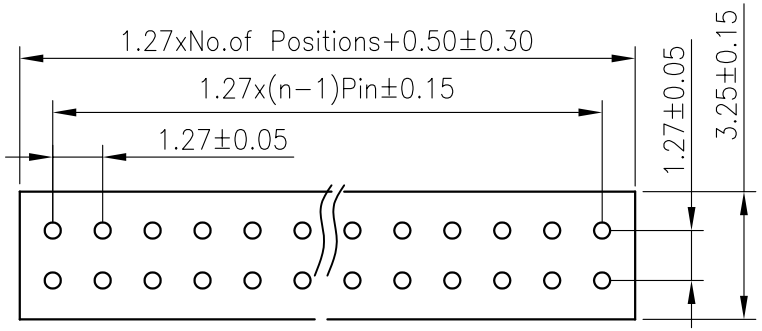

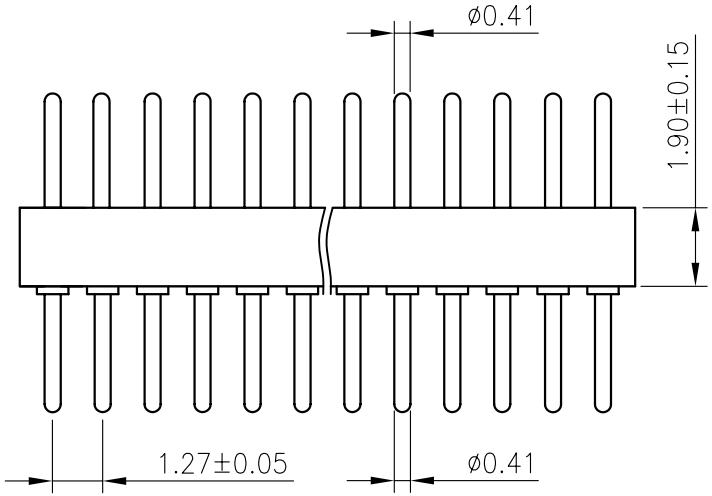

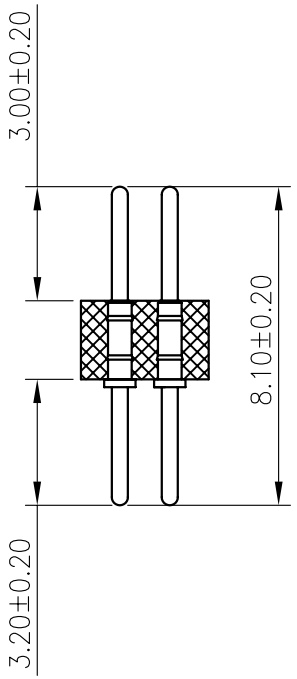

Ordering Information

3614 19 2 XX S XX 081 01

- 19 — Piastics Height 19=1.9mm
- 2 — No.of Pins 2X50
- XX — Contact Plating
  - SN:Tin
  - G0:Gold Flash
  - G2:2U"Gold
  - G3:3U"Gold
  - G4:5U"Gold
  - G5:10U"Gold
  - S0:Gold Flash/Tin
  - Standard:G0
- 081 — Pin Length 081=8.10mm

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.07.23	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	YiYuSheng	12.07.23
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JiLN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel：86-755-2997-5806/5802 Fax：86-755-2997-5992

PART NO.	3614192XXSXX08101
TITLE:	1.27X1.9 Machine Pin Header 180° L=8.1mm