


24F Indoor Mini Cable Fanout Patchcord

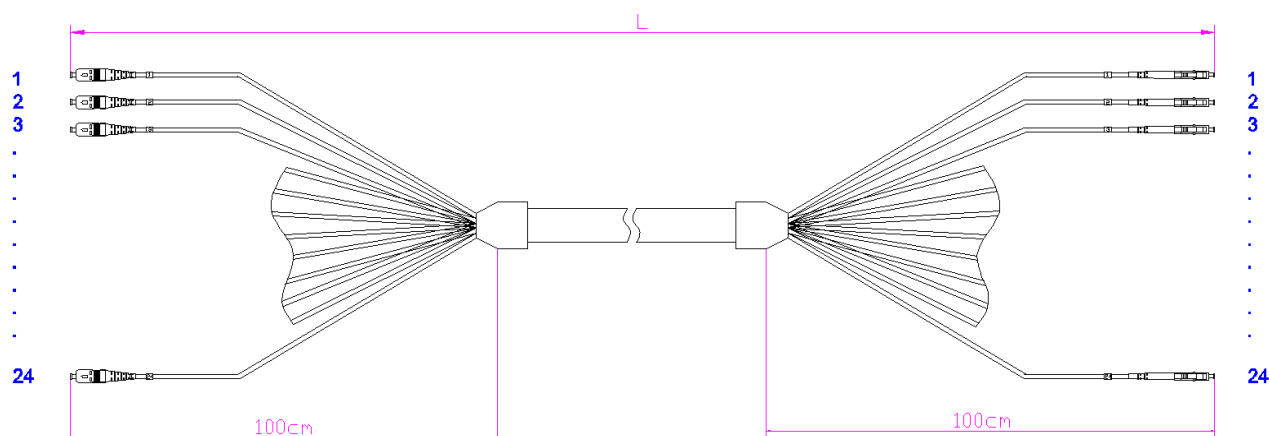

◆ Applications:

- CATV
- Telecommunication networks
- Active device termination
- Local area networks(LANS)
- Data processing networks
- Test equipment
- Wide area networks(WANS)

◆ Features:

- Low insertion loss and High reflection loss
- Good exchange ability
- Good durability
- High temperature stability
- Standard:Telcordia GR-326-CORE

◆ Specifications:

End face type	PC,UPC and APC
Fiber type	SM (G652/G655/G657) ; MM (OM1-OM5)
Cable Diameter	15.5mm (Fiber optic sub unit 2.0mm)
Insertion loss	≤ 0.3 dB
Return loss	UPC SM ≥ 50 dB , APC SM ≥ 60 dB, PC MM ≥ 35 dB
Repeatability	≤ 0.1
Durability	≤ 0.2 dB
Interchangeability	≤ 0.2 dB
Tensile strength	>70 N
Operating Temperature	-20℃~70℃
Storage Temperature	-40℃~80℃
Outer Sheath Material	PVC/LSZH
Bending radius (Static/Dynamic)	10D/20D
Length	Customized