
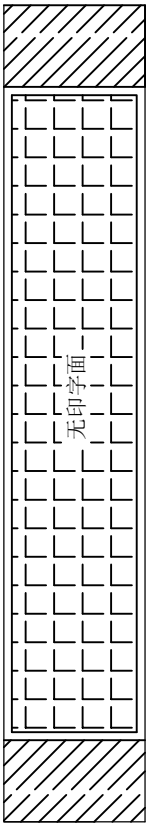
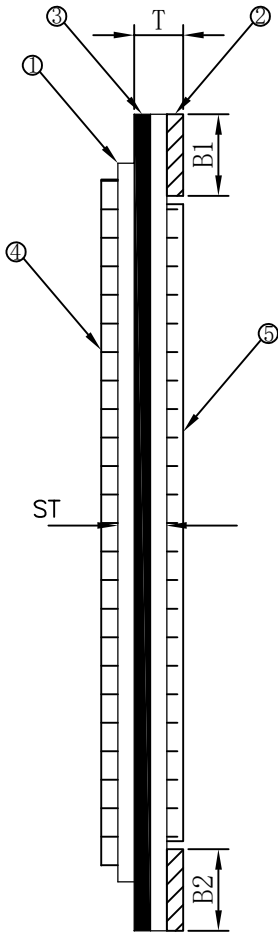



ROHS

A

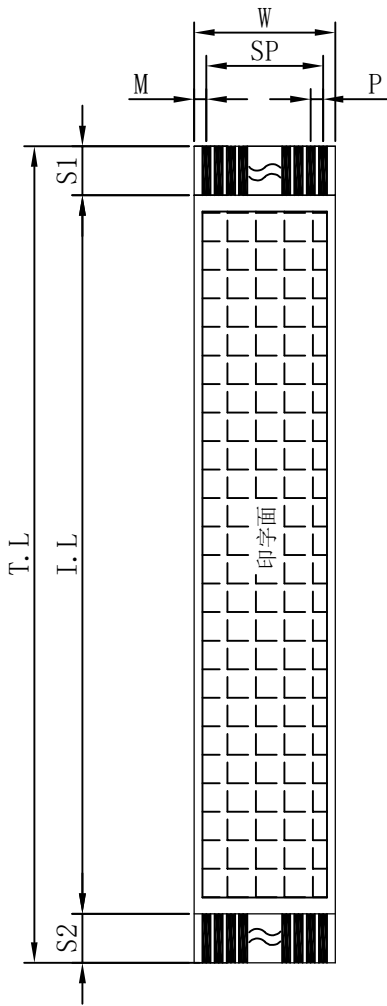

NOTES:

1. 成品之两端内外CB为0--0.5mm
2.



STRUCTURE				
NO	ITEM NAME	SPECIFICATION		REMARK
1	INSULATION (绝缘层)	印字UL20706 60um 客供		105C,60V
		空白60um		
	印字	AWM 20706 105C 60V VW-1		
2	P/TAPE (补强板)	205um		
3	CONDUCTOR (镀锡线)	THICKNESS	0.05	±0.005
		WIDTH	0.3	±0.03
	CONDUCTOR (导体镀层)	PLATED	Sn(40u")	MIN
		PLATED		MIN
4	铝箔	W15*L18*T0.07		银色
5	铝箔	W15*L8*T0.07		银色

DIMENSION			
PITCH (间距)	P	0.5	±0.05
SPAN(全间距)	SP	14.5	±0.08
WIDTH(总宽度)	W	15.5	±0.08
MARGIN(边距)	M	0.5	±0.08
	M1		
INSERT THICKNESS (插入厚度)	T	0.31	±0.03
SURFACE THICKNESS (线身厚度)	ST	0.17	±0.03
PROTECTOR LENGTH (补强板长度)	B1	10.0	±1.0
	B2	10.0	±1.0
STRIP LENGTH (金手指长度)	S1	5.0	±0.5
	S2	5.0	±0.5
INSULATION LENGTH (绝缘层长度)	I.L	20.0	±1.0
TOTAL LENGTH (产品总长度)	T.L	30.0	±1.0
NO of PIN(导体数量)		54P	

HECON P/N HC-FFC-05-54-XXX-A-01				HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD			
				TITLE 0.5*54P*30-5/5/10/10 A			
				APPROVED			
				CHECKED		CUSTOMER	
				DRAWN		REV	A
SER	DESCRIPTION	CHK	DATE	UNIT mm		SIZE A4	SHEET 1/1