MASONLED

Stock Code : 002654

www.masonled.com

URBAN LIGHTING
MS-AL03



LUMINAIRE

- Die-cast aluminium body (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Wiring on removable galvanized steel tray.
- Driver protected against voltage surges up to 4kV.
- Screen made of 4mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at LM80.
- It complies with standards EN 60598-1 and EN 60598-2-3.

INSTALLATION

- Post-top installation (Ø60mm reduction).
- Supplied with power cable ended (0.3m)

These fittings are suitable for the modern control systems.
For the various possibilities, please see section "Controlling the light"

STANDARD PRODUCT		AVAILABLE OPTIONS
Wiring	ON/OFF (A)	DAYLIGHT SENSOR
CCT	5000K	3000K, 4000K, 6500K
Colour	●	●



MS-AL03




STANDARD COLOUR






DIMENSIONS



Code	Optic	Luminaire	CCT	CRI	Class	Wiring	Power Supply	A mm	B mm
MS-AL03-40W	110°	40W, 5200lm	5000K	80	I	ON/OFF	100-277V 50/60Hz	320	165
MS-AL03-70W	110°	70W, 9100lm	5000K	80	I	ON/OFF	100-277V 50/60Hz	380	165
MS-AL03-100W	110°	100W, 13000lm	5000K	80	I	ON/OFF	100-277V 50/60Hz	380	165

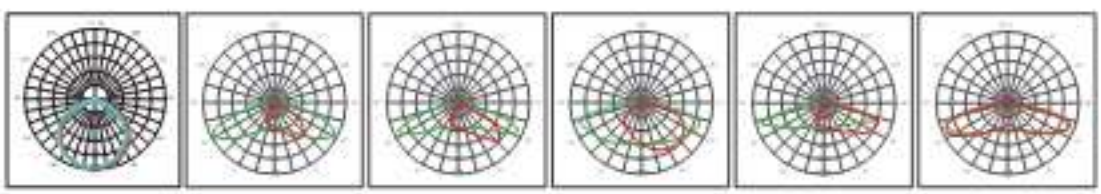

110° Type2-M Type3-S Type3-M Type4-M Type5-M

