


# UL 1061 Hook-up Wire 连接线

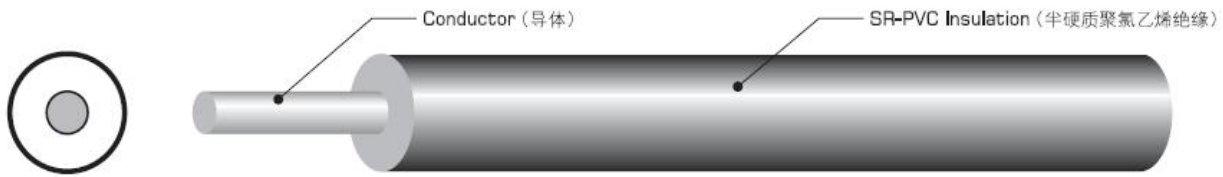

## Product Description:

- ★ Rated temperature: 80°C  
Rated voltage: 300V
- ★ Reference Standard: UL Subject 758, UL1581 & CSA C22.2 NO.210.2
- ★ Tinned or bare, stranded or solid copper conductor, 30-16 AWG
- ★ Colour-coded lead free SR-PVC insulation
- ★ Uniform insulation thickness to ensure easy stripping and cutting
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Application: For internal wiring of electronic and electrical equipment, protection is required where mechanical damage is possible

| Conductor |          |         | Insulation     |              | Maximum Resistance at 20°C<br>Ω /km |
|-----------|----------|---------|----------------|--------------|-------------------------------------|
| AWG       | No./mm   | Dia. mm | Nom. Thick. mm | Nom. Dia. mm |                                     |
| 30        | 7/0.1    | 0.30    | 0.26           | 0.82         | 354                                 |
| 28        | 7/0.127  | 0.38    | 0.26           | 0.90         | 223                                 |
| 26        | 7/0.16   | 0.48    | 0.26           | 1.00         | 139                                 |
| 24        | 11/0.16  | 0.61    | 0.27           | 1.15         | 88.9                                |
| 22        | 17/0.16  | 0.76    | 0.26           | 1.28         | 57.5                                |
| 20        | 26/0.16  | 0.94    | 0.26           | 1.46         | 34.6                                |
| 18        | 41/0.16  | 1.18    | 0.26           | 1.70         | 23.3                                |
| 16        | 26/0.254 | 1.49    | 0.26           | 2.02         | 15.1                                |