HSF RoHS

FILE NO :E362810

Technical Specs:

Flammability:	PPS (UL 94V-O)
Sleeve:	Brass
Contact clip(6 finger):	C17200
Accepted pin:	Ø0.31 to 0.48mm
Forces:	(polished steel gauge Ø0.381mm)
--Insertion	0.6N typ
--Withdrawal	0.15N typ
Mechanical life:	min500 cycles
Rated current:	1A
Contact resistance:	max 20mΩ
Dielectric resistance:	Min 500V RMS

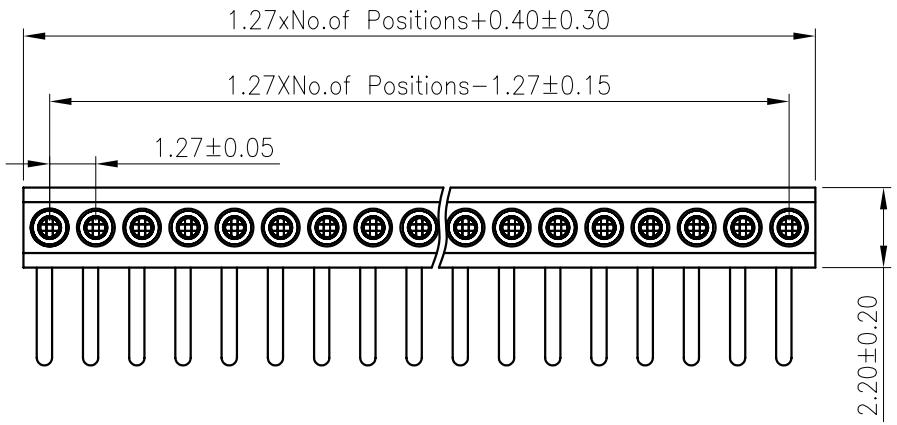

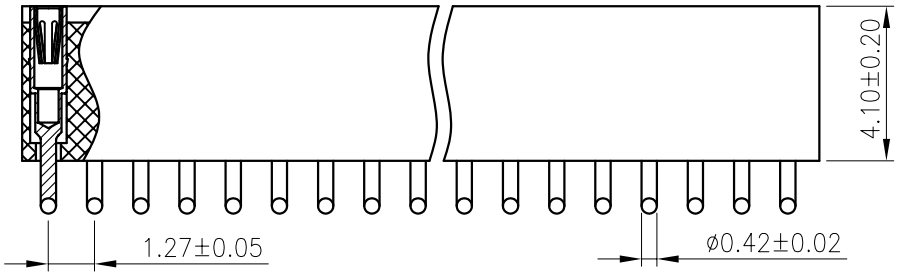

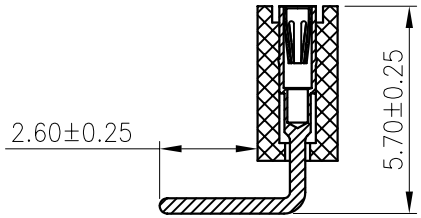

Ordering Information

3624 41 1 XX R XX 089 01

- Insulator Type Code: 1: Single row; 2: Doube row
- No.of Pins: 1x40Pins; 2x40Pins
- Contact Plating: SN:Tin; G0:Gold Flash; G2:2U"Gold; G3:3U"Gold; G4:5U"Gold; G5:10U"Gold; S0:Gold Flash/Tin; Standard:G0
- Pin Length: 089=8.9mm

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.04.01	NEW DRAWING	

OPERATION					
X.X	±0.30	DRAW	BEN	14.04.01	SCALE: FIT
X.XX	±0.20	CHECK			UNIT: mm
X.XXX	±0.10				SIZE: A4
Angle	±3°	APPROVE			SHEET: 1/1
DIM	TOL				PROJ.

JiLN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.	3624411XXRXX08901
TITLE:	1.27x4.1 Machine Female Header 90°/L=8.9