

Customer:





Customer INV.:

Customer Approve dy:

.....			
A0	1 ST DESIGN	NY	2009.12.14
A1	根据客户要求更改	NY	2009.12.14
A2	改高半透	NY	2010.01.2
A3	改电压	NY	2010.01.24


PIN FUNCTION :

PIN	Symbol	PIN	Symbol	PIN	Symbol
1	V0	11	VOUT-0	21	DB1
2	V1	12	VSS	22	DB0
3	V2	13	VDD	23	RD
4	V3	14	VDD	24	WR
5	V4	15	DB7	25	A0
6	VR	16	DB6	26	RST
7	INTRS	17	DB5	27	CS
8	VEXT	18	DB4	28	PS1
9	REF	19	DB3		
10	VOUT-1	20	DB2		

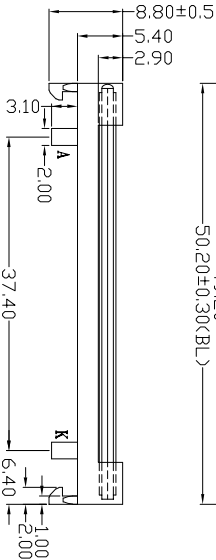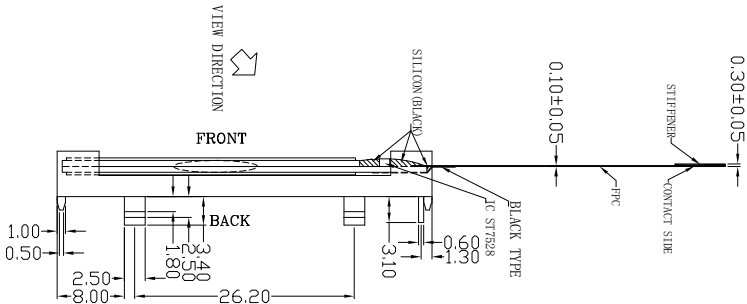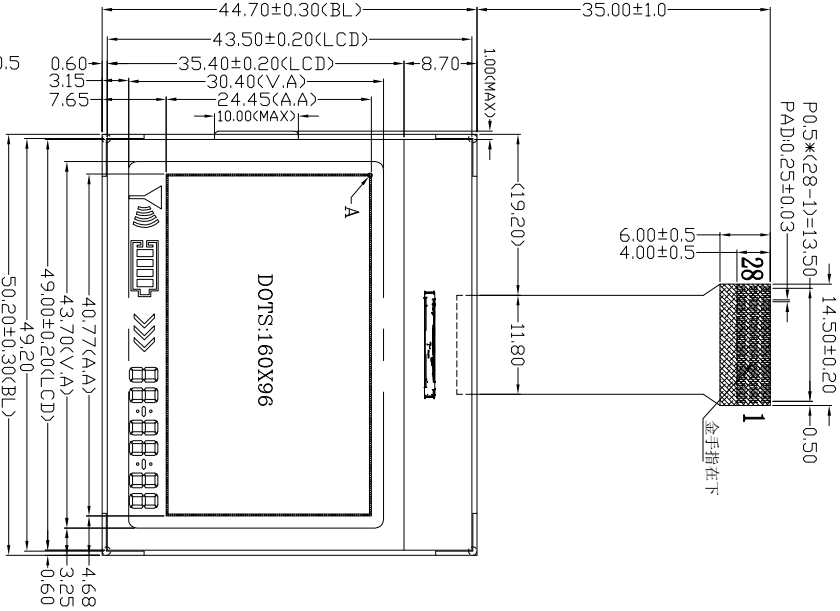

Note:

- 1.DISPLAY TYPE: FSTN/POSITIVE
- 2.LCD POLARIZER TYPE: TRANSFLECTIVE(P3)
- 3.VIEWING DIRECTION: 6:00 O'Clock
- 4.LCD OPERATING VOLTAGE: VDD=3.0V;VLCD=12.2V
- 5.OPERATING TEMP: -20~+70°C
- 6.DRIVE METHOD: -30~+80°C
- 7.LCD CONNECTOR: 1/97Duty, 1/10Bias
- 8.DISPLAY DRIVER: COG/(LCD+IC+FPC)+BL
- 9.BACK LIGHT: ST7528
- 10.Unspecified tolerance is ±0.20mm
- 11.ROHS Request



SCALE:1/1	UNIT:mm	DATE	PAGE:1/1	CHECK	VER:V1.
MODEL NO.:	GVH1609601-FGBW	APPROVE	CHECK	DESIGNEI	
PART NO.:					